



Product features

Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011269
NT 42	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: ProScreen 4 digit display + 2 LED bars
- Number of programs: 5
- Number of skin: 2
- Door clear height [mm]: 320
- Rack size [mm]: 400 x 400
- Water consumption of the washing cycle [l/basket]: 1,9
- Washing cycle time [s/basket]: 90-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011269	Boiler power [kW]	2.600
Net Width [mm]	466	Basin volume [l]	8
Net Depth [mm]	556	Tank power [kW]	0.600
Net Height [mm]	695	Water consumption of the washing cycle [l/basket]	1,9
Net Weight [kg]	45.00	Washing cycle time [s/basket]	90-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400
Boiler capacity [l]	2.60	Noise of device	54,3




Technical drawing

Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011269
NT 42	A group of articles - web	Undercounter, continuous and black ware dishwasher





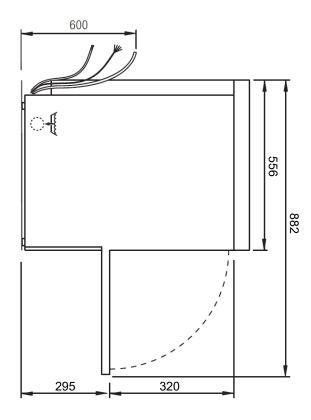





Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011269
NT 42	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort
- LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- Detergent dispensers

Double filter system

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
 - higher washing efficiency; longer life of the washing bath

Fast heating

Performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation
- Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- Double shell construction
 - stainless steel construction with insulated double jacket
 - quiet operation
 - energy saving
- **Energy saving**

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving
- Fast heating

performance management allows the current running of the boiler and basins body

- quick fault finding
- transfer of original recipes
- keeping software up to date



Technical parameters

Undercounter dishwasher double	e skin 40x40 - 230 V	
Model	SAP Code	00011269
NT 42	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011269		15. Number of programs: 5
2. Net Width [mm]: 466		16. Opening of device: Tilting down
3. Net Depth [mm]: 556		17. Door clear height [mm]: 320
4. Net Height [mm]: 695		18. Inlet pressure [bar]: 2-4
5. Net Weight [kg]: 45.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 516		20. Number of skin:
7. Gross depth [mm]: 606		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 745		22. Boiler capacity [l]: 2.60
9. Gross Weight [kg]: 48.00		23. Boiler power [kW]: 2.600
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 0.600
12. Material: Stainless steel		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 3.500		27. Arm connection: Click-clack - easy removal with one hand

14. Loading:

230 V / 1N - 50 Hz

28. Washing arm type:

Rotatable two-pronged



Technical parameters

Undercounter dishwasher double	skin 40x40 - 230 V	
Model	SAP Code	00011269
NT 42	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Washing arm material: Composite		41. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
30. Rinsing arm type: Rotating two-pronged		42. Hot water electric valve: Yes
31. Rinsing arm material: Composite		43. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
32. Deep drawn tank: Yes		44. Rack size [mm]: 400 × 400
33. Rack support: Pressed		45. Display type: ProScreen - 4 digit display + 2 LED bars
34. Tank surface strainers: composite		46. USB port: Yes, for Firmware actualisation
35. Drain filter: ArchiMedes - double filtration with ensures only 18% loss of clean water		47. Self-diagnostics: Yes
36. Thermostop: Yes		48. Wash pump type: two-way - DuoFlow
37. Boiler thermostat adjust: Yes		49. Detergent dispenser: Yes
38. Rack feed capacity: 24-30-40		50. Rinse aid dispenser: Yes
39. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump		51. Water consumption of the washing cycle [l/basket]:

40. Energy Saving system:

boiler temperature

EnergySaving - Energy saving system due to lowering the

52. Washing cycle time [s/basket]:

90-120-150



Technical parameters

Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011269
NT 42	A group of articles - web	Undercounter, continuous and black ware dishwasher
53. Rinse water temperature [°C]: 65		59. Program ProPlates: Yes
54. Standard equipment for device: 1x glass basket, 1x cutlery basket		60. Noise of device: 54,3
55. Program ProSpeed: Yes		61. Cross-section of conductors CU [mm²]:
56. Program ProFessional: Yes		62. Water supply connection: 3/4"
57. Program ProTemp: Yes		63. Diameter nominal: DN 50

58. Program ProSelf:

Yes