



| Combi convection steam oven STEAMBOX gas 10x GN 2/1 automatic cleaning boiler left door | | |
|---|---------------------------|---------------------|
| Model | SAP Code | 00014905 |
| STBB 1021 GL | A group of articles - web | Convection machines |




- Steam type: Symbiotic boiler and injection combination (patent)
- $\,-\,$ Number of GN / EN: 10
- GN / EN size in device: GN 2/1
- GN device depth: 65
- Control type: Touchscreen + buttons
- Display size: 9"
- Humidity control: MeteoSystem regulation based on direct measurement of humidity in the chamber (patented)
- Advanced moisture adjustment: Steamtuner 5-stage system of setting steam saturation by controlled combination of production by boiler or injection
- Delta T heat preparation: Yes
- Automatic preheating: Yes
- Multi level cooking: Drawer program control of heat treatment for each dish separately
- Door constitution: Vented safety double glass, removable for easy cleaning


| SAP Code | 00014905 | Type of gas | Natural Gas |
|---------------------|--------------------|------------------------|---|
| Net Width [mm] | 1120 | Steam type | Symbiotic - boiler and injection combination (patent) |
| Net Depth [mm] | 845 | Number of GN / EN | 10 |
| Net Height [mm] | 1115 | GN / EN size in device | GN 2/1 |
| Net Weight [kg] | 250.00 | GN device depth | 65 |
| Power electric [kW] | 3.300 | Control type | Touchscreen + buttons |
| Loading | 230 V / 1N - 50 Hz | Display size | 9" |
| Power gas [kW] | 27.000 | | |




Technical drawing

| Combi convection steam oven STEAMBOX gas 10x GN 2/1 automatic cleaning boiler left door | | |
|---|------------------------------|---------------------|
| Model | SAP Code | 00014905 |
| STBB 1021 GL | A group of articles - web | Convection machines |

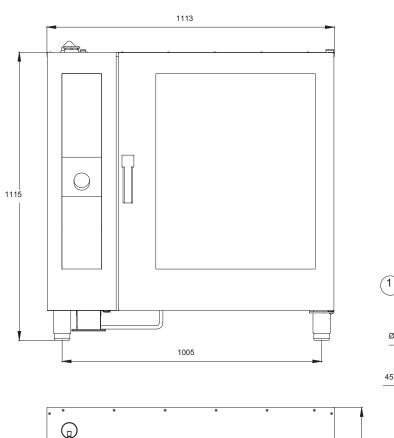

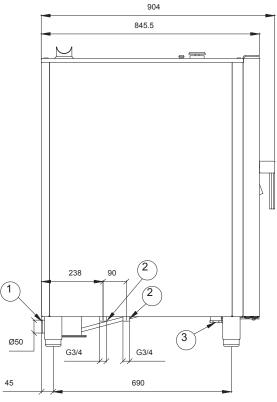

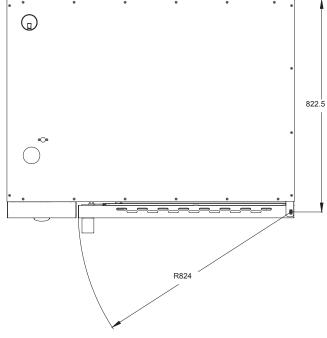

- 1 DRAIN
- 2 WATER INLET
- 3 POWER SUPPLY



Technical parameters

| Combi convection steam oven ST | EAMBOX gas 10x GN | 2/1 automatic cleaning boiler left door |
|--|---------------------------|---|
| Model | SAP Code | 00014905 |
| STBB 1021 GL | A group of articles - web | Convection machines |
| 1. SAP Code: 00014905 | | 14. Type of gas: Natural Gas |
| 2. Net Width [mm]: 1120 | | 15. Material: AISI 304 |
| 3. Net Depth [mm]: 845 | | 16. Exterior color of the device: Stainless steel |
| 4. Net Height [mm]: 1115 | | 17. Adjustable feet: Yes |
| 5. Net Weight [kg]: 250.00 | | 18. Humidity control: MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented) |
| 6. Gross Width [mm]: 1320 | | 19. Stacking availability: Yes |
| 7. Gross depth [mm]: 1130 | | 20. Control type: Touchscreen + buttons |
| 8. Gross Height [mm]: 1240 | | 21. Additional information: Version with left door (hinges on the left, handle on the right) |
| 9. Gross Weight [kg]: 260.00 | | 22. Steam type: Symbiotic - boiler and injection combination (patent) |
| 10. Device type: Combined unit | | 23. Chimney for moisture extraction: Yes |
| 11. Power electric [kW]: 3.300 | | 24. Delayed start: Yes |
| 12. Loading: 230 V / 1N - 50 Hz | | 25. Display size: 9" |
| 13. Power gas [kW]: | | 26. Delta T heat preparation: |

Yes

27.000



Technical parameters

| Combi convection steam oven ST | EAMBOX gas 10x GN 2/1 | automatic cleaning boiler left door |
|---|---------------------------|---|
| Model | SAP Code | 00014905 |
| STBB 1021 GL | A group of articles - web | Convection machines |
| 27. Automatic preheating: Yes | | 40. Reversible fan: Yes |
| 28. Automatic cooling: Yes | | 41. Sustaince box: Yes |
| 29. Cold smoke-dry function: Yes | | 42. Probe: Yes |
| 30. Unified finishing of meals EasyService: Yes | | 43. Shower: Hand winder |
| 31. Night cooking: Yes | | 44. Distance between the layers [mm]: 70 |
| 32. Washing system: Closed - efficient use of water and repeated pumping | washing chemicals by | 45. Smoke-dry function: Yes |
| 33. Detergent type: Liquid washing detergent + liquid rinse aid/vinegar or washing tablets | | 46. Interior lighting: Yes |
| 34. Multi level cooking: Drawer program - control of heat treatment for each dish separately | | 47. Low temperature heat treatment: Yes |
| 35. Advanced moisture adjustment: Steamtuner - 5-stage system of setting steam saturation by controlled combination of production by boiler or injection | | 48. Number of fans: |
| 36. Slow cooking: from 30 °C - the possibility of rising | | 49. Number of fan speeds: |
| 37. Fan stop: Immediate when the door is opened | | 50. Number of programs: |
| 38. Lighting type: LED lighting in the doors, on both sides | | 51. USB port: Yes, for uploading recipes and updating firmware |

39. Cavity material and shape:

AISI 304, with rounded corners for easy cleaning

52. Door constitution:

Vented safety double glass, removable for easy cleaning



Technical parameters

| Combi convection steam oven STEAMBOX gas 10x GN 2/1 automatic cleaning boiler left door | | |
|---|---------------------------|---|
| Model | SAP Code | 00014905 |
| STBB 1021 GL | A group of articles - web | Convection machines |
| 53. Number of preset programs: 100 | | 60. GN / EN size in device: GN 2/1 |
| 54. Number of recipe steps: 9 | | 61. GN device depth: 65 |
| 55. Minimum device temperature [°C]: 30 | | 62. Food regeneration: Yes |
| 56. Maximum device temperature [°C]: 300 | | 63. Connection to a ball valve: 1/2 |
| 57. Device heating type: Combination of steam and hot air | | 64. Cross-section of conductors CU [mm²]: 0,75 |
| 58. HACCP: Yes | | 65. Diameter nominal: DN 50 |
| 59. Number of GN / EN: | | 66. Water supply connection: |

3/4"

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

10