



Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011967	Power electric [kW]	10.500
Net Width [mm]	720	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	780	Water consumption of the washing cycle [l/basket]	3
Net Height [mm]	1730	Door clear height [mm]	650
Net Weight [kg]	148.00	Rack size [mm]	560 x 630



Technical drawing

Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

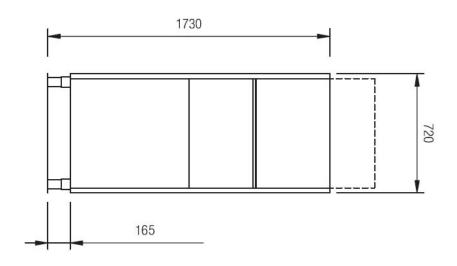

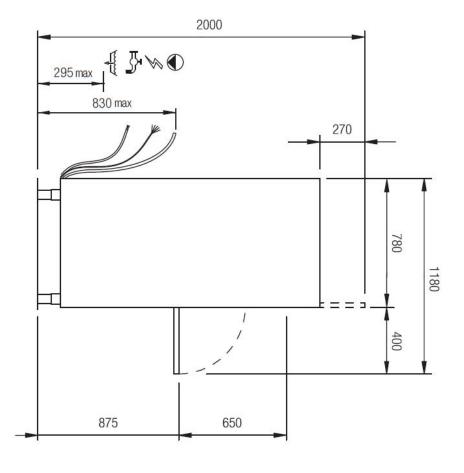





Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

1

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

easy cleaning, high hygiene standard, long service life

2

Stainless steel washing arms

upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

easy and safe handling during cleaning; higher user comfort

3

LED Display

smartScreen, a large color graphic display showing the washing progress

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

Double pump

unique two-way DuoFlow pump

 distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

6

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

higher washing efficiency; longer life of the washing bath

7

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

8

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

9

Double shell construction

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

10

Fast heating

performance management allows the current running of the boiler and basins body

- guick first warm-up of the dishwasher
- smooth operation

11

Air break tank

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization



Technical parameters

Pot and pan washer double skin w	ith drain pump 55x6	61 - 400 V
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011967		15. Number of programs:
2. Net Width [mm]: 720		16. Opening of device: Tilting down
3. Net Depth [mm]: 780		17. Door clear height [mm]: 650
4. Net Height [mm]: 1730		18. Inlet pressure [bar]: 2-4
5. Net Weight [kg]: 148.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 870		20. Number of skin:
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Number of arms for both rinsing and washing:
9. Gross Weight [kg]: 157.00		23. Arm connection: Click-clack - easy removal with one hand
10. Device type: Electric unit		24. Washing arm type: Rotating trident
11. Control type: Digital		25. Washing arm material: Composite
12. Material: AISI 304		26. Atmospheric boiler with rinse pump: Yes
13. Power electric [kW]: 10.500		27. Rinsing arm type: Rotating trident
14. Loading:		28. Rinsing arm material:

400 V / 3N - 50 Hz

Composite



Technical parameters

P	ot and pan washer double skin v	vith drain pump 55x61 -	400 V
M	Iodel	SAP Code	00011967
S	S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
29.	Deep drawn tank: Yes		40. Hot water electric valve: Yes
30.	O. Rack support: Pressed		41. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
31.	1. Tank surface strainers: stainless steel		42. Rack size [mm]: 560 × 630
32.	32. Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		43. Display type: LCD multifunction display
33.	3. Thermostop: Yes		44. USB port: Yes, for Firmware actualisation
34.	4. Boiler thermostat adjust: Yes		45. Drain pump: Yes
35.	5. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump		46. Self-diagnostics: Yes
36.	6. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature		47. Wash pump type: two-way - DuoFlow
37.	7. Rinse system: ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure		48. Detergent dispenser: Yes
38.	38. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle		49. Rinse aid dispenser: Yes

50. Water consumption of the washing cycle [l/basket]:

39. Quick heating system:

QuickReady - System for rapid heating of water in the tank

3



Technical parameters

Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
51. Rinse water temperature [°C]: 80-85		59. Program ProEco: Yes
52. Program ProFessional 2: Yes		60. Program ProLong: Yes
53. Program ProFessional 4: Yes		61. Program ProActive 5: Yes
54. Program ProFessional 6: Yes		62. Program ProActive 7: Yes
55. Program ProFessional 8: Yes		63. Cross-section of conductors CU [mm²]: 2,5
56. Program ProFessional 10: Yes		64. Water supply connection: 3/4"
57. Program ProClean: Yes		65. Diameter nominal: DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

58. Program ProDrain:

Yes