

Technical data sheet

Product features



Pot and pan washer double skin 50x60 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011964 |
| S 97 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 405
- Rack size [mm]: 500 x 600
- Water consumption of the washing cycle [l/basket]: 2,4
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

| | | | |
|----------------------------|--------------------|--|-----------|
| SAP Code | 00011964 | Boiler capacity [l] | 6.00 |
| Net Width [mm] | 600 | Boiler power [kW] | 6.000 |
| Net Depth [mm] | 700 | Basin volume [l] | 23 |
| Net Height [mm] | 1290 | Tank power [kW] | 2.100 |
| Net Weight [kg] | 69.00 | Water consumption of the washing cycle [l/basket] | 2,4 |
| Power electric [kW] | 8.800 | Door clear height [mm] | 405 |
| Loading | 400 V / 3N - 50 Hz | Rack size [mm] | 500 x 600 |



Technical data sheet

Technical drawing



Pot and pan washer double skin 50x60 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011964 |
| S 97 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

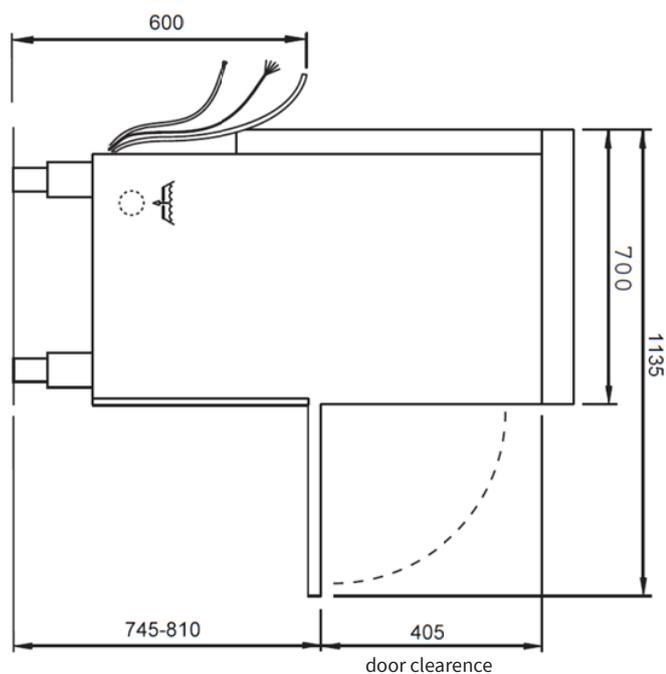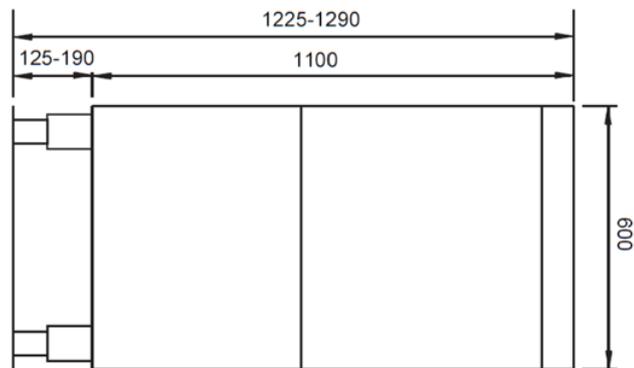

Technical data sheet

Product benefits



Pot and pan washer double skin 50x60 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011964 |
| S 97 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

1 **Stainless steel outer shell construction**
round construction with stainless steel, rounded edges, Deep-drawn bathtub
– easy cleaning, high hygiene standard, long service life

2 **Stainless steel washing arms**
upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm
– easy and safe handling during cleaning; higher user comfort

3 **LED Display**
smartScreen, a large color graphic display showing the washing progress
– easy control of the dishwasher operation
– continuous information on the status of the wash cycle
– diagnostics in the event of a fault

4 **Double pump**
unique two-way DuoFlow pump
– distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5 **Detergent dispensers**
two detergent and rinse aid dispensers
– precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

6 **Double filter system**
the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
– higher washing efficiency; longer life of the washing bath

7 **Energy saving**
energy saving energy saving system due to lowering the temperature of the boiler
– cost saving

8 **Protection of fragile dishes**
softstart system for gradual start of washing programs to protect fragile dishes
– protects stemmed glasses and other fragile utensils

9 **Double shell construction**
stainless steel construction with insulated double jacket
– quiet operation
– energy saving

10 **Fast heating**
performance management allows the current running of the boiler and basins body
– quick first warm-up of the dishwasher
– smooth operation

11 **Air break tank**
the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse
– possibility to use in HACCP systems water temperature suitable for sterilization

Technical data sheet

Technical parameters



Pot and pan washer double skin 50x60 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011964 |
| S 97 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

1. SAP Code:

00011964

2. Net Width [mm]:

600

3. Net Depth [mm]:

700

4. Net Height [mm]:

1290

5. Net Weight [kg]:

69.00

6. Gross Width [mm]:

700

7. Gross depth [mm]:

800

8. Gross Height [mm]:

1250

9. Gross Weight [kg]:

75.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

AISI 304

13. Power electric [kW]:

8.800

14. Loading:

400 V / 3N - 50 Hz

15. Number of programs:

11

16. Opening of device:

Tilting down

17. Door clear height [mm]:

405

18. Inlet pressure [bar]:

2-4

19. Adjustable feet:

Yes

20. Number of skin:

2

21. Self-cleaning cycle:

Yes

22. Boiler capacity [l]:

6.00

23. Boiler power [kW]:

6.000

24. Basin volume [l]:

23

25. Tank power [kW]:

2.100

26. Number of arms for both rinsing and washing:

2

27. Arm connection:

Click-clack - easy removal with one hand

28. Washing arm type:

Rotating trident

Technical data sheet

Technical parameters



Pot and pan washer double skin 50x60 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011964 |
| S 97 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

29. Washing arm material:

Composite

30. Atmospheric boiler with rinse pump:

Yes

31. Rinsing arm type:

Rotating trident

32. Rinsing arm material:

Composite

33. Deep drawn tank:

Yes

34. Rack support:

Pressed

35. Tank surface strainers:

stainless steel

36. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

37. Thermostop:

Yes

38. Boiler thermostat adjust:

Yes

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

40. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

41. Rinse system:

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

42. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

43. Quick heating system:

QuickReady - System for rapid heating of water in the tank

44. Hot water electric valve:

Yes

45. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

46. Rack size [mm]:

500 x 600

47. Display type:

LCD multifunction display

48. USB port:

Yes, for Firmware actualisation

49. Self-diagnostics:

Yes

50. Wash pump type:

two-way - DuoFlow

Technical data sheet

Technical parameters



Pot and pan washer double skin 50x60 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011964 |
| S 97 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

51. Detergent dispenser:

Yes

52. Rinse aid dispenser:

Yes

53. Water consumption of the washing cycle [l/basket]:

2,4

54. Rinse water temperature [°C]:

80

55. Additional information:

Also possible: 230 V / 3N or 230 V / 1N (must be specified when ordering)

56. Program ProFessional 2:

Yes

57. Program ProFessional 4:

Yes

58. Program ProFessional 6:

Yes

59. Program ProFessional 8:

Yes

60. Program ProFessional 10:

Yes

61. Program ProSelf:

Yes

62. Program ProEco:

Yes

63. Program ProLong:

Yes

64. Program ProPlates:

Yes

65. Program ProSteel:

Yes

66. Program ProSan:

Yes

67. Cross-section of conductors CU [mm²]:

2,5

68. Water supply connection:

3/4"

69. Diameter nominal:

DN 50