



Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 850
- Rack size [mm]: 700 x 700
- Water consumption of the washing cycle [l/basket]: 4
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011973	Boiler capacity [l]	12.00
Net Width [mm]	850	Boiler power [kW]	8.000
Net Depth [mm]	850	Basin volume [l]	68
Net Height [mm]	1930	Tank power [kW]	8.000
Net Weight [kg]	181.00	Water consumption of the washing cycle [l/basket]	4
Power electric [kW]	18.700	Door clear height [mm]	850
Loading	400 V / 3N - 50 Hz	Rack size [mm]	700 x 700



Technical drawing

Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

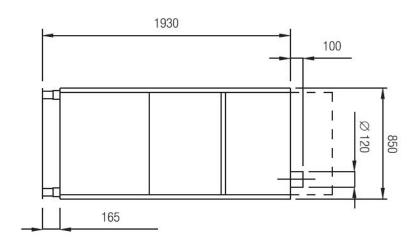

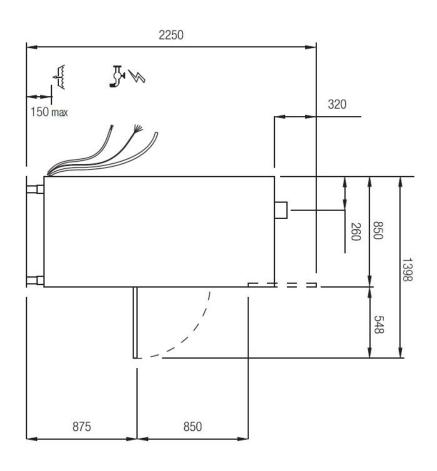





Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Stainless steel washing arms upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm
  - easy and safe handling during cleaning; higher user comfort
- **LED Display** smartScreen, a large color graphic display showing the washing progress
  - easy control of the dishwasher operation
  - continuous information on the status of the wash cycle
  - diagnostics in the event of a fault
  - **Double pump** unique two-way DuoFlow pump
    - distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- **Detergent dispensers** two detergent and rinse aid dispensers
  - precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- **Double filter system** the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
  - higher washing efficiency; longer life of the washing bath
- **Energy saving** energy saving energy saving system due to lowering the temperature of the boiler
  - cost saving

**Protection of fragile dishes** 

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- **Double shell construction** stainless steel construction with insulated double jacket
  - quiet operation energy saving
- **Fast heating** 10 performance management allows the current running of the boiler and basins body
  - guick first warm-up of the dishwasher
  - smooth operation

Air break tank the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

> possibility to use in HACCP systems water temperature suitable for sterilization

e-mail: rmgastro@rmgastro.com

web: www.rmgastro.com



#### Technical parameters

Pot and pan washer double skin	with drain pump 70x	70 - 400 V
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>1. SAP Code:</b> 00011973		<b>15. Number of programs:</b>
2. Net Width [mm]: 850		<b>16. Opening of device:</b> Tilting down
3. Net Depth [mm]: 850		17. Door clear height [mm]: 850
4. Net Height [mm]: 1930		<b>18. Inlet pressure [bar]:</b> 1-6
5. Net Weight [kg]: 181.00		19. Adjustable feet:  Yes
6. Gross Width [mm]: 1000		20. Number of skin:
7. Gross depth [mm]: 950		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Boiler capacity [ l ]: 12.00
9. Gross Weight [kg]: 191.00		23. Boiler power [kW]: 8.000
10. Device type: Electric unit		24. Basin volume [l]: 68
11. Control type: Digital		25. Tank power [kW]: 8.000
<b>12. Material:</b> AISI 304		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 18.700		27. Arm connection:  Hand loosen/tighten screw
14. Loading:		28. Washing arm type:

400 V / 3N - 50 Hz

Rotating trident



#### Technical parameters

Pot and pan washer double skin w	vith drain pump 70x70 -	400 V
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>29. Washing arm material:</b> Stainless steel		<b>40. Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the boiler temperature
<b>30. Atmospheric boiler with rinse pump:</b> Yes		<b>41. Rinse system:</b> UltraRinse2 - stainless steel rinsing arms including stainless steel nozzles with a geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure
31. Rinsing arm type: Rotating trident		<b>42. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
32. Rinsing arm material: Stainless steel		<b>43. Quick heating system:</b> QuickReady - System for rapid heating of water in the tank
33. Deep drawn tank: Yes		<b>44. Hot water electric valve:</b> Yes
34. Rack support: Pressed		<b>45. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
<b>35. Tank surface strainers:</b> stainless steel		<b>46. Rack size [mm]:</b> 700 × 700
<b>36. Drain filter:</b> Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		<b>47. Display type:</b> LCD multifunction display
37. Thermostop: Yes		<b>48. USB port:</b> Yes, for Firmware actualisation
38. Boiler thermostat adjust: Yes		<b>49. Drain pump:</b> Yes

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

50. Self-diagnostics:

Yes



#### Technical parameters

Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>51. Wash pump type:</b> two-way - DuoFlow		<b>61. Program ProClean:</b> Yes
<b>52. Detergent dispenser:</b> Yes		<b>62. Program ProDrain:</b> Yes
53. Rinse aid dispenser: Yes		<b>63. Program ProEco:</b> Yes
54. Water consumption of the washing cycle [l/basket]:		<b>64. Program ProLong:</b> Yes
<b>55. Rinse water temperature [°C]:</b> 80-85		<b>65. Program ProActive 5:</b> Yes
<b>56. Program ProFessional 2:</b> Yes		<b>66. Program ProActive 7:</b> Yes
<b>57. Program ProFessional 4:</b> Yes		67. Cross-section of conductors CU [mm²]:
<b>58. Program ProFessional 6:</b> Yes		<b>68. Water supply connection:</b> 3/4"
59. Program ProFessional 8: Yes		<b>69. Diameter nominal:</b> DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

60. Program ProFessional 10:

Yes