



| Undercounter dishwasher double skin with drain pump 50x50 - 400 V | | |
|---|---------------------------|--|
| Model | SAP Code | 00011287 |
| NT 52 TP | A group of articles - web | Undercounter, continuous and black ware dishwasher |



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: ProScreen 4 digit display + 2 LED bars
- Number of programs: 8
- Number of skin: 2
- Door clear height [mm]: 465
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 1,8
- Washing cycle time [s/basket]: 60-90-180
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste


| SAP Code | 00011287 | Boiler power [kW] | 6.000 |
|-----------------------|--------------------|---|-----------|
| Net Width [mm] | 600 | Basin volume [l] | 15 |
| Net Depth [mm] | 600 | Tank power [kW] | 1.400 |
| Net Height [mm] | 820 | Water consumption of the washing cycle [l/basket] | 1,8 |
| Net Weight [kg] | 55.00 | Washing cycle time [s/basket] | 60-90-180 |
| Power electric [kW] | 7.900 | Door clear height [mm] | 465 |
| Loading | 400 V / 3N - 50 Hz | Rack size [mm] | 500 x 500 |
| Boiler capacity [l] | 6.00 | Noise of device | 59,3 |



Technical drawing

| Undercounter dishwasher double skin with drain pump 50x50 - 400 V | | |
|---|---------------------------|--|
| Model | SAP Code | 00011287 |
| NT 52 TP | A group of articles - web | Undercounter, continuous and black ware dishwasher |



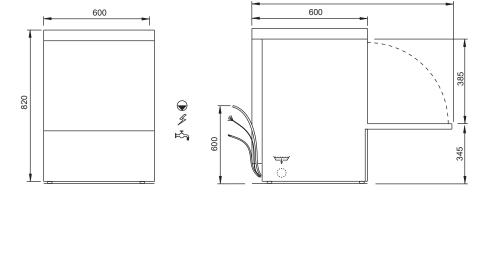





| Undercounter dishwasher double skin with drain pump 50x50 - 400 V | | |
|---|---------------------------|--|
| Model | SAP Code | 00011287 |
| NT 52 TP | A group of articles - web | Undercounter, continuous and black ware dishwasher |

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort
- LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- Detergent dispensers
 two detergent and rinse aid dispensers

two detergent and finse aid dispensers

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- The chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
 - higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

Double shell constructionstainless steel construction with insulated double jacket

- quiet operation
- energy saving

Fast heating

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

2025-10-15

3



Technical parameters

| Undercounter dishwasher double | e skin with drain pun | np 50x50 - 400 V |
|------------------------------------|---------------------------|---|
| Model | SAP Code | 00011287 |
| NT 52 TP | A group of articles - web | Undercounter, continuous and black ware dishwasher |
| 1. SAP Code: 00011287 | | 15. Number of programs: 8 |
| 2. Net Width [mm]: 600 | | 16. Opening of device: Tilting down |
| 3. Net Depth [mm]: 600 | | 17. Door clear height [mm]: 465 |
| 4. Net Height [mm]: 820 | | 18. Inlet pressure [bar]: 2-4 |
| 5. Net Weight [kg]: 55.00 | | 19. Adjustable feet: Yes |
| 6. Gross Width [mm]: 650 | | 20. Number of skin: |
| 7. Gross depth [mm]: 650 | | 21. Self-cleaning cycle: Yes |
| 8. Gross Height [mm]: 870 | | 22. Boiler capacity [l]: 6.00 |
| 9. Gross Weight [kg]: 63.00 | | 23. Boiler power [kW]: 6.000 |
| 10. Device type: Electric unit | | 24. Basin volume [l]: |
| 11. Control type: Digital | | 25. Tank power [kW]: 1.400 |
| 12. Material: Stainless steel | | 26. Number of arms for both rinsing and washing: |
| 13. Power electric [kW]: 7.900 | | 27. Arm connection: Click-clack - easy removal with one hand |
| | | |

14. Loading:

400 V / 3N - 50 Hz

28. Washing arm type:

Rotatable two-pronged



Technical parameters

| Undercounter dishwasher double | skin with drain pump | 50x50 - 400 V |
|---|---------------------------|--|
| Model | SAP Code | 00011287 |
| NT 52 TP | A group of articles - web | Undercounter, continuous and black ware dishwasher |
| 29. Washing arm material: Composite | | 41. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle |
| 30. Rinsing arm type: Rotating two-pronged | | 42. Hot water electric valve: Yes |
| 31. Rinsing arm material: Composite | | 43. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes |
| 32. Deep drawn tank: Yes | | 44. Rack size [mm]: 500 × 500 |
| 33. Rack support: Pressed | | 45. Display type: ProScreen - 4 digit display + 2 LED bars |
| 34. Tank surface strainers: composite | | 46. USB port: Yes, for Firmware actualisation |
| 35. Drain filter: ArchiMedes - double filtration with ensures only 18% loss of clean water | | 47. Drain pump: Yes |
| 36. Thermostop: Yes | | 48. Self-diagnostics: Yes |
| 37. Boiler thermostat adjust: Yes | | 49. Wash pump type: two-way - DuoFlow |
| 38. Rack feed capacity: 60-40-20 | | 50. Detergent dispenser: Yes |
| 39. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump | | 51. Rinse aid dispenser: Yes |

52. Water consumption of the washing cycle [l/basket]:

40. Energy Saving system:

boiler temperature

EnergySaving - Energy saving system due to lowering the

1,8



Technical parameters

| Undercounter dishwasher double skin with drain pump 50x50 - 400 V | | |
|---|---------------------------|--|
| Model | SAP Code | 00011287 |
| NT 52 TP | A group of articles - web | Undercounter, continuous and black ware dishwasher |
| 53. Washing cycle time [s/basket]: 60-90-180 | | 61. Program ProEco: Yes |
| 54. Rinse water temperature [°C]: | | 62. Program ProLong: Yes |
| 55. Standard equipment for device: 1x glass basket, 1x plate basket, 1x cutlery basket | | 63. Program ProGlass: Yes |
| 56. Program ProSpeed: Yes | | 64. Noise of device: 59,3 |
| 57. Program ProFessional: Yes | | 65. Cross-section of conductors CU [mm²]: 1,5 |
| 58. Program ProTemp: Yes | | 66. Water supply connection: 3/4" |
| 59. Program ProClean: Yes | | 67. Diameter nominal: DN 50 |

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

60. Program ProDrain:

Yes