

Technical data sheet

Product features



Mobile electric bain-marie GN 4-1/1 clad with controls on the shorter side

Model	SAP Code	00020165
BMPK 4120 CS	A group of articles - web	Sideboards and showcases



- Device properties: Warmed
- GN / EN size in device: GN 1/1
- GN device depth: 200
- Minimum device temperature [°C]: 30
- Maximum device temperature [°C]: 90

SAP Code	00020165	Loading	230 V / 1N - 50 Hz
Net Width [mm]	650	GN / EN size in device	GN 1/1
Net Depth [mm]	1700	GN device depth	200
Net Height [mm]	900	Minimum device temperature [°C]	30
Net Weight [kg]	100.00	Maximum device temperature [°C]	90
Power electric [kW]	2.800		


Technical data sheet

Technical drawing



Mobile electric bain-marie GN 4-1/1 clad with controls on the shorter side

Model	SAP Code	00020165
BMPK 4120 CS	A group of articles - web	Sideboards and showcases

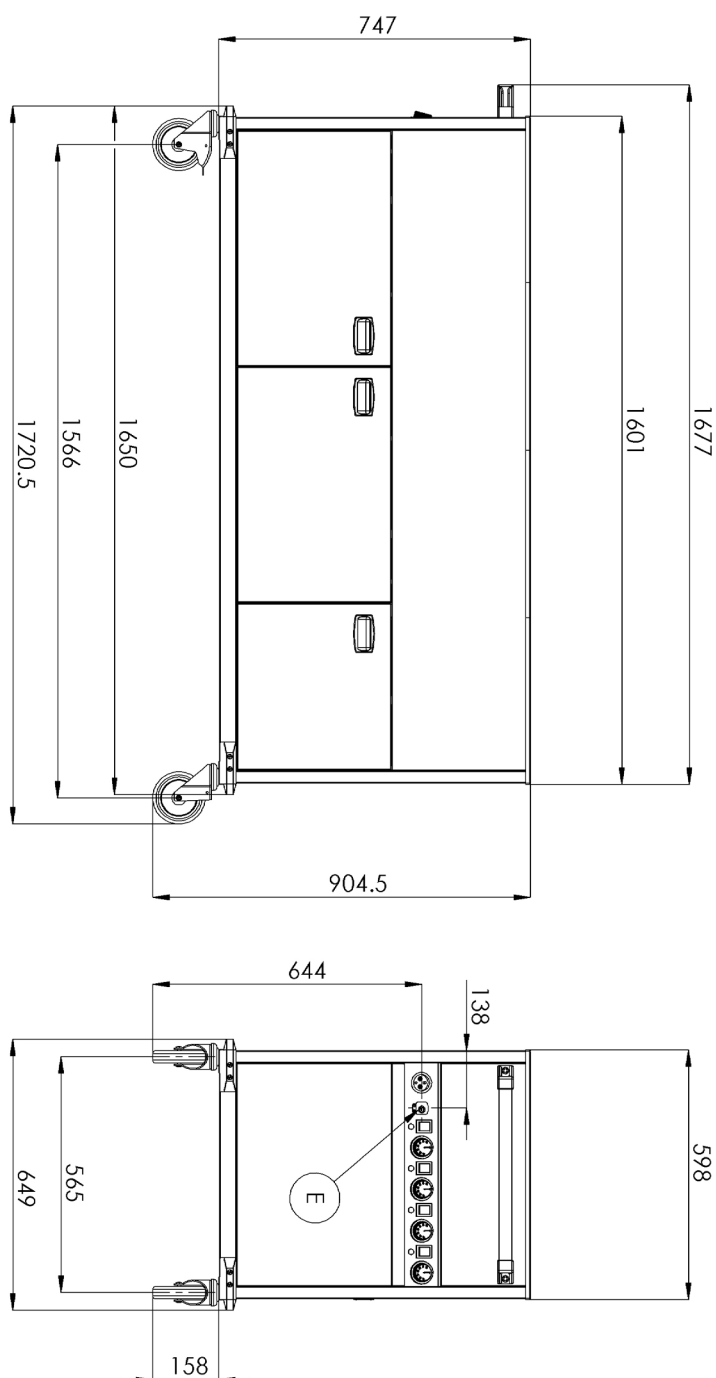

Technical data sheet

Technical parameters



Mobile electric bain-marie GN 4-1/1 clad with controls on the shorter side

Model	SAP Code	00020165
BMPK 4120 CS	A group of articles - web	Sideboards and showcases

1. SAP Code:

00020165

2. Net Width [mm]:

650

3. Net Depth [mm]:

1700

4. Net Height [mm]:

900

5. Net Weight [kg]:

100.00

6. Gross Width [mm]:

730

7. Gross depth [mm]:

1720

8. Gross Height [mm]:

920

9. Gross Weight [kg]:

110.00

10. Device type:

Electric unit

11. Material:

AISI 304 top plate, AISI 430 cladding

12. Device properties:

Warmed

13. Exterior color of the device:

Stainless steel

14. Power electric [kW]:

2.800

15. Loading:

230 V / 1N - 50 Hz

16. GN / EN size in device:

GN 1/1

17. GN device depth:

200

18. Minimum device temperature [°C]:

30

19. Maximum device temperature [°C]:

90

20. Cross-section of conductors CU [mm²]:

0,75