



Undercounter dishwasher double skin with drain pump 40x40 - 230 V		
Model	SAP Code	00011285
NT 42 P	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: ProScreen 4 digit display + 2 LED bars
- Number of programs: 6
- Number of skin: 2
- Door clear height [mm]: 320
- Rack size [mm]: 400 x 400
- Water consumption of the washing cycle [l/basket]: 1,9
- Washing cycle time [s/basket]: 90-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011285	Boiler power [kW]	2.600
Net Width [mm]	466	Basin volume [l]	8
Net Depth [mm]	556	Tank power [kW]	0.600
Net Height [mm]	695	Water consumption of the washing cycle [l/basket]	1,9
Net Weight [kg]	46.00	Washing cycle time [s/basket]	90-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400
Boiler capacity [ l ]	2.60	Noise of device	54,3




Technical drawing

Undercounter dishwasher double skin with drain pump 40x40 - 230 V		
Model	SAP Code	00011285
NT 42 P	A group of articles - web	Undercounter, continuous and black ware dishwasher





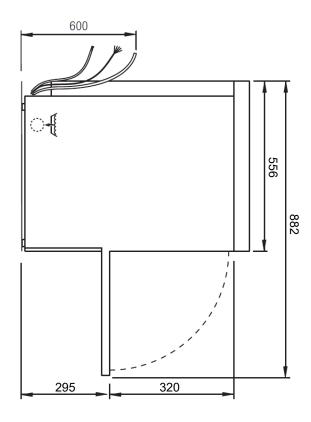





Undercounter dishwasher double skin with drain pump 40x40 - 230 V		
Model	SAP Code	00011285
NT 42 P	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort
- **LED Display**

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- **Double pump**

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- **Molded basket supports**

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

**Double filter system** 

**Detergent dispensers** 

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
  - higher washing efficiency; longer life of the washing bath

**Energy saving** 

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

**Protection of fragile dishes** 

softstart system for gradual start of washing programs to protect fragile dishes

protects stemmed glasses and other fragile utensils

**Double shell construction** stainless steel construction with insulated double jacket

- quiet operation
- energy saving

**Fast heating** 

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

2025-11-07



#### Technical parameters

Undercounter dishwasher double skin with drain pump 40x40 - 230 V		
Model	SAP Code	00011285
NT 42 P	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>1. SAP Code:</b> 00011285		<b>15. Number of programs:</b> 6
<b>2. Net Width [mm]:</b> 466		<b>16. Opening of device:</b> Tilting down
3. Net Depth [mm]: 556		17. Door clear height [mm]: 320
4. Net Height [mm]: 695		<b>18. Inlet pressure [bar]:</b> 2-4
5. Net Weight [kg]: 46.00		<b>19. Adjustable feet:</b> Yes
6. Gross Width [mm]: 516		20. Number of skin:
7. Gross depth [mm]: 606		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 745		22. Boiler capacity [l]: 2.60
<b>9. Gross Weight [kg]:</b> 49.00		23. Boiler power [kW]: 2.600
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 0.600
12. Material: Stainless steel		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 3.500		27. Arm connection:  Click-clack - easy removal with one hand

14. Loading:

230 V / 1N - 50 Hz

28. Washing arm type:

Rotatable two-pronged



#### Technical parameters

Undercounter dishwasher double	skin with drain pump	o 40x40 - 230 V
Model	SAP Code	00011285
NT 42 P	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>29. Washing arm material:</b> Composite		<b>41. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
30. Rinsing arm type: Rotating two-pronged		<b>42. Hot water electric valve:</b> Yes
31. Rinsing arm material: Composite		<b>43. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
<b>32. Deep drawn tank:</b> Yes		<b>44. Rack size [mm]:</b> 400 × 400
33. Rack support: Pressed		<b>45. Display type:</b> ProScreen - 4 digit display + 2 LED bars
34. Tank surface strainers: composite		<b>46. USB port:</b> Yes, for Firmware actualisation
<b>35. Drain filter:</b> ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste		<b>47. Drain pump:</b> Yes
<b>36. Thermostop:</b> Yes		<b>48. Self-diagnostics:</b> Yes
<b>37. Boiler thermostat adjust:</b> Yes		<b>49. Wash pump type:</b> two-way - DuoFlow
38. Rack feed capacity: 24-30-40		<b>50. Detergent dispenser:</b> Yes
<b>39. Detergent and rinse pump system:</b> ProDose - accurate dosing with a peristaltic pump		<b>51. Rinse aid dispenser:</b> Yes

**52.** Water consumption of the washing cycle [l/basket]:

**40. Energy Saving system:** 

boiler temperature

EnergySaving - Energy saving system due to lowering the

1,9



#### Technical parameters

59. Program ProClean:

Yes

Undercounter dishwasher double skin with drain pump 40x40 - 230 V		
Model	SAP Code	00011285
NT 42 P	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>53. Washing cycle time [s/basket]:</b> 90-120-150		60. Program ProDrain: Yes
54. Rinse water temperature [°C]: 65		61. Program ProPlates: Yes
<b>55. Standard equipment for device:</b> 1x glass basket, 1x cutlery basket		<b>62. Noise of device:</b> 54,3
56. Program ProSpeed: Yes		63. Cross-section of conductors CU [mm²]:
<b>57. Program ProFessional:</b> Yes		<b>64. Water supply connection:</b> 3/4"
<b>58. Program ProTemp:</b> Yes		<b>65. Diameter nominal:</b> DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com