



| Convection oven STEAMBOX electric 6x GN 1/1 Automatic cleaning boiler 400V Left-hinged door 10" display | | |
|---|---------------------------|---------------------|
| Model | SAP Code | 00038545 |
| STMB 0611 EL | A group of articles - web | Convection machines |




- Number of GN / EN: 6
- GN / EN size in device: GN 1/1
- GN device depth: 65
- Control type: Touchscreen
- Display size: 10"
- Humidity control: MeteoSystem regulation based on direct measurement of humidity in the chamber (patented)
- Advanced moisture adjustment: Steamtuner 5-stage system of setting steam saturation by controlled combination of production by boiler or injection
- Delta T heat preparation: Yes
- Automatic preheating: Yes
- Multi level cooking: Drawer program control of heat treatment for each dish separately
- Door constitution: Odvětrávané bezpečnostní trojité sklo, rozebiratelné pro snadné čištění


| SAP Code | 00038545 | Loading | 400 V / 3N - 50 Hz |
|---------------------|----------|------------------------|--------------------|
| Net Width [mm] | 890 | Number of GN / EN | 6 |
| Net Depth [mm] | 795 | GN / EN size in device | GN 1/1 |
| Net Height [mm] | 835 | GN device depth | 65 |
| Net Weight [kg] | 107.00 | Control type | Touchscreen |
| Power electric [kW] | 11.400 | Display size | 10" |





Technical drawing

Convection oven STEAMBOX electric 6x GN 1/1 Automatic cleaning boiler 400V Left-hinged door 10" display Model SAP Code 00038545 STMB 0611 EL A group of articles - web Convection machines

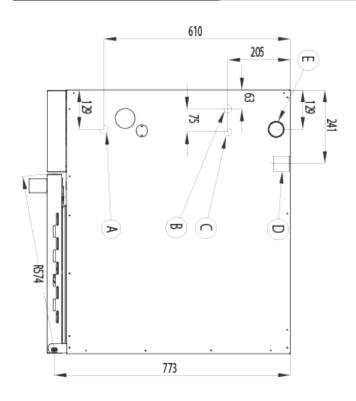

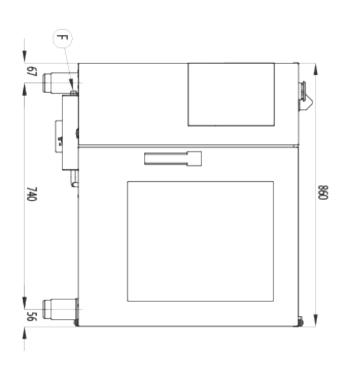

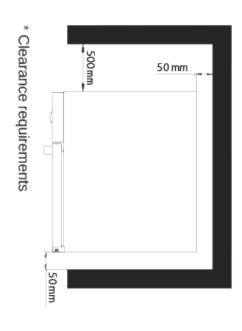

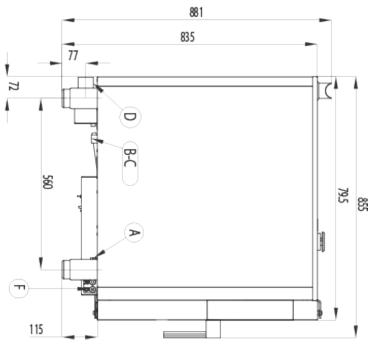





| Convection oven STEAMBOX electric 6x GN 1/1 Automatic cleaning boiler 400V Left-hinged door 10" display | | |
|---|---------------------------|---------------------|
| Model | SAP Code | 00038545 |
| STMB 0611 EL | A group of articles - web | Convection machines |

Triple glass door as standard

better thermal insulation, less frequent reheating, safer operation due to lower outer glass temperature, less radiant heat, less heat leakage, lower load on electronics and mechanical parts

Clear 10" touch screen corresponding to other RM line devices

simple intuitive operation using images and visualizations, the same intuitive operation as on other digital devices in the RM line

Smart cooking

Predefined basic programs for easy control with just a few touches

Symbiotic steam generation system

simultaneous use of "direct injection" and boiler, maintaining 100% humidity, or its regulation

Self-winding shower

vacuum probe

drum reel integrated in the combi oven body the shower is inaccessible after closing the door

Fan six-speed, reversible with automatic calculation of direction change

in cooperation with the symbiotic system, it ensures perfect distribution of steam without loss of its saturation, its operation is controlled by program or manually

temperature probe placed outside the cooking space option to choose from a single or multi-point probe or

Longitudinal drawers for GN

drawers placed at the "depth" of the machine option to replace with drawers for 600x400 trays

USB

downloading service reports upgrade software playback recipes

Automatic washing

integrated chamber washing system option to use liquid and tablet detergents option to use vinegar as a rinse aid the system also descales the micro-boiler

Meteo system

patented device for measuring steam saturation in real time and in steam mode, the only one on the market

Kit of two machines on top of each other

interconnection kit allowing two machines to be stacked on top of each other

interconnects connections, inlets, wastes and ventilation of the lower combi oven

Adjustment for roasting chicken

The combi oven chamber is designed to collect baked-on fat, the machine is equipped with a fat collection container



Technical parameters

| Convection oven STEAMBOX ele | ectric 6x GN 1/1 Autom | atic cleaning boiler 400V Left-hinged door 10" display |
|--|---------------------------|---|
| Model | SAP Code | 00038545 |
| STMB 0611 EL | A group of articles - web | Convection machines |
| 1. SAP Code: 00038545 | | 15. Adjustable feet: Yes |
| 2. Net Width [mm]: 890 | | 16. Humidity control: MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented) |
| 3. Net Depth [mm]: 795 | | 17. Stacking availability: Yes |
| 4. Net Height [mm]: 835 | | 18. Control type: Touchscreen |
| 5. Net Weight [kg]: 107.00 | | 19. Additional information: Verze s levými dveřmi (panty vlevo, klika vpravo) |
| 6. Gross Width [mm]: 955 | | 20. Chimney for moisture extraction: Yes |
| 7. Gross depth [mm]: 920 | | 21. Delayed start: Yes |
| 8. Gross Height [mm]: | | 22. Display size: |
| 9. Gross Weight [kg]: 128.00 | | 23. Delta T heat preparation: Yes |
| 10. Device type: Electric unit | | 24. Automatic preheating: Yes |
| 11. Power electric [kW]: 11.400 | | 25. Automatic cooling: Yes |
| 12. Loading: 400 V / 3N - 50 Hz | | 26. Cold smoke-dry function: Yes |
| 13. Material: AISI 304 | | 27. Unified finishing of meals EasyService: Yes |
| 14. Exterior color of the device: | | 28. Night cooking: |

Stainless steel

Yes



Technical parameters

| Convection oven STEAMBOX elec | tric 6x GN 1/1 Automatic | cleaning boiler 400V Left-hinged door 10" display |
|---|------------------------------|---|
| Model | SAP Code | 00038545 |
| STMB 0611 EL | A group of articles - web | Convection machines |
| 29. Washing system: Closed - efficient use of water and repeated pumping | washing chemicals by | 41. Shower: Hand winder |
| 30. Detergent type: Liquid washing detergent + liquid rinse aid/vinegar or washing tablets | | 42. Smoke-dry function: Yes |
| 31. Multi level cooking: Drawer program - control of heat treatment for each dish separately | | 43. Interior lighting: Yes |
| 32. Advanced moisture adjustment: Steamtuner - 5-stage system of setting steam saturation by controlled combination of production by boiler or injection | | 44. Low temperature heat treatment: Yes |
| 33. Slow cooking: from 30 °C - the possibility of rising | | 45. Number of fans: |
| 34. Fan stop: Immediate when the door is opened | | 46. Number of fan speeds: 9 |
| 35. Lighting type: LED lighting in the doors, on both sides | | 47. Number of programs: 1000 |
| 36. Cavity material and shape: AISI 304, with rounded corners for easy cleaning | | 48. USB port: Yes, for uploading recipes and updating firmware |
| 37. Reversible fan: Yes | | 49. Door constitution: Odvětrávané bezpečnostní trojité sklo, rozebiratelné pro snadné čištění |
| 38. Sustaince box: Yes | | 50. Number of preset programs: 100 |
| 39. Heating element material: Incoloy | | 51. Number of recipe steps: |
| 40. Probe: Ano | | 52. Minimum device temperature [°C]: 30 |



Technical parameters

| Convection oven STEAMBOX electric 6x GN 1/1 Automatic cleaning boiler 400V Left-hinged door 10" display | | |
|---|---------------------------|---|
| Model | SAP Code | 00038545 |
| STMB 0611 EL | A group of articles - web | Convection machines |
| 53. Maximum device temperature [°C]: 300 | | 58. GN device depth: 65 |
| 54. Device heating type: Combination of steam and hot air | | 59. Food regeneration: Yes |
| 55. HACCP: Yes | | 60. Cross-section of conductors CU [mm²]: |
| 56. Number of GN / EN: | | 61. Diameter nominal: DN 50 |
| 57. GN / EN size in device: GN $1/1$ | | 62. Water supply connection: 3/4" |

e-mail: rmgastro@rmgastro.com web: www.rmgastro.com