Technical data sheet

Product features

Rack conveyor dishwasher 270 racks/hour, cold-water version, left-hand outlet, drying module. 400 V / 3N		
Model	**SAP Code**	00039977
A 270 ABT LX M W L Y	**A group of articles - web**	Tunel dishwashers



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD ProSmart soft touch
- Number of programs: 4
- Number of skin: 2
- Maximal rack feed [racks/h]: 270
- Door clear height [mm]: 450
- Rack size [mm]: 500x500
- Water consumption of the washing cycle [l/basket]: 0,8-1,1
- Washing cycle time [s/basket]: 13-25
- Detergent and rinse pump system: Accurate dosing with a peristaltic pump
- Wash pump type: DuoFlow
- Detergent dispenser: Yes
- Rinse aid dispenser: Yes

SAP Code	00039977	**Boiler power [kW]**	22.000
Net Width [mm]	3419	**Basin volume [l]**	70
Net Depth [mm]	813	**Tank power [kW]**	10.500
Net Height [mm]	1615	**Water consumption of the washing cycle [l/basket]**	0,8-1,1
Net Weight [kg]	490.00	**Washing cycle time [s/basket]**	13-25
Power electric [kW]	37.700	**Maximal rack feed [racks/h]**	270
Loading	400 V / 3N - 50 Hz	**Door clear height [mm]**	450
Boiler capacity [l]	17.00	**Rack size [mm]**	500x500


RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical drawing

Rack conveyor dishwasher 270 racks/hour, cold-water version, left-hand outlet, drying module. 400 V / 3N

Model	SAP Code	00039977
A 270 ABT LX M W L Y	A group of articles - web	Tunel dishwashers

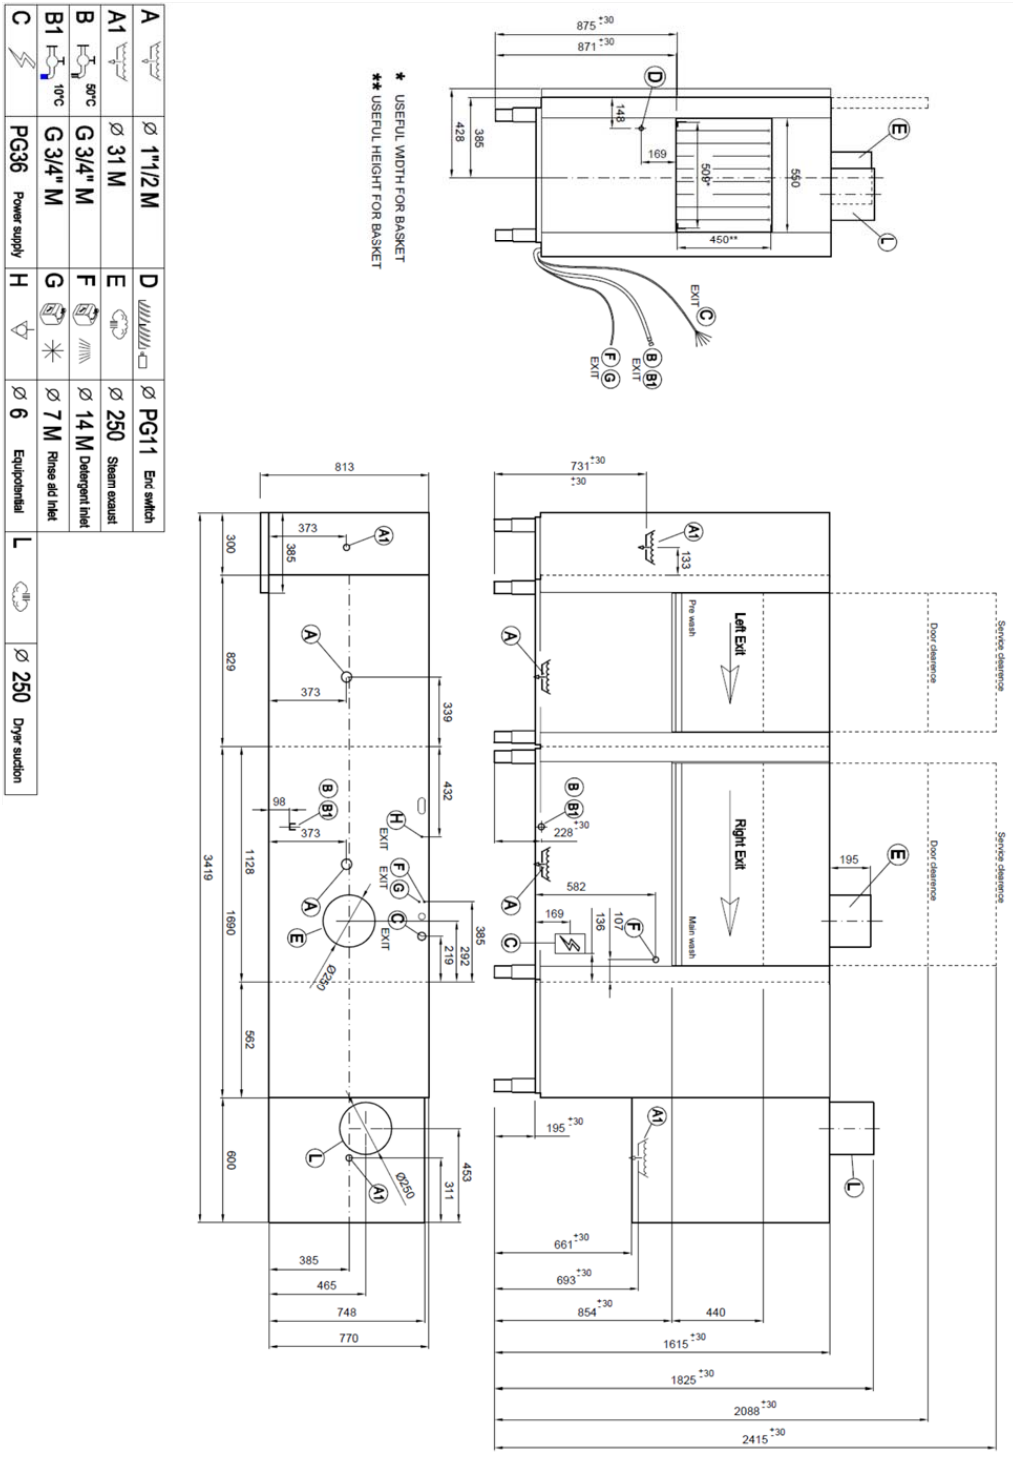

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Rack conveyor dishwasher 270 racks/hour, cold-water version, left-hand outlet, drying module. 400 V / 3N

Model	SAP Code	00039977
A 270 ABT LX M W L Y	A group of articles - web	Tunel dishwashers

1. **SAP Code:**
   00039977
2. **Net Width [mm]:**
   3419
3. **Net Depth [mm]:**
   813
4. **Net Height [mm]:**
   1615
5. **Net Weight [kg]:**
   490.00
6. **Gross Width [mm]:**
   3800
7. **Gross depth [mm]:**
   920
8. **Gross Height [mm]:**
   1850
9. **Gross Weight [kg]:**
   500.00
10. **Device type:**
    Electric unit
11. **Control type:**
    Digital
12. **Material:**
    AISI 304
13. **Power electric [kW]:**
    37.700
14. **Loading:**
    400 V / 3N - 50 Hz
15. **Rack size [mm]:**
    500x500
16. **Number of programs:**
    4
17. **Opening of device:**
    Retractable up
18. **Door clear height [mm]:**
    450
19. **Inlet pressure [bar]:**
    2-4
20. **Adjustable feet:**
    Yes
21. **Number of skin:**
    2
22. **Modular construction:**
    Yes
23. **Pre-wash module:**
    Yes
24. **Maximal rack feed [racks/h]:**
    270
25. **Boiler capacity [l]:**
    17.00
26. **Boiler power [kW]:**
    22.000
27. **Basin volume [l]:**
    70
28. **Tank power [kW]:**
    10.500

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Rack conveyor dishwasher 270 racks/hour, cold-water version, left-hand outlet, drying module. 400 V / 3N

Model	SAP Code	00039977
A 270 ABT LX M W L Y	A group of articles - web	Tunel dishwashers

29. Number of washing arms:
5

30. Number of rinsing arms:
6

31. Washing arm type:
Firm

32. Washing arm material:
Stainless steel

33. Atmospheric boiler with rinse pump:
Yes

34. Rinsing arm type:
Firm

35. Rinsing arm material:
Stainless steel

36. Deep drawn tank:
Yes

37. Rack support:
welded

38. Tank surface strainers:
stainless steel

39. Boiler thermostat adjust:
Yes

40. Rack feed capacity:
140-200-270

41. Detergent and rinse pump system:
Accurate dosing with a peristaltic pump

42. Hot water electric valve:
Yes

43. Min supply water temperature [°C]:
10

44. Max supply water temperature [°C]:
40

45. Display type:
LCD ProSmart soft touch

46. USB port:
Yes, for Firmware actualisation

47. Self-diagnostics:
Yes

48. Double rinse:
Yes

49. Wash pump type:
DuoFlow

50. Detergent dispenser:
Yes

51. Rinse aid dispenser:
Yes

52. Water consumption of the washing cycle [l/basket]:
0,8-1,1

53. Washing cycle time [s/basket]:
13-25

54. Rinse water temperature [°C]:
82

55. Standard equipment for device:
1x koš na sklo, 1x koš na talíře, 1x koš na příbory

56. Program ProSpeed:
No

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Rack conveyor dishwasher 270 racks/hour, cold-water version, left-hand outlet, drying module. 400 V / 3N

Model	SAP Code	00039977
A 270 ABT LX M W L Y	A group of articles - web	Tunel dishwashers

57. Program ProFessional:
No

58. Program ProFessional 2:
No

59. Program ProFessional 4:
No

60. Program ProFessional 6:
No

61. Program ProFessional 8:
No

62. Program ProFessional 10:
No

63. Program ProTemp:
No

64. Program ProSelf:
No

65. Program ProClean:
No

66. Program ProDrain:
No

67. Program ProEco:
No

68. Program ProNew:
No

69. Program ProLong:
No

70. Program ProGlass:
No

71. Program ProPlates:
No

72. Program ProCold:
No

73. Program ProWater:
No

74. Program ProActive:
No

75. Program ProActive 5:
No

76. Program ProActive 7:
No

77. Program ProSteel:
No

78. Program ProSan:
No

79. Program High Capacity:
Yes

80. Program General purpose:
Yes

81. Program Prolonged contact (DIN 10534):
Yes

82. Program Glasses:
Yes

83. Cross-section of conductors CU [mm²]:
16

84. Water supply connection:
3/4”

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Rack conveyor dishwasher 270 racks/hour, cold-water version, left-hand outlet, drying module. 400 V / 3N		
Model	**SAP Code**	00039977
A 270 ABT LX M W L Y	**A group of articles - web**	Tunel dishwashers

85. Diameter nominal:
DN 50

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062