



Hood type dishwasher double skin heat recovery system 50x50 - 400 V		
Model	SAP Code	00011295
TT 112 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 13
- Number of skin: 2
- Door clear height [mm]: 465
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,2
- Washing cycle time [s/basket]: 60-90-180
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

SAP Code	00011295	Boiler power [kW]	7.000
Net Width [mm]	721	Basin volume [l]	22
Net Depth [mm]	836	Tank power [kW]	2.500
Net Height [mm]	2265	Water consumption of the washing cycle [l/basket]	2,2
Net Weight [kg]	111.00	Washing cycle time [s/basket]	60-90-180
Power electric [kW]	10.200	Door clear height [mm]	465
Loading	400 V / 3N - 50 Hz	Rack size [mm]	500 x 500
Boiler capacity [l]	12.00		



Technical drawing

Hood type dishwasher double skin heat recovery system 50x50 - 400 V		
Model	SAP Code	00011295
TT 112 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

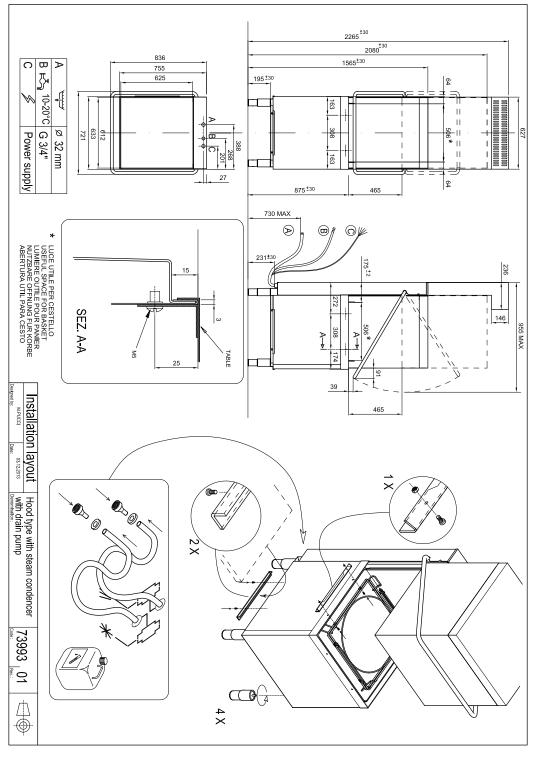





Hood type dishwasher double skin heat recovery system 50x50 - 400 V		
Model	SAP Code	00011295
TT 112 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

1

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- 2

Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning
- increased user comfort

3

LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- 5

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

6

Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel 7

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath
- 8

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

9

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- 10

Double shell construction

stainless steel construction with insulated double jacket

- quiet operation
- energy saving
- 11

Fast heating

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation
- 12

Possibility of recovery

saving up to 40% of boiler energy improves the comfort environment of the workplace environment without steam saves water

 saving on energy and water costs; environmentally friendly system; safe system; pleasant workplace



Technical parameters

Hood type dishwasher double skin heat recovery system 50x50 - 400 V		
Model	SAP Code	00011295
TT 112 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011295		15. Number of programs: 13
2. Net Width [mm]: 721		16. Opening of device: Flip up
3. Net Depth [mm]: 836		17. Door clear height [mm]: 465
4. Net Height [mm]: 2265		18. Inlet pressure [bar]: 2-4
5. Net Weight [kg]: 111.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 870		20. Number of skin:
7. Gross depth [mm]: 760		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2314		22. Boiler capacity [l]: 12.00
9. Gross Weight [kg]: 121.00		23. Boiler power [kW]: 7.000
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 2.500
12. Material: Stainless steel		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 10.200		27. Arm connection: Hand loosen/tighten screw

14. Loading:

400 V / 3N - 50 Hz

28. Washing arm type:

Rotatable two-pronged



Technical parameters

Hood type dishwasher double skin heat recovery system 50x50 - 400 V		
Model	SAP Code	00011295
TT 112 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Washing arm material: Stainless steel		39. Rack feed capacity: 60-40-20
30. Atmospheric boiler with rinse pump: Yes		40. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
31. Rinsing arm type: Rotating two-pronged		41. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature
32. Rinsing arm material: Stainless steel		42. Rinse system: UltraRinse2 - stainless steel rinsing arms including stainless steel nozzles with a geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure
33. Deep drawn tank: Yes		43. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
34. Rack support: Pressed		44. Quick heating system: QuickReady - System for rapid heating of water in the tank
35. Tank surface strainers: stainless steel		45. Lift system: ProGlide - Required lifting force equals 3 kg thanks to counterweights and gentle guidance, reduces operator fatigue
36. Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		46. Heat recovery: 1 copper-aluminum battery - saving up to 40% of the energy needed to heat the water in the boiler, at the same time, by absorbing the released steam, it eliminates the need to use a hood
37. Thermostop:		47. Hot water electric valve:

Yes

Yes

38. Boiler thermostat adjust:

Yes

48. Closing door system:

could cause damage to dishes

ProSoft - Reduces noise, dampens the door stop, which



Technical parameters

Hood type dishwasher double skin heat recovery system 50x50 - 400 V		
Model	SAP Code	00011295
TT 112 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
49. Rack size [mm]: 500 × 500		63. Program ProFessional: Yes
50. Display type: LCD multifunction display		64. Program ProTemp: Yes
51. Location of control panel: On the top		65. Program ProClean: Yes
52. USB port: Yes, for Firmware actualisation		66. Program ProDrain: Yes
53. Drain pump: Yes		67. Program ProEco: Yes
54. Self-diagnostics: Yes		68. Program ProNew: Yes
55. Wash pump type: two-way - DuoFlow		69. Program ProLong: Yes
56. Detergent dispenser: Yes		70. Program ProGlass: Yes
57. Rinse aid dispenser: Yes		71. Program ProWater: Yes
58. Water consumption of the washing cycle [l/basket]: 2,2		72. Program ProActive: Yes
59. Washing cycle time [s/basket]: 60-90-180		73. Program ProSteel: Yes
60. Rinse water temperature [°C]:		74. Program ProSan: Yes
61. Standard equipment for device: 1x glass basket, 1x plate basket, 1x c	utlery basket	75. Cross-section of conductors CU [mm²]: 2,5

Yes

62. Program ProSpeed:

3/4"

76. Water supply connection:



Technical parameters

Hood type dishwasher double skin heat recovery system 50x50 - 400 V		
Model	SAP Code	00011295
TT 112 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

77. Diameter nominal:

DN 50