Technical data sheet

Product features



Model	SAP Code	00008521	
STBB 1011 E	A group of articles - web	Convection machines	
		 Steam type: Symbiotic - boiler and injection combination (patent) Number of GN / EN: 10 GN / EN size in device: GN 1/1 GN device depth: 65 Control type: Touchscreen + buttons Display size: 9" Humidity control: MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented) Advanced moisture adjustment: Steamtuner - 5-stage system of setting steam saturation by controlled combination of production by boiler or injection Delta T heat preparation: Yes Automatic preheating: Yes Multi level cooking: Drawer program - control of heat treatment for each dish separately Door constitution: Vented safety double glass, removable for easy cleaning 	
SAP Code	00008521	Steam type	Symbiotic - boiler and injection combina- tion (patent)
Net Width [mm]	860	Number of GN / EN	10
Net Depth [mm]	795	GN / EN size in device	GN 1/1
Net Height [mm]	1115	GN device depth	65
Net Weight [kg]	168.00	Control type	Touchscreen + buttons
Power electric [kW]	16.500	Display size	9"


Combi convection steam oven STEAMBOX electric 10x GN 1/1 automatic cleaning boiler 400 V

Loading

400 V / 3N - 50 Hz

Technical drawing



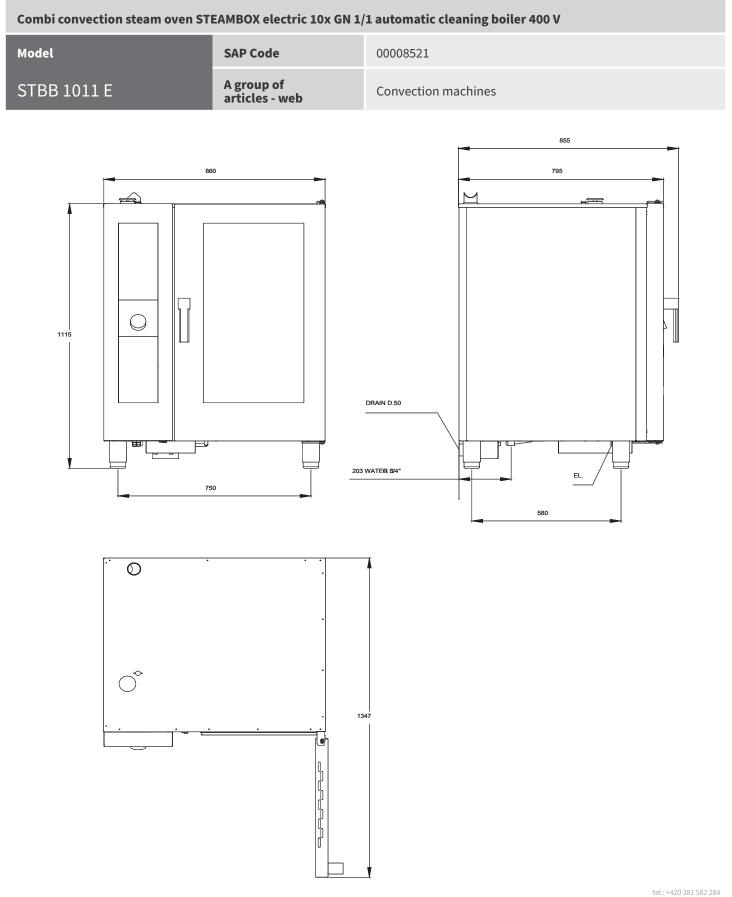

Technical data sheet

Product benefits



del		SAP Code	00008521	
STBB 1011 E		A group of articles - web	Convection machines	
1	the only Slim type combi	ct injection and boiler, midity, possibly its regulation oven on the market with a boiler	8	Premix burner the only burner with a turbo pre -mixing gas with air on the market the structure of the burner to V which prevents backfill and banging This design saves 30 % of gas compared to conventional burners
2	Touch screen display simple intuitive control w all in Czech the possibility of using pr		9	Automatic washing integrated chamber washing system possibility to use liquid and tablet detergents
3		uring steam saturation in real the only one on the market	option to use vinegar as a rinse agent the system simultaneously descales the micro-boiler	
4	Steam tuner a control element that en saturation of steam in the cooking process	ables setting the exact cooking chamber during the	10	Self -supporting shower drum winch integrated in the body of the kettle the shower is inaccessible when the door is closed
5	Pass-through door the door is also built into	the back of the combi oven, ed from the side of the cook of the delivery area	11	Six-speed fan, reversible with automatic calculation of direction change in cooperation with the symbiotic system, it ensures perfect steam distribution without losing its richness its operation is controlled by the program or manually
6		ing chickens ection oven is designed to collect equipped with a container for	12 13	External temperature probe temperature probe located outside the cooking area choice of single or multipoint probe or vacuum probe Longitudinal insertion to GN penetration placed on the "depth" of the machine
7	connection kit allowing tw top of each other	s on top of each other wo machines to be placed on s, inlets, wastes and ventilation	14	exchangeable for 600x400 sheet metal inserts USB downloading service reports software upgrade



Combi convection steam oven ST	EAMBOX electric 10x	GN 1/1 automatic cleaning boiler 400 V		
Model	SAP Code	00008521		
STBB 1011 E	A group of articles - web	Convection machines		
1. SAP Code: 00008521		14. Exterior color of the device: Stainless steel		
2. Net Width [mm]: 860		15. Adjustable feet: Yes		
3. Net Depth [mm]: 795		16. Humidity control: MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented)		
4. Net Height [mm]: 1115		17. Stacking availability: Yes		
5. Net Weight [kg]: 168.00		18. Control type: Touchscreen + buttons		
6. Gross Width [mm]: 955		19. Additional information: possibility of reverse door opening - handle on the right side (must be specified when ordering)		
7. Gross depth [mm]: 920		20. Steam type: Symbiotic - boiler and injection combination (patent)		
8. Gross Height [mm]: 1240		21. Chimney for moisture extraction: Yes		
9. Gross Weight [kg]: 178.00		22. Delayed start: Yes		
10. Device type: Electric unit		23. Display size: 9"		
11. Power electric [kW]: 16.500		24. Delta T heat preparation: Yes		
12. Loading: 400 V / 3N - 50 Hz		25. Automatic preheating: Yes		
13. Material: AISI 304		26. Automatic cooling: Yes		



Combi convection steam oven ST	EAMBOX electric 10x GN	1/1 automatic cleaning boiler 400 V	
Model	SAP Code	00008521	
STBB 1011 E	A group of articles - web	Convection machines	
27. Cold smoke-dry function: Yes		40. Heating element material: Incoloy	
28. Unified finishing of meals EasyService: Yes		41. Probe: Yes	
29. Night cooking: Yes		42. Shower: Manual (optional)	
30. Washing system: Closed - efficient use of water and repeated pumping	washing chemicals by	43. Distance between the layers [mm]: 70	
31. Detergent type: Liquid washing detergent + liquid rinse aid/vinegar or washing tablets		44. Smoke-dry function: Yes	
32. Multi level cooking: Drawer program - control of heat treatment for each dish separately		45. Interior lighting: Yes	
33. Advanced moisture adjustment: Steamtuner - 5-stage system of setting steam saturation by controlled combination of production by boiler or injection		46. Low temperature heat treatment: Yes	
34. Slow cooking: from 30 °C - the possibility of rising		47. Number of fans:	
35. Fan stop: Immediate when the door is opened		48. Number of fan speeds: 6	
6. Lighting type: LED lighting in the doors, on both sides		49. Number of programs: 1000	
7. Cavity material and shape: AISI 304, with rounded corners for easy cleaning		50. USB port: Yes, for uploading recipes and updating firmware	
8. Reversible fan: Yes		51. Door constitution: Vented safety double glass, removable for easy cleaning	
39. Sustaince box: Yes		52. Number of preset programs: 100	

Technical parameters



Combi convection steam oven STEAMBOX electric 10x GN 1/1 automatic cleaning boiler 400 V			
Model	SAP Code	00008521	
STBB 1011 E	A group of articles - web	Convection machines	
53. Number of recipe steps: 9		59. GN / EN size in device: GN 1/1	
54. Minimum device temperature [°C]: 30		60. GN device depth: 65	
55. Maximum device temperature [°C]: 300		61. Food regeneration: Yes	
56. Device heating type: Combination of steam and hot air		62. Cross-section of conductors CU [mm²]:	
57. HACCP: Yes		63. Diameter nominal: DN 50	
58. Number of GN / EN: 10		64. Water supply connection: 3/4"	