

Technical data sheet

Product features



Electric range with hot air oven

Model	SAP Code	00014791
SPLT 780/11 E	A group of articles - web	Stoves



- Device type: Electric unit
- Power consumption of the zone 1 [kW]: 2,5
- Power consumption of the zone 2 [kW]: 2,5
- Power consumption of the zone 3 [kW]: 2,5
- Power consumption of the zone 4 [kW]: 2,5
- Type of internal part of the appliance 1 (eg oven): Electric
- Type of internal part of the appliance 2 (eg oven): Hot air
- Protection of controls: IP24
- Material: AISI 304 top plate and cladding

SAP Code	00014791	Number of zones	4
Net Width [mm]	800	Power consumption of the zone 1 [kW]	2,5
Net Depth [mm]	730	Power consumption of the zone 2 [kW]	2,5
Net Height [mm]	900	Power consumption of the zone 3 [kW]	2,5
Net Weight [kg]	122.90	Power consumption of the zone 4 [kW]	2,5
Power electric [kW]	13.130	Type of internal part of the appliance 1 (eg oven)	Electric
Loading	400 V / 3N - 50 Hz	Type of internal part of the appliance 2 (eg oven)	Hot air




Technical data sheet

Technical drawing



Electric range with hot air oven

Model	SAP Code	00014791
SPLT 780/11 E	A group of articles - web	Stoves

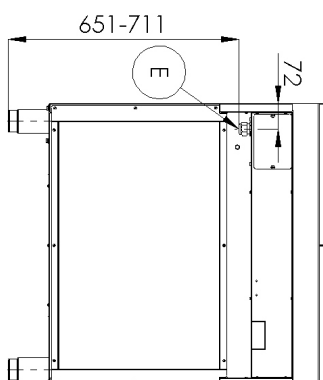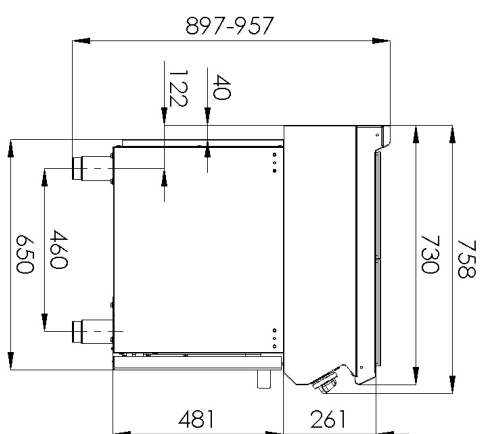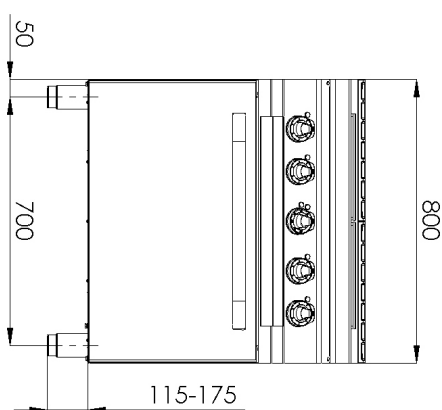

Technical data sheet

Product benefits



Electric range with hot air oven

Model	SAP Code	00014791
SPLT 780/11 E	A group of articles - web	Stoves

1

Square

heat

Effective cooking on a large neighborhood

- saving time when preparing meals
- Easy to operate thanks to a large area

2

Internal thermostatic protection of the hob

a longer life of the hob

3

Degree of protection of controls IPX4

maintenance -free

water resistance

long life

- Savings on service interventions
- easy cleaning of the device

4

Nationheres

long life

Cut -made steel of 10 mm thick boards

- Savings on service interventions
- higher corrosion resistance

5

Hygienic embossments of the top plate

absence of sharp corners and edges (potential places where dirt could adhere)

smooth transitions

- Simple fast cleaning

6

A hot air oven with four positions of grate

hot -air baking

high capacity and variability

nationheres

- Suitable for meat, fish, baked pasta, white meat, sweet pastry
- long life
- simple cleaning

Technical data sheet

Technical parameters



Electric range with hot air oven

Model	SAP Code	00014791
SPLT 780/11 E	A group of articles - web	Stoves

1. SAP Code:

00014791

2. Net Width [mm]:

800

3. Net Depth [mm]:

730

4. Net Height [mm]:

900

5. Net Weight [kg]:

122.90

6. Gross Width [mm]:

840

7. Gross depth [mm]:

800

8. Gross Height [mm]:

1080

9. Gross Weight [kg]:

132.00

10. Device type:

Electric unit

11. Construction type of device:

Stationary

12. Power electric [kW]:

13.130

13. Loading:

400 V / 3N - 50 Hz

14. Protection of controls:

IP24

15. Exterior color of the device:

Stainless steel

16. Material:

AISI 304 top plate and cladding

17. Indicators:

operation

18. Worktop type:

Molded - comfortable cleaning maintenance

19. Worktop material:

AISI 304

20. Worktop Thickness [mm]:

1.50

21. Number of zones:

4

22. Power consumption of the zone 1 [kW]:

2,5

23. Power consumption of the zone 2 [kW]:

2,5

24. Power consumption of the zone 3 [kW]:

2,5

25. Power consumption of the zone 4 [kW]:

2,5

26. Maximum device temperature [°C]:

400

27. Minimum device temperature [°C]:

50

28. Number of power control stages:

6

Technical data sheet

Technical parameters



Electric range with hot air oven

Model	SAP Code	00014791
SPLT 780/11 E	A group of articles - web	Stoves

29. Service accessibility:

Trough the frontal panel

30. Adjustable feet:

Yes

31. Number of burners/hot plates:

4

32. Type of electric cooking zones:

Squared

33. Oven Type:

electric hot air

34. Oven power electric [kW]:

3.13

35. Oven size:

GN 1/1

36. Type of internal part of the appliance 1 (eg oven):

Electric

37. Type of internal part of the appliance 2 (eg oven):

Hot air

38. Gasket:

Yes

39. Maximum temperature of the inner chamber [°C]:

300

40. Minimum temperature of the inner chamber [°C]:

50

41. Cross-section of conductors CU [mm²]:

4