

# Technical data sheet

## Product features



### Food display island heated, glass ceramic GN 6-1/1 Hemlock

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012214                 |
| TR BROWN+ 6H | <b>A group of articles - web</b> | Sideboards and showcases |



- Buffet type: BROWN - heated, glass-ceramic
- Device properties: Warmed
- Number of GN / EN: 6
- GN / EN size in device: GN 1/1
- Minimum device temperature [°C]: 60
- Maximum device temperature [°C]: 100

|                            |          |                                        |                    |
|----------------------------|----------|----------------------------------------|--------------------|
| <b>SAP Code</b>            | 00012214 | <b>Loading</b>                         | 230 V / 1N - 50 Hz |
| <b>Net Width [mm]</b>      | 2144     | <b>Number of GN / EN</b>               | 6                  |
| <b>Net Depth [mm]</b>      | 650      | <b>GN / EN size in device</b>          | GN 1/1             |
| <b>Net Height [mm]</b>     | 1488     | <b>Minimum device temperature [°C]</b> | 60                 |
| <b>Net Weight [kg]</b>     | 147.70   | <b>Maximum device temperature [°C]</b> | 100                |
| <b>Power electric [kW]</b> | 1.710    |                                        |                    |

# Technical data sheet



Technical drawing




Food display island heated, glass ceramic GN 6-1/1 Hemlock

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012214                 |
| TR BROWN+ 6H | <b>A group of articles - web</b> | Sideboards and showcases |

A= ELECTRICAL CONNECTION  
D= WATER DISCHARGE ø14

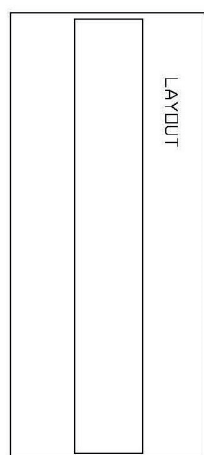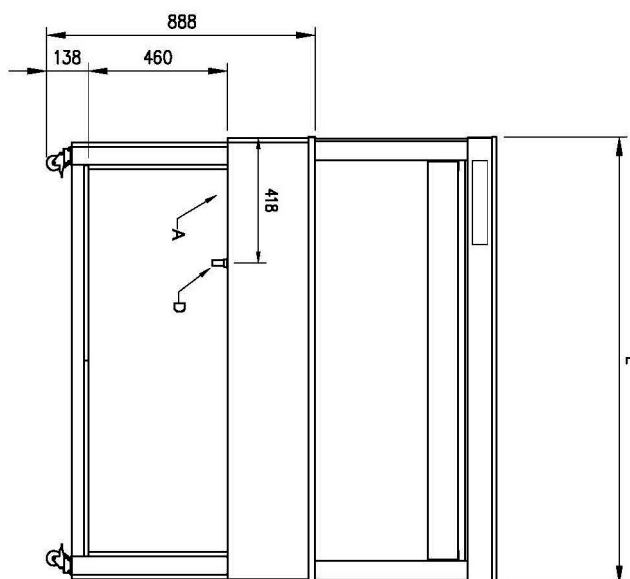

| GN  | L    |
|-----|------|
| 3/1 | 1169 |
| 4/1 | 1494 |
| 6/1 | 2144 |

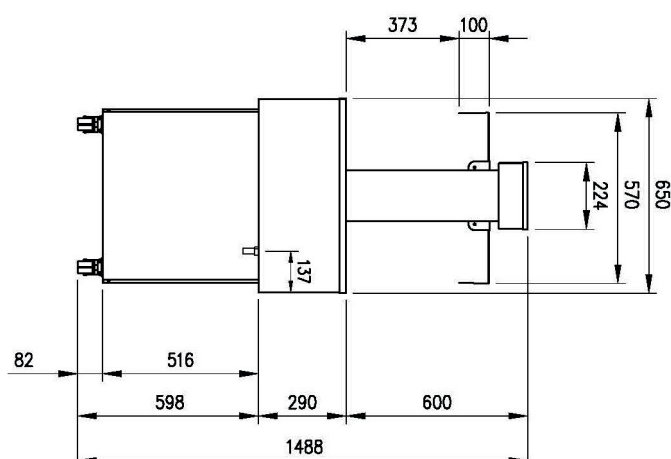

# Technical data sheet

Product benefits



## Food display island heated, glass ceramic GN 6-1/1 Hemlock

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012214                 |
| TR BROWN+ 6H | <b>A group of articles - web</b> | Sideboards and showcases |

1

### **Glass ceramic plate**

smooth hard surface  
endurance

2

### **No press**

without sharp edges and corners

3

### **All-stainless steel construction**

harmless to health for contact with food  
robustness

4

### **Halogen lighting**

heating from above

5

### **Travel wheels**

portable buffet table

6

### **Breath galley**

galerka made of hygienic pexiglass with infrared heating

# Technical data sheet

## Technical parameters



### Food display island heated, glass ceramic GN 6-1/1 Hemlock

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012214                 |
| TR BROWN+ 6H | <b>A group of articles - web</b> | Sideboards and showcases |

**1. SAP Code:**

00012214

**2. Net Width [mm]:**

2144

**3. Net Depth [mm]:**

650

**4. Net Height [mm]:**

1488

**5. Net Weight [kg]:**

147.70

**6. Gross Width [mm]:**

2208

**7. Gross depth [mm]:**

750

**8. Gross Height [mm]:**

1595

**9. Gross Weight [kg]:**

168.00

**10. Device type:**

Electric unit

**11. Material:**

Stainless steel

**12. Buffet type:**

BROWN - heated, glass-ceramic

**13. Device properties:**

Warmed

**14. Exterior color of the device:**

RAL

**15. Power electric [kW]:**

1.710

**16. Loading:**

230 V / 1N - 50 Hz

**17. Number of GN / EN:**

6

**18. GN / EN size in device:**

GN 1/1

**19. Minimum device temperature [°C]:**

60

**20. Maximum device temperature [°C]:**

100

**21. Interior lighting:**

No

**22. Cross-section of conductors CU [mm²]:**

0,5