

Product features

Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011968	Power electric [kW]	10.500
Net Width [mm]	720	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	780	Water consumption of the washing cycle [l/basket]	3
Net Height [mm]	1956	Door clear height [mm]	650
Net Weight [kg]	174.00	Rack size [mm]	560 x 630



Technical drawing

Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

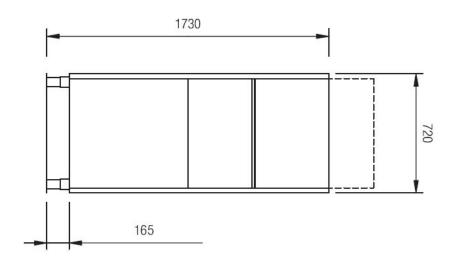

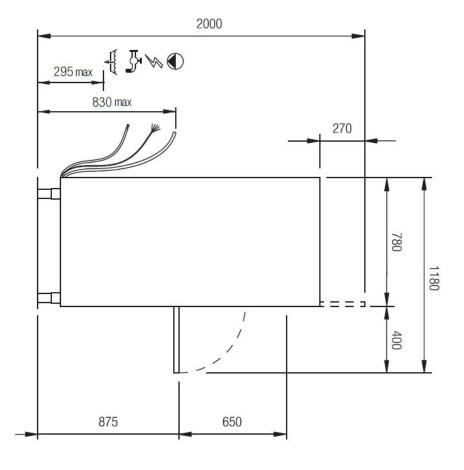





Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction round construction with stainless steel, rounded edges, Deep-drawn bathtub

2 Stainless steel washing arms
upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

3 LED Display smartScreen, a large color graphic display showing the washing progress

Double pump
unique two-way DuoFlow pump

Detergent dispensers two detergent and rinse aid dispensers

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

Energy saving
energy saving energy saving system due to lowering the
temperature of the boiler

Protection of fragile dishes
softstart system for gradual start of washing programs to protect fragile dishes

Double shell constructionstainless steel construction with insulated double jacket

Fast heating

performance management allows the current running of the boiler and basins body

Air break tank
the open system of the boiler rinse, in cooperation
with the rinse pump, ensures a constant pressure and
temperature of the rinse

Possibility of recovery
saving up to 40% of boiler energy
improves the comfort environment of the workplace

environment without steam saves water



Technical parameters

Pot and pan washer double skin	with drain pump heat	t recovery system 55x61 - 400 V
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011968		15. Number of programs:
2. Net Width [mm]: 720		16. Opening of device: Tilting down
3. Net Depth [mm]: 780 4. Net Height [mm]: 1956		17. Door clear height [mm]: 650 18. Inlet pressure [bar]: 2-4
6. Gross Width [mm]: 870		20. Number of skin:
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Number of arms for both rinsing and washing:
9. Gross Weight [kg]: 183.00		23. Arm connection: Click-clack - easy removal with one hand
10. Device type: Electric unit		24. Washing arm type: Rotating trident
11. Control type: Digital		25. Washing arm material: Composite
12. Material: AISI 304		26. Atmospheric boiler with rinse pump: Yes
13. Power electric [kW]: 10.500		27. Rinsing arm type: Rotating trident
14. Loading:		28. Rinsing arm material:

400 V / 3N - 50 Hz

Composite



Technical parameters

Pot and pan washer double s	skin with drain pump heat rec	overy system 55x61 - 400 V
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Deep drawn tank: Yes		39. Quick heating system: QuickReady - System for rapid heating of water in the tank
30. Rack support: Pressed		40. Heat recovery: 1 copper-aluminum battery - saving up to 40% of the energy needed to heat the water in the boiler, at the same time, by absorbing the released steam, it eliminates the need to use a hood
31. Tank surface strainers: stainless steel		41. Hot water electric valve: Yes
32. Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		42. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
33. Thermostop: Yes		43. Rack size [mm]: 560 × 630
34. Boiler thermostat adjust: Yes		44. Display type: LCD multifunction display
35. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump		45. USB port: Yes, for Firmware actualisation
36. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature		46. Drain pump: Yes
37. Rinse system: ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure		47. Self-diagnostics: Yes
38. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for		48. Wash pump type: two-way - DuoFlow

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

Yes

starting the next cycle

49. Detergent dispenser:

58. Program ProDrain:

Yes



Technical parameters

Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
50. Rinse aid dispenser: Yes		59. Program ProEco: Yes
51. Water consumption of the washing cycle [l/basket]:		60. Program ProLong: Yes
52. Program ProFessional 2: Yes		61. Program ProActive 5: Yes
53. Program ProFessional 4: Yes		62. Program ProActive 7: Yes
54. Program ProFessional 6: Yes		63. Cross-section of conductors CU [mm²]: 2,5
55. Program ProFessional 8: Yes		64. Water supply connection: 3/4"
56. Program ProFessional 10: Yes		65. Diameter nominal: DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

57. Program ProClean:

Yes