

# Technical data sheet

## Product features



### Undercounter dishwasher double skin 50x60 - 400 V

<b>Model</b>	<b>SAP Code</b>	00014554
NT 93	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: ProScreen - 4 digit display + 2 LED bars
- Number of programs: 9
- Number of skin: 2
- Door clear height [mm]: 400
- Rack size [mm]: 500 x 600
- Drain pump: No
- Water consumption of the washing cycle [l/basket]: 2,4-3,5
- Washing cycle time [s/basket]: 120 - 20
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

<b>SAP Code</b>	00014554	<b>Boiler power [kW]</b>	7.000
<b>Net Width [mm]</b>	600	<b>Basin volume [l]</b>	23
<b>Net Depth [mm]</b>	700	<b>Tank power [kW]</b>	2.100
<b>Net Height [mm]</b>	850	<b>Water consumption of the washing cycle [l/basket]</b>	2,4-3,5
<b>Net Weight [kg]</b>	61.00	<b>Washing cycle time [s/basket]</b>	120 - 20
<b>Power electric [kW]</b>	9.800	<b>Door clear height [mm]</b>	400
<b>Loading</b>	400 V / 3N - 50 Hz	<b>Rack size [mm]</b>	500 x 600
<b>Boiler capacity [ l ]</b>	6.00	<b>Noise of device</b>	48,9



# Technical data sheet

Technical drawing



## Undercounter dishwasher double skin 50x60 - 400 V

<b>Model</b>	<b>SAP Code</b>	00014554
NT 93	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

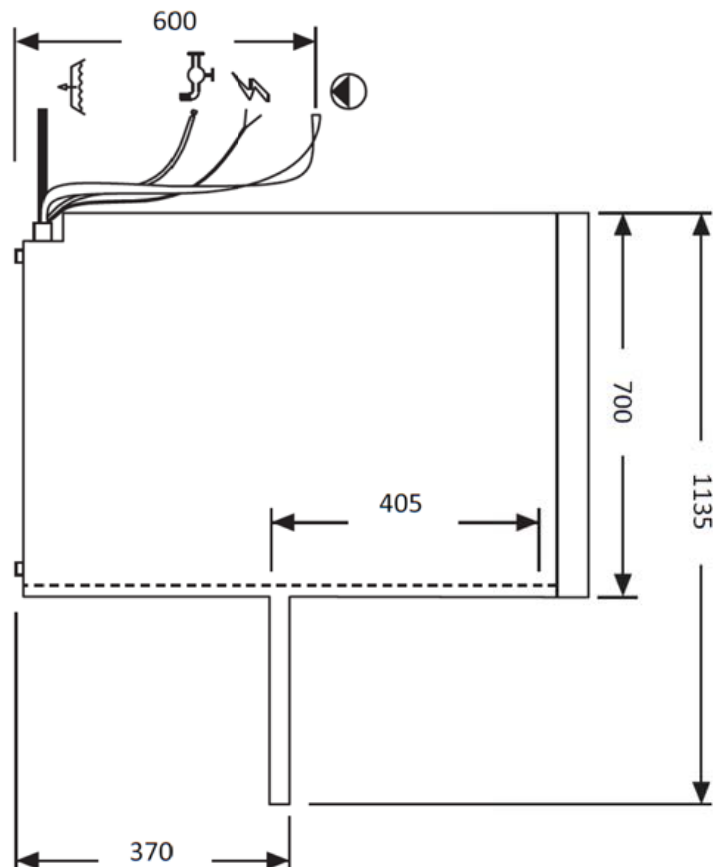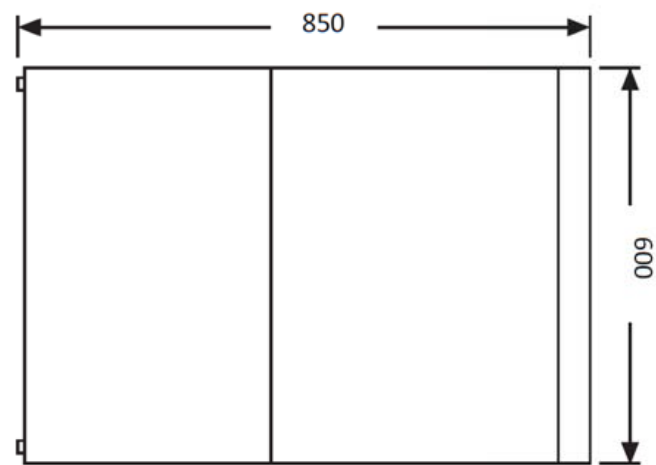

# Technical data sheet

Technical parameters



## Undercounter dishwasher double skin 50x60 - 400 V

<b>Model</b>	<b>SAP Code</b>	00014554
NT 93	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

**1. SAP Code:**

00014554

**2. Net Width [mm]:**

600

**3. Net Depth [mm]:**

700

**4. Net Height [mm]:**

850

**5. Net Weight [kg]:**

61.00

**6. Gross Width [mm]:**

700

**7. Gross depth [mm]:**

800

**8. Gross Height [mm]:**

1000

**9. Gross Weight [kg]:**

67.00

**10. Device type:**

Electric unit

**11. Control type:**

Digital

**12. Material:**

Stainless steel

**13. Power electric [kW]:**

9.800

**14. Loading:**

400 V / 3N - 50 Hz

**15. Number of programs:**

9

**16. Door clear height [mm]:**

400

**17. Inlet pressure [bar]:**

2-4

**18. Adjustable feet:**

Yes

**19. Number of skin:**

2

**20. Self-cleaning cycle:**

Yes

**21. Boiler capacity [ l ]:**

6.00

**22. Boiler power [kW]:**

7.000

**23. Basin volume [l]:**

23

**24. Tank power [kW]:**

2.100

**25. Number of arms for both rinsing and washing:**

2

**26. Arm connection:**

Click-clack - easy removal with one hand

**27. Washing arm type:**

Rotatable two-pronged

**28. Washing arm material:**

Composite

# Technical data sheet

## Technical parameters



### Undercounter dishwasher double skin 50x60 - 400 V

<b>Model</b>	<b>SAP Code</b>	00014554
NT 93	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

**29. Rinsing arm type:**

Rotating two-pronged

**30. Rinsing arm material:**

Composite

**31. Deep drawn tank:**

Yes

**32. Rack support:**

Pressed

**33. Tank surface strainers:**

composite

**34. Drain filter:**

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

**35. Thermostop:**

Yes

**36. Boiler thermostat adjust:**

Yes

**37. Rack feed capacity:**

15 - 30

**38. Detergent and rinse pump system:**

ProDose - accurate dosing with a peristaltic pump

**39. Energy Saving system:**

EnergySaving - Energy saving system due to lowering the boiler temperature

**40. Heating system:**

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

**41. Hot water electric valve:**

Yes

**42. Closing door system:**

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

**43. Rack size [mm]:**

500 x 600

**44. Display type:**

ProScreen - 4 digit display + 2 LED bars

**45. USB port:**

Yes, for Firmware actualisation

**46. Drain pump:**

No

**47. Self-diagnostics:**

Yes

**48. Wash pump type:**

two-way - DuoFlow

**49. Detergent dispenser:**

Yes

**50. Rinse aid dispenser:**

Yes

**51. Water consumption of the washing cycle [l/basket]:**

2,4-3,5

**52. Washing cycle time [s/basket]:**

120 - 20

# Technical data sheet

Technical parameters



## Undercounter dishwasher double skin 50x60 - 400 V

<b>Model</b>	<b>SAP Code</b>	00014554
NT 93	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

### 53. Rinse water temperature [°C]:

80-85

### 61. Program ProLong:

Yes

### 54. Standard equipment for device:

Basket 500 x 600 mm; stainless steel insert for GN is not part of the dishwasher

### 62. Program ProPlates:

Yes

### 55. Additional information:

Also possible: 230 V / 3N or 230 V / 1N (must be specified when ordering)

### 63. Program ProActive 5:

Yes

### 56. Program ProFessional 2:

Yes

### 64. Program ProActive 7:

Yes

### 57. Program ProFessional 4:

Yes

### 65. Noise of device:

48,9

### 58. Program ProFessional 6:

Yes

### 66. Cross-section of conductors CU [mm<sup>2</sup>]:

2

### 59. Program ProSelf:

Yes

### 67. Water supply connection:

3/4"

### 60. Program ProEco:

Yes

### 68. Diameter nominal:

DN 50