

# Technical data sheet

## Product features



### Hood type dishwasher double skin with drain pump 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011289
NT 102 P	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: ProScreen - 4 digit display + 2 LED bars
- Number of programs: 8
- Number of skin: 2
- Door clear height [mm]: 465
- Rack size [mm]: 500 x 500
- Drain pump: Yes
- Water consumption of the washing cycle [l/basket]: 2,7
- Washing cycle time [s/basket]: 60-90-180
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

<b>SAP Code</b>	00011289	<b>Boiler power [kW]</b>	7.000
<b>Net Width [mm]</b>	633	<b>Basin volume [l]</b>	22
<b>Net Depth [mm]</b>	755	<b>Tank power [kW]</b>	2.500
<b>Net Height [mm]</b>	1540	<b>Water consumption of the washing cycle [l/basket]</b>	2,7
<b>Net Weight [kg]</b>	111.00	<b>Washing cycle time [s/basket]</b>	60-90-180
<b>Power electric [kW]</b>	10.200	<b>Door clear height [mm]</b>	465
<b>Loading</b>	400 V / 3N - 50 Hz	<b>Rack size [mm]</b>	500 x 500
<b>Boiler capacity [ l ]</b>	6.00	<b>Noise of device</b>	58,6


# Technical data sheet

Technical drawing



## Hood type dishwasher double skin with drain pump 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011289
NT 102 P	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

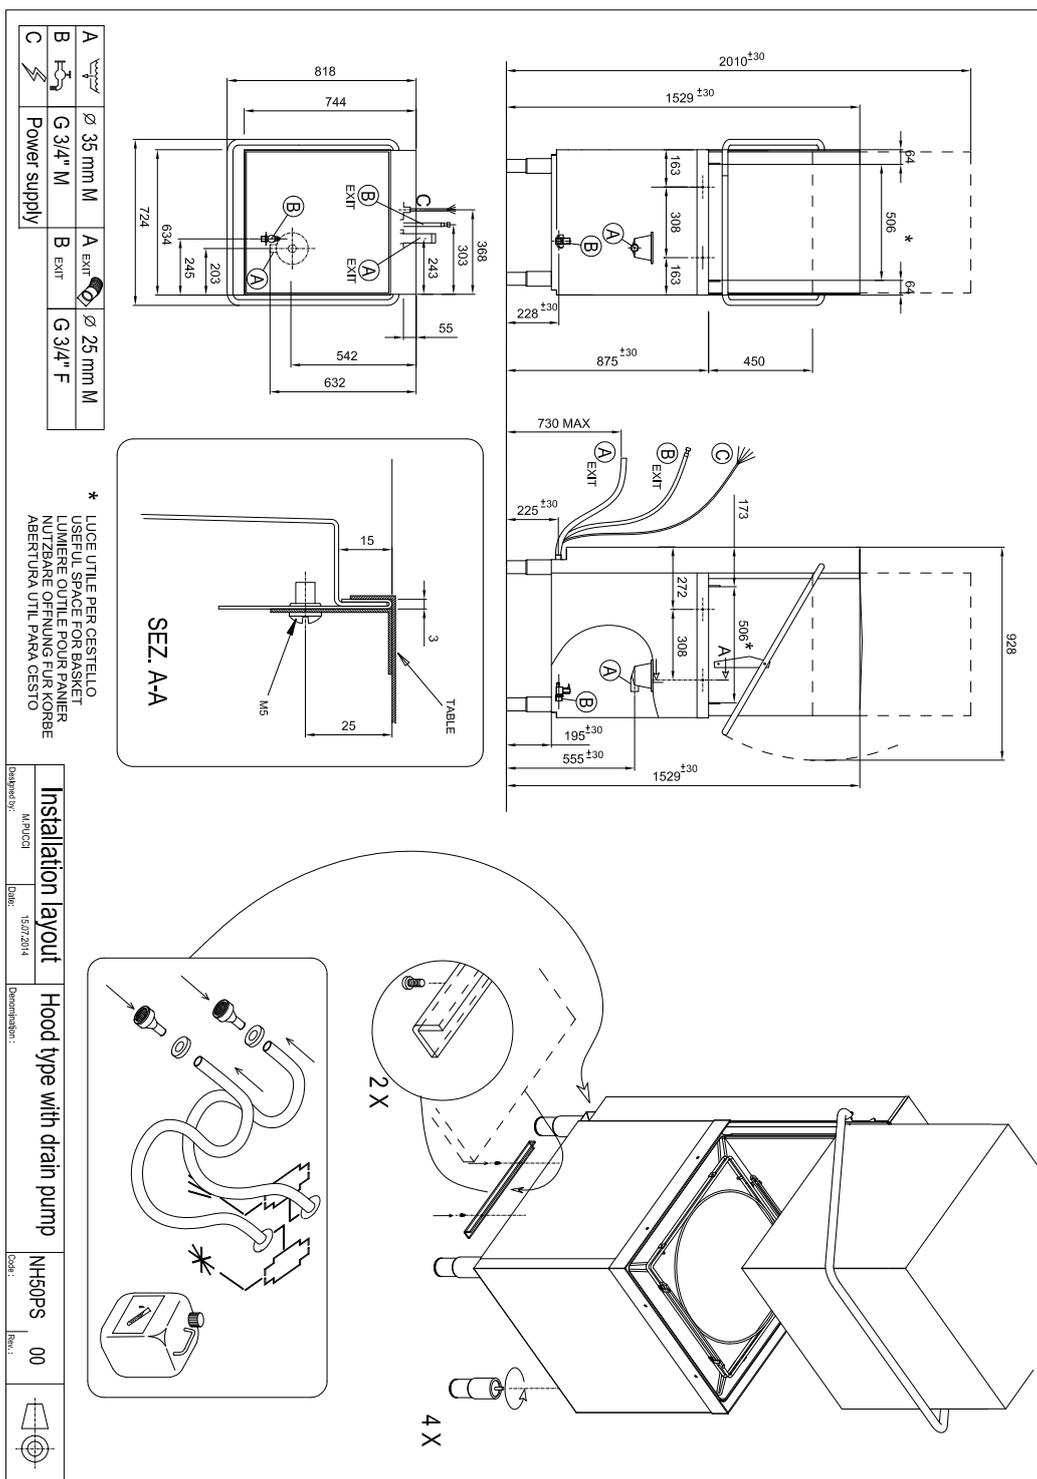

# Technical data sheet

## Product benefits



### Hood type dishwasher double skin with drain pump 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011289
NT 102 P	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

**1 Stainless steel outer shell construction**  
round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life

**2 Washing arms with a component, common for washing and rinsing**  
upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort

**3 LED Display**  
proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

**4 Double pump**  
unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

**5 Molded basket supports**  
guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

**6 Detergent dispensers**  
two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

**7 Double filter system**  
the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

**8 Energy saving**  
energy saving energy saving system due to lowering the temperature of the boiler

- cost saving

**9 Protection of fragile dishes**  
softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

**10 Double shell construction**  
stainless steel construction with insulated double jacket

- quiet operation
- energy saving

**11 Fast heating**  
performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

# Technical data sheet

Technical parameters



## Hood type dishwasher double skin with drain pump 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011289
NT 102 P	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

**1. SAP Code:**

00011289

**2. Net Width [mm]:**

633

**3. Net Depth [mm]:**

755

**4. Net Height [mm]:**

1540

**5. Net Weight [kg]:**

111.00

**6. Gross Width [mm]:**

870

**7. Gross depth [mm]:**

760

**8. Gross Height [mm]:**

1540

**9. Gross Weight [kg]:**

121.00

**10. Device type:**

Electric unit

**11. Control type:**

Digital

**12. Material:**

Stainless steel

**13. Power electric [kW]:**

10.200

**14. Loading:**

400 V / 3N - 50 Hz

**15. Number of programs:**

8

**16. Opening of device:**

Flip up

**17. Door clear height [mm]:**

465

**18. Inlet pressure [bar]:**

2-4

**19. Adjustable feet:**

Yes

**20. Number of skin:**

2

**21. Self-cleaning cycle:**

Yes

**22. Boiler capacity [ l ]:**

6.00

**23. Boiler power [kW]:**

7.000

**24. Basin volume [l]:**

22

**25. Tank power [kW]:**

2.500

**26. Number of arms for both rinsing and washing:**

2

**27. Arm connection:**

Click-clack - easy removal with one hand

**28. Washing arm type:**

Rotatable two-pronged

# Technical data sheet

## Technical parameters



### Hood type dishwasher double skin with drain pump 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011289
NT 102 P	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

**29. Washing arm material:**

Composite

**30. Rinsing arm type:**

Rotating two-pronged

**31. Rinsing arm material:**

Composite

**32. Deep drawn tank:**

Yes

**33. Rack support:**

Pressed

**34. Tank surface strainers:**

composite

**35. Drain filter:**

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

**36. Thermostop:**

Yes

**37. Boiler thermostat adjust:**

Yes

**38. Rack feed capacity:**

60-40-20

**39. Detergent and rinse pump system:**

ProDose - accurate dosing with a peristaltic pump

**40. Energy Saving system:**

EnergySaving - Energy saving system due to lowering the boiler temperature

**41. Rinse system:**

ProRinse - kompozitní ramena společná pro oplach a mytí s geometrií pro rozprašování vody v tenkých paprscích přímo proti nádobí

**42. Heating system:**

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

**43. Lift system:**

ProGlide - Required lifting force equals 3 kg thanks to counterweights and gentle guidance, reduces operator fatigue

**44. Hot water electric valve:**

Yes

**45. Closing door system:**

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

**46. Rack size [mm]:**

500 x 500

**47. Display type:**

ProScreen - 4 digit display + 2 LED bars

**48. Location of control panel:**

On the top

**49. USB port:**

Yes, for Firmware actualisation

**50. Drain pump:**

Yes

# Technical data sheet

Technical parameters



## Hood type dishwasher double skin with drain pump 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011289
NT 102 P	<b>A group of articles - web</b>	Undercounter, continuous and black ware dishwasher

### 51. Self-diagnostics:

Yes

### 52. Wash pump type:

two-way - DuoFlow

### 53. Detergent dispenser:

Yes

### 54. Rinse aid dispenser:

Yes

### 55. Water consumption of the washing cycle [l/basket]:

2,7

### 56. Washing cycle time [s/basket]:

60-90-180

### 57. Rinse water temperature [°C]:

80

### 58. Standard equipment for device:

1x glass basket, 1x plate basket, 1x cutlery basket

### 59. Additional information:

Also possible: 230 V / 3N or 230 V / 1N (must be specified when ordering)

### 60. Program ProSpeed:

Yes

### 61. Program ProFessional:

Yes

### 62. Program ProTemp:

Yes

### 63. Program ProClean:

Yes

### 64. Program ProDrain:

Yes

### 65. Program ProEco:

Yes

### 66. Program ProLong:

Yes

### 67. Program ProGlass:

Yes

### 68. Noise of device:

58,6

### 69. Cross-section of conductors CU [mm<sup>2</sup>]:

2,5

### 70. Water supply connection:

3/4"

### 71. Diameter nominal:

DN 50