

# Technical data sheet

Product features



## Proofing chamber 8x EN 60x40 solid door

<b>Model</b>	<b>SAP Code</b>	00014525
KYN 0823 G	<b>A group of articles - web</b>	Accessories



- Number of GN / EN: 8
- GN / EN size in device: GN 1/1, EN 600x400
- GN device depth: 75

<b>SAP Code</b>	00014525	<b>Power electric [kW]</b>	2.000
<b>Net Width [mm]</b>	900	<b>Loading</b>	230 V / 1N - 50 Hz
<b>Net Depth [mm]</b>	712	<b>Number of GN / EN</b>	8
<b>Net Height [mm]</b>	800	<b>GN / EN size in device</b>	GN 1/1, EN 600x400
<b>Net Weight [kg]</b>	81.00	<b>GN device depth</b>	75



# Technical data sheet

Technical drawing



## Proofing chamber 8x EN 60x40 solid door

<b>Model</b>	<b>SAP Code</b>	00014525
KYN 0823 G	<b>A group of articles - web</b>	Accessories

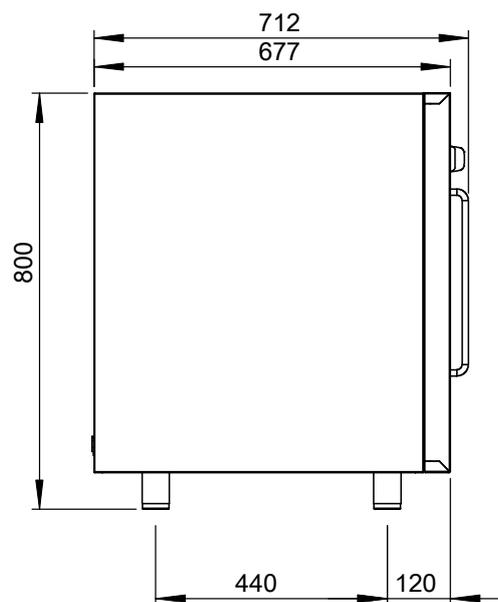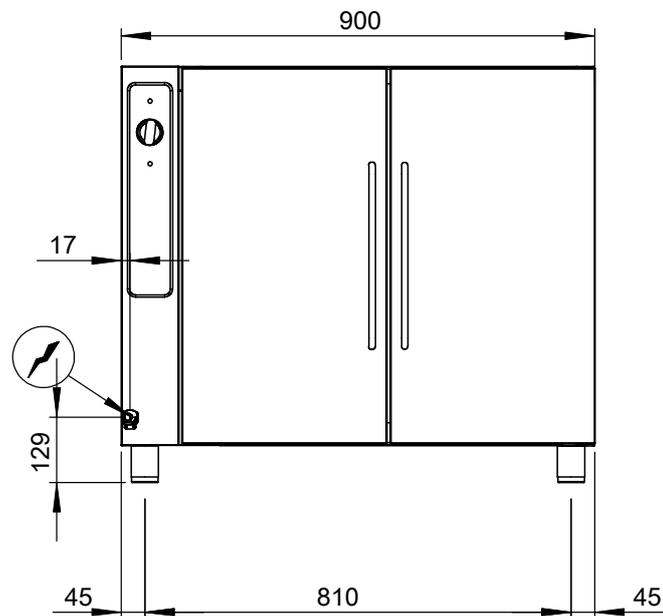

# Technical data sheet

Technical parameters



## Proofing chamber 8x EN 60x40 solid door

<b>Model</b>	<b>SAP Code</b>	00014525
KYN 0823 G	<b>A group of articles - web</b>	Accessories

**1. SAP Code:**

00014525

**2. Net Width [mm]:**

900

**3. Net Depth [mm]:**

712

**4. Net Height [mm]:**

800

**5. Net Weight [kg]:**

81.00

**6. Gross Width [mm]:**

950

**7. Gross depth [mm]:**

800

**8. Gross Height [mm]:**

970

**9. Gross Weight [kg]:**

81.00

**10. Device type:**

Electric unit

**11. Power electric [kW]:**

2.000

**12. Loading:**

230 V / 1N - 50 Hz

**13. Adjustable feet:**

Yes

**14. Distance between the layers [mm]:**

0

**15. Number of GN / EN:**

8

**16. GN / EN size in device:**

GN 1/1, EN 600x400

**17. GN device depth:**

75

**18. Cross-section of conductors CU [mm<sup>2</sup>]:**

0,5