

# Technical data sheet

## Product features



### Chilled display unit GN 5-1/1 drop-in, opening to the sides

|                   |                                  |                          |
|-------------------|----------------------------------|--------------------------|
| <b>Model</b>      | <b>SAP Code</b>                  | 00012082                 |
| SL PLATINUM+ 5 DS | <b>A group of articles - web</b> | Sideboards and showcases |



- Buffet type: PLATINUM - dynamically cooled showcase
- Device properties: Chilled
- Number of GN / EN: 5
- GN / EN size in device: GN 1/1
- GN device depth: 200
- Minimum device temperature [°C]: 4
- Maximum device temperature [°C]: 8
- Opening of device: Sliding to the sides

|                            |          |                                        |                    |
|----------------------------|----------|----------------------------------------|--------------------|
| <b>SAP Code</b>            | 00012082 | <b>Loading</b>                         | 230 V / 1N - 50 Hz |
| <b>Net Width [mm]</b>      | 1819     | <b>Number of GN / EN</b>               | 5                  |
| <b>Net Depth [mm]</b>      | 760      | <b>GN / EN size in device</b>          | GN 1/1             |
| <b>Net Height [mm]</b>     | 1210     | <b>GN device depth</b>                 | 200                |
| <b>Net Weight [kg]</b>     | 157.00   | <b>Minimum device temperature [°C]</b> | 4                  |
| <b>Power electric [kW]</b> | 0.494    | <b>Maximum device temperature [°C]</b> | 8                  |


# Technical data sheet

Technical drawing



## Chilled display unit GN 5-1/1 drop-in, opening to the sides

|                   |                                  |                          |
|-------------------|----------------------------------|--------------------------|
| <b>Model</b>      | <b>SAP Code</b>                  | 00012082                 |
| SL PLATINUM+ 5 DS | <b>A group of articles - web</b> | Sideboards and showcases |

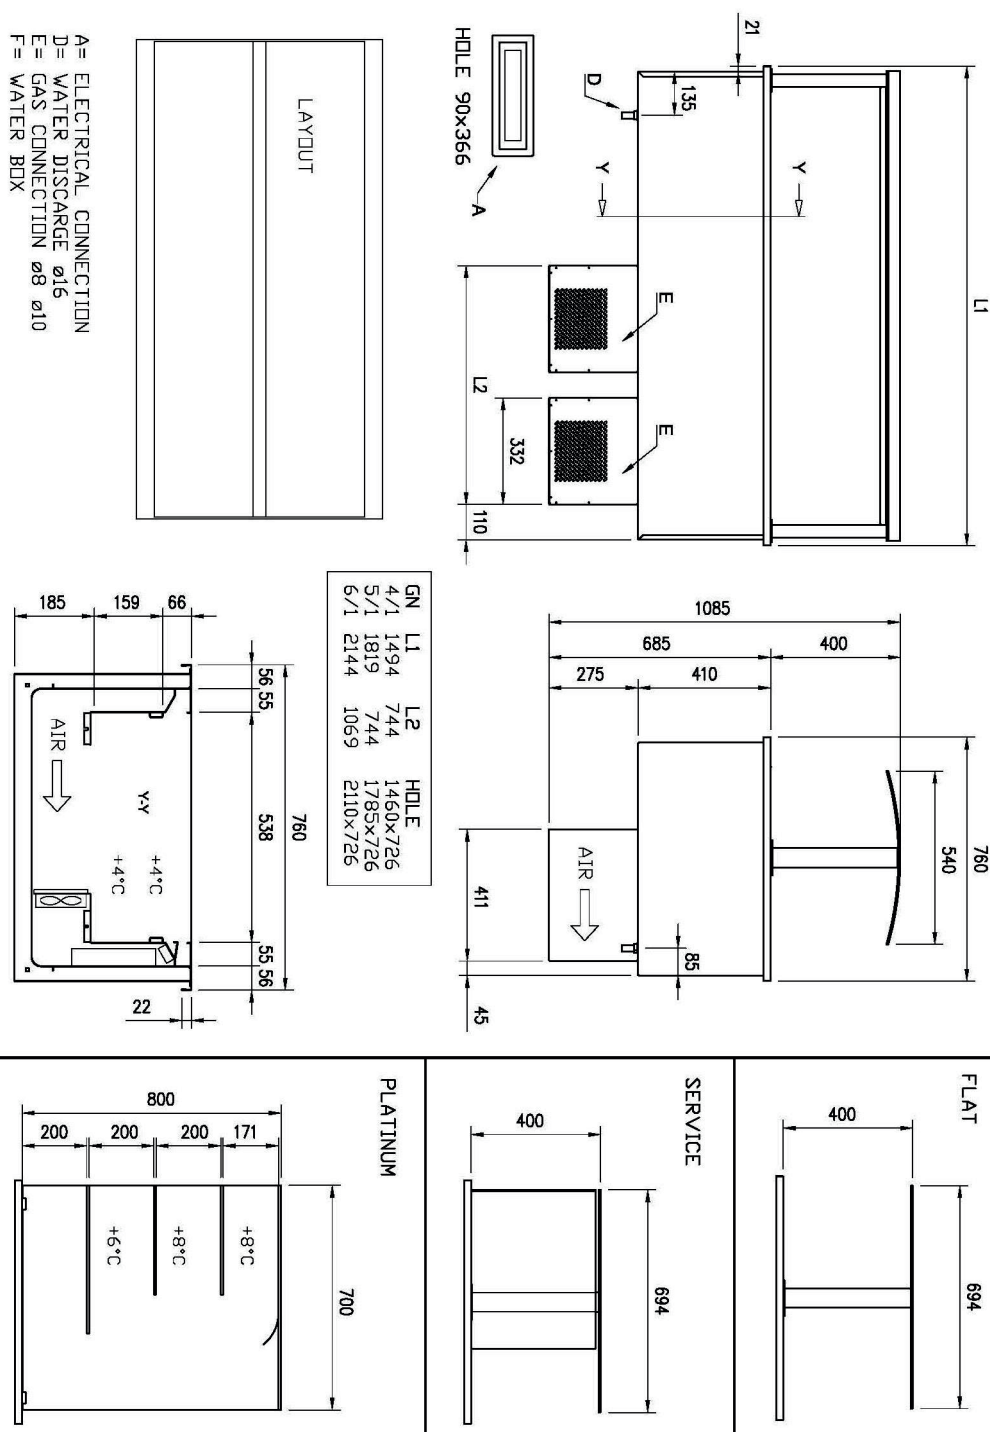

# Technical data sheet

## Product benefits



### Chilled display unit GN 5-1/1 drop-in, opening to the sides

|                   |                                  |                          |
|-------------------|----------------------------------|--------------------------|
| <b>Model</b>      | <b>SAP Code</b>                  | 00012082                 |
| SL PLATINUM+ 5 DS | <b>A group of articles - web</b> | Sideboards and showcases |

1

#### Dynamic cooling

- constant temperature in all places of the refrigerated space
- greater hygienic safety of chilled food

2

#### LED lighting

- minimal energy consumption
- economical lighting
  - attractive appearance

3

#### Surface height regulation

- a large range of the height of the bottom surface of the display case
- greater variability of product storage
  - space saving

4

#### Back attendant

- service and delivery on different sides
- possibility to refill products at any time during operation

5

#### Built-in

- the possibility to plant in a dispensing block design
- unified design of the dispensing line
  - a luxurious look that customers appreciate

# Technical data sheet

## Technical parameters



### Chilled display unit GN 5-1/1 drop-in, opening to the sides

|                   |                                  |                          |
|-------------------|----------------------------------|--------------------------|
| <b>Model</b>      | <b>SAP Code</b>                  | 00012082                 |
| SL PLATINUM+ 5 DS | <b>A group of articles - web</b> | Sideboards and showcases |

**1. SAP Code:**

00012082

**2. Net Width [mm]:**

1819

**3. Net Depth [mm]:**

760

**4. Net Height [mm]:**

1210

**5. Net Weight [kg]:**

157.00

**6. Gross Width [mm]:**

1883

**7. Gross depth [mm]:**

860

**8. Gross Height [mm]:**

1830

**9. Gross Weight [kg]:**

166.00

**10. Device type:**

Electric unit

**11. Buffet type:**

PLATINUM - dynamically cooled showcase

**12. Device properties:**

Chilled

**13. Exterior color of the device:**

Stainless steel

**14. Power electric [kW]:**

0.494

**15. Loading:**

230 V / 1N - 50 Hz

**16. Number of GN / EN:**

5

**17. GN / EN size in device:**

GN 1/1

**18. GN device depth:**

200

**19. Minimum device temperature [°C]:**

4

**20. Maximum device temperature [°C]:**

8

**21. Opening of device:**

Sliding to the sides

**22. Interior lighting:**

No

**23. Cross-section of conductors CU [mm²]:**

0,5

**24. Refrigerant:**

R290