



| Pot and pan washer double skin with drain pump 132x70 - 400 V |                           |  |
|---|---------------------------|--|
| Model   | SAP Code                  | 00011976   |
| S 302 P ABT   | A group of articles - web | Undercounter, continuous and black ware dishwasher |




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 850
- Rack size [mm]: 1310 x 700
- Water consumption of the washing cycle [l/basket]: 6
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

| SAP Code            | 00011976           | Boiler capacity [ l ]                             | 12.00      |
|---------------------|--------------------|---|------------|
| Net Width [mm]      | 1465               | Boiler power [kW]                                 | 10.500     |
| Net Depth [mm]      | 850                | Basin volume [l]                                  | 131        |
| Net Height [mm]     | 1959               | Tank power [kW]                                   | 10.500     |
| Net Weight [kg]     | 301.00             | Water consumption of the washing cycle [l/basket] | 6          |
| Power electric [kW] | 15.900             | Door clear height [mm]                            | 850        |
| Loading             | 400 V / 3N - 50 Hz | Rack size [mm]                                    | 1310 x 700 |



Technical drawing

| Pot and pan washer double skin with drain pump 132x70 - 400 V |                           |  |
|---|---------------------------|--|
| Model   | SAP Code                  | 00011976   |
| S 302 P ABT   | A group of articles - web | Undercounter, continuous and black ware dishwasher |

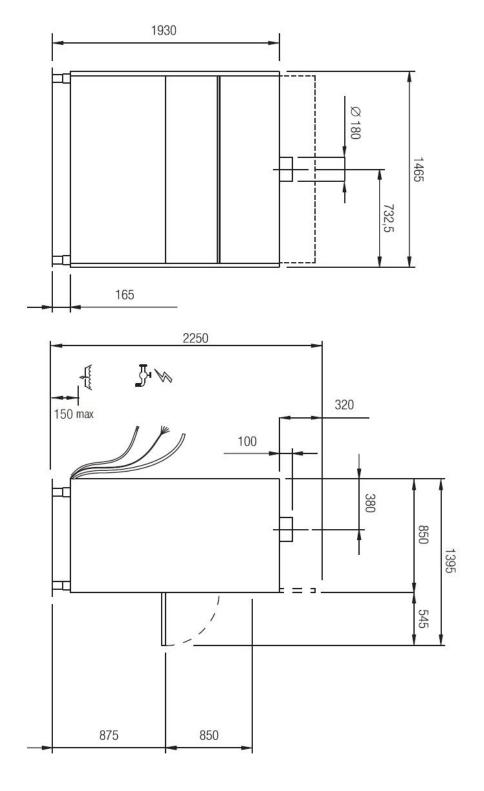





| Pot and pan washer double skin with drain pump 132x70 - 400 V |                           |  |
|---|---------------------------|--|
| Model   | SAP Code                  | 00011976   |
| S 302 P ABT   | A group of articles - web | Undercounter, continuous and black ware dishwasher |

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Stainless steel washing arms upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm
  - easy and safe handling during cleaning; higher user comfort
- **LED Display** smartScreen, a large color graphic display showing the washing progress
  - easy control of the dishwasher operation
  - continuous information on the status of the wash cycle
  - diagnostics in the event of a fault
- **Double pump** unique two-way DuoFlow pump
  - distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- **Detergent dispensers** two detergent and rinse aid dispensers
  - precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
  - **Double filter system** the chamber filter and the waste filter together with the
    - increased water purification efficiency - higher washing efficiency; longer life of the washing bath

ArchiMedes system provide a discharge system with

- **Energy saving** energy saving energy saving system due to lowering the temperature of the boiler
  - cost saving

**Protection of fragile dishes** 

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- **Double shell construction** stainless steel construction with insulated double jacket
  - quiet operation energy saving
- **Fast heating** 10 performance management allows the current running of the boiler and basins body
  - guick first warm-up of the dishwasher
  - smooth operation

Air break tank the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization



#### Technical parameters

| Pot and pan washer double skin w                 | vith drain pump 132       | x70 - 400 V  |
|--|---------------------------|--|
| Model  | SAP Code                  | 00011976   |
| S 302 P ABT                                      | A group of articles - web | Undercounter, continuous and black ware dishwasher             |
| <b>1. SAP Code:</b> 00011976                     |                           | <b>15. Number of programs:</b>                                 |
| 2. Net Width [mm]:<br>1465                       |                           | <b>16. Opening of device:</b> Tilting down                     |
| 3. Net Depth [mm]: 850  4. Net Height [mm]: 1959 |                           | 17. Door clear height [mm]: 850  18. Inlet pressure [bar]: 1-6 |
|  |                           |  |
| <b>6. Gross Width [mm]:</b> 1630                 |                           | 20. Number of skin:  |
| 7. Gross depth [mm]: 980                         |                           | 21. Self-cleaning cycle: Yes                                   |
| 8. Gross Height [mm]:<br>2230                    |                           | 22. Boiler capacity [ l ]: 12.00                               |
| 9. Gross Weight [kg]:<br>317.00                  |                           | 23. Boiler power [kW]:<br>10.500                               |
| 10. Device type:<br>Electric unit                |                           | 24. Basin volume [l]:  |
| 11. Control type:<br>Digital                     |                           | 25. Tank power [kW]: 10.500                                    |
| <b>12. Material:</b> AISI 304                    |                           | 26. Number of arms for both rinsing and washing:               |
| 13. Power electric [kW]:<br>15.900               |                           | <b>27. Arm connection:</b> Hand loosen/tighten screw           |
| 14. Loading:                                     |                           | 28. Washing arm type:  |

400 V / 3N - 50 Hz

Rotating trident



#### Technical parameters

| Pot and pan washer double skin v  | vith drain pump 132x70    | - 400 V   |
|---|---------------------------|---|
| Model   | SAP Code                  | 00011976  |
| S 302 P ABT   | A group of articles - web | Undercounter, continuous and black ware dishwasher  |
| <b>29. Washing arm material:</b> Stainless steel  |                           | <b>40. Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the boiler temperature   |
| <b>30. Atmospheric boiler with rinse pump:</b> Yes  |                           | <b>41. Rinse system:</b> UltraRinse2 - stainless steel rinsing arms including stainless steel nozzles with a geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure |
| 31. Rinsing arm type: Rotating trident  |                           | <b>42. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle  |
| <b>32. Rinsing arm material:</b> Stainless steel  |                           | <b>43. Quick heating system:</b> QuickReady - System for rapid heating of water in the tank   |
| 33. Deep drawn tank: Yes  |                           | <b>44. Hot water electric valve:</b> Yes  |
| 34. Rack support: Pressed   |                           | <b>45. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes  |
| <b>35. Tank surface strainers:</b> stainless steel  |                           | <b>46. Rack size [mm]:</b> 1310 × 700   |
| <b>36. Drain filter:</b> Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste |                           | <b>47. Display type:</b> LCD multifunction display  |
| 37. Thermostop: Yes   |                           | <b>48. USB port:</b> Yes, for Firmware actualisation  |
| 38. Boiler thermostat adjust: Yes   |                           | <b>49. Drain pump:</b> Yes  |

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

50. Self-diagnostics:

Yes



#### Technical parameters

| Pot and pan washer double skin                                | with drain pump 132x7     | 0 - 400 V  |
|---|---------------------------|--|
| Model   | SAP Code                  | 00011976   |
| S 302 P ABT   | A group of articles - web | Undercounter, continuous and black ware dishwasher |
| <b>51. Wash pump type:</b> two-way - DuoFlow                  |                           | <b>61. Program ProClean:</b> Yes                   |
| <b>52. Detergent dispenser:</b> Yes                           |                           | <b>62. Program ProDrain:</b> Yes                   |
| <b>53. Rinse aid dispenser:</b> Yes                           |                           | <b>63. Program ProEco:</b> Yes                     |
| <b>54.</b> Water consumption of the washing cycle [l/basket]: |                           | <b>64. Program ProLong:</b> Yes                    |
| <b>55. Rinse water temperature [°C]:</b> 80-85                |                           | <b>65. Program ProActive 5:</b> Yes                |
| <b>56. Program ProFessional 2:</b> Yes                        |                           | <b>66. Program ProActive 7:</b> Yes                |
| <b>57. Program ProFessional 4:</b> Yes                        |                           | 67. Cross-section of conductors CU [mm²]:          |
| <b>58. Program ProFessional 6:</b> Yes                        |                           | <b>68. Water supply connection:</b> 3/4"           |
| 59. Program ProFessional 8: Yes                               |                           | <b>69. Diameter nominal:</b> DN 50                 |

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

60. Program ProFessional 10:

Yes