

# Technical data sheet

## Product features



### Display unit chilled GN 5-1/1 - 30 mm drop-in

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012069                 |
| SL LIME+ 5   | <b>A group of articles - web</b> | Sideboards and showcases |



- Buffet type: LIME - chilled, static cooling, shallow
- Device properties: Chilled
- Number of GN / EN: 5
- GN / EN size in device: GN 1/1
- GN device depth: 30
- Minimum device temperature [°C]: 4
- Maximum device temperature [°C]: 8

|                            |          |                                        |                    |
|----------------------------|----------|----------------------------------------|--------------------|
| <b>SAP Code</b>            | 00012069 | <b>Loading</b>                         | 230 V / 1N - 50 Hz |
| <b>Net Width [mm]</b>      | 1819     | <b>Number of GN / EN</b>               | 5                  |
| <b>Net Depth [mm]</b>      | 650      | <b>GN / EN size in device</b>          | GN 1/1             |
| <b>Net Height [mm]</b>     | 100      | <b>GN device depth</b>                 | 30                 |
| <b>Net Weight [kg]</b>     | 55.00    | <b>Minimum device temperature [°C]</b> | 4                  |
| <b>Power electric [kW]</b> | 0.247    | <b>Maximum device temperature [°C]</b> | 8                  |

# Technical data sheet

Technical drawing









## Display unit chilled GN 5-1/1 - 30 mm drop-in

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012069                 |
| SL LIME+ 5   | <b>A group of articles - web</b> | Sideboards and showcases |

A = ELECTRICAL CONNECTION  
D = WATER DISCHARGE Ø16  
E = GAS CONNECTION Ø6 Ø8  
F = WATER BOX

| GN  | L    | HOLE     |
|-----|------|----------|
| 2/1 | 844  | 814x620  |
| 3/1 | 1169 | 1139x620 |
| 4/1 | 1494 | 1464x620 |
| 5/1 | 1819 | 1789x620 |
| 6/1 | 2144 | 2114x620 |

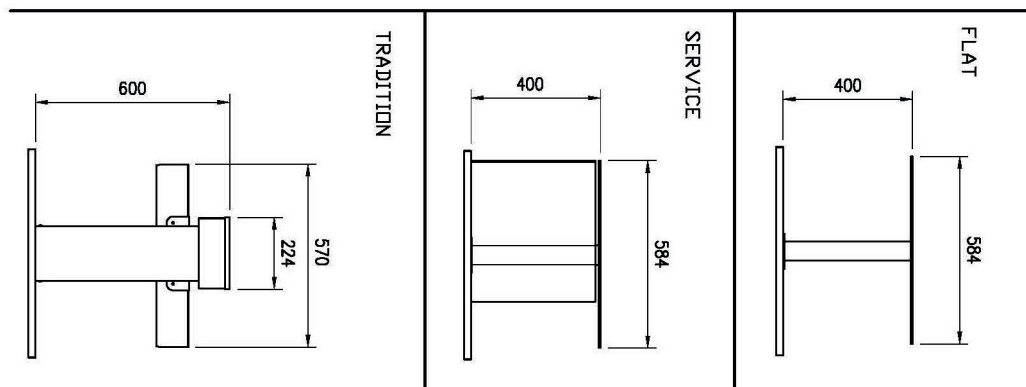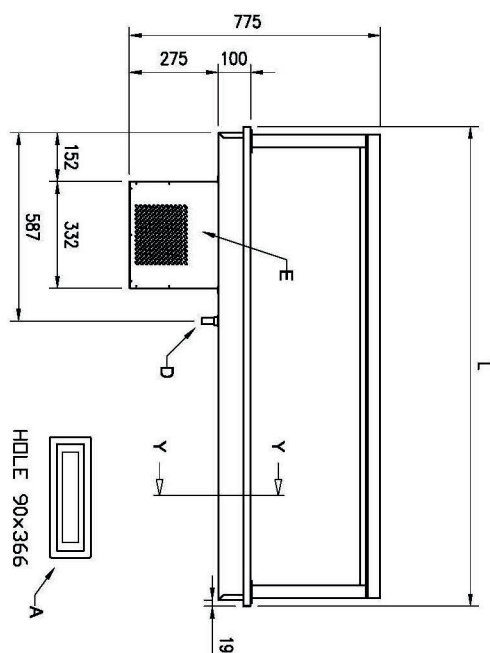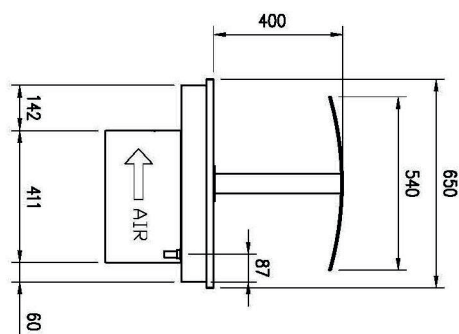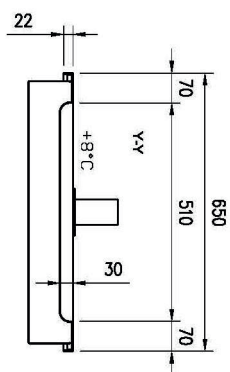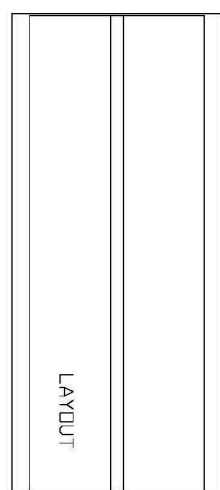

# Technical data sheet

Product benefits



## Display unit chilled GN 5-1/1 - 30 mm drop-in

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012069                 |
| SL LIME+ 5   | <b>A group of articles - web</b> | Sideboards and showcases |

1

### **Built-in**

the possibility to plant in a dispensing block design

2

### **Static cooling**

simultaneous use of direct injection and boiler, maintenance of 100% humidity, or its regulation

3

### **Depth 30mm**

the possibility of placing plates and trays

4

### **Rounded corners**

basins without sharp edges and corners

5

### **Removable evaporator filter**

basins without sharp edges and corners

6

### **All-stainless steel construction**

harmless to health for contact with food  
robustness

# Technical data sheet

## Technical parameters



### Display unit chilled GN 5-1/1 - 30 mm drop-in

|              |                                  |                          |
|--------------|----------------------------------|--------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012069                 |
| SL LIME+ 5   | <b>A group of articles - web</b> | Sideboards and showcases |

**1. SAP Code:**

00012069

**2. Net Width [mm]:**

1819

**3. Net Depth [mm]:**

650

**4. Net Height [mm]:**

100

**5. Net Weight [kg]:**

55.00

**6. Gross Width [mm]:**

1883

**7. Gross depth [mm]:**

714

**8. Gross Height [mm]:**

1100

**9. Gross Weight [kg]:**

66.00

**10. Device type:**

Electric unit

**11. Material:**

AISI 304

**12. Buffet type:**

LIME - chilled, static cooling, shallow

**13. Device properties:**

Chilled

**14. Exterior color of the device:**

Stainless steel

**15. Power electric [kW]:**

0.247

**16. Loading:**

230 V / 1N - 50 Hz

**17. Number of GN / EN:**

5

**18. GN / EN size in device:**

GN 1/1

**19. GN device depth:**

30

**20. Minimum device temperature [°C]:**

4

**21. Maximum device temperature [°C]:**

8

**22. Cross-section of conductors CU [mm²]:**

0,5

**23. Refrigerant:**

R290