Technical data sheet

Hood type dishwasher double skin softener heat recovery system 50x60 - 400 V

Product features





tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

nood type dishwasher double skin soltener neat recovery system soltoo - 400 v			
Model	SAP Code	00011301	
TTA 162 REC ABT	A group of articles - web	Undercounter, continuous and blac	k ware dishwasher
		 To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) Display type: LCD multifunction display Number of programs: 13 Number of skin: 2 Door clear height [mm]: 465 Rack size [mm]: 600 x 500 Water consumption of the washing cycle [l/basket]: 2,4 Washing cycle time [s/basket]: 60-90-180 Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump Wash pump type: two-way - DuoFlow Self-cleaning cycle: Yes Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste 	
SAP Code	00011301	Boiler power [kW]	7.000
Net Width [mm]	835	Basin volume [l]	30
Net Depth [mm]	788	Tank power [kW]	2.500
Net Height [mm]	2265	Water consumption of the wash- ing cycle [l/basket]	2,4
Net Weight [kg]	125.00	Washing cycle time [s/basket]	60-90-180
Power electric [kW]	11.000	Door clear height [mm]	465
Loading	400 V / 3N - 50 Hz	Rack size [mm]	600 x 500
Boiler capacity [l]	12.00		

2025-05-21



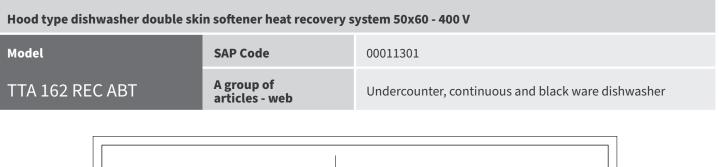

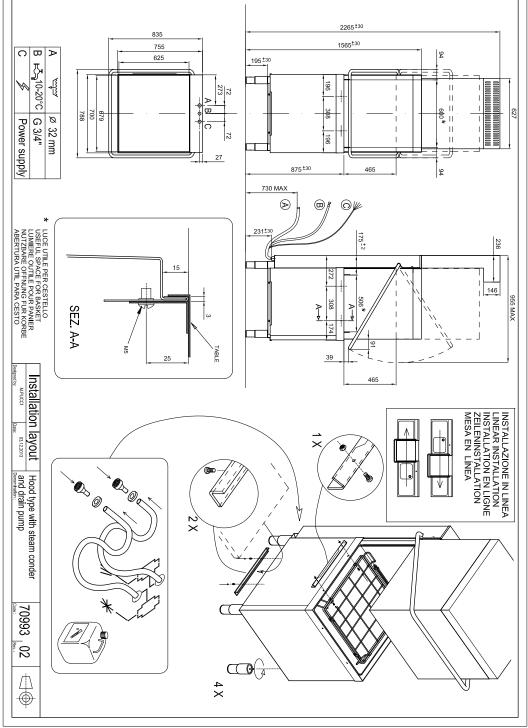

Technical data sheet

Product benefits



Hood type dishwasher double skin softener heat recovery system 50x60 - 400 V				
Model		SAP Code	000113	301
TTA 1	.62 REC ABT	A group of articles - web	Under	counter, continuous and black ware dishwasher
1	Stainless steel outer shel round construction with stainle Deep-drawn bathtub		10	Double shell construction stainless steel construction with insulated double jacket
2	Washing arms with a component, common for washing and rinsing upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal LED Display proScreen 4 local display + 2 LED strips		11	Fast heating performance management allows the current running of the boiler and basins body
3			12	Possibility of recovery saving up to 40% of boiler energy improves the comfort environment of the workplace environment without steam saves water
4	Double pump unique two-way DuoFlow pum	p		
5	Molded basket supports guide rails for the baskets mole the dishwasher	ded from the body of		
6	Detergent dispensers two detergent and rinse aid dis	spensers		
7	Double filter system the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency			
8	Energy saving energy saving energy saving sy temperature of the boiler	stem due to lowering the		
9	Protection of fragile dish softstart system for gradual sta protect fragile dishes			

Technical parameters



Hood type dishwasher double skin softener heat recovery system 50x60 - 400 V		
Model	SAP Code	00011301
TTA 162 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011301		15. Number of programs: 13
2. Net Width [mm]: 835		16. Opening of device: Flip up
3. Net Depth [mm]: 788		17. Door clear height [mm]: 465
4. Net Height [mm]: 2265		18. Adjustable feet: Yes
5. Net Weight [kg]: 125.00		19. Number of skin:
6. Gross Width [mm]: 838		20. Self-cleaning cycle: Yes
7. Gross depth [mm]: 885		21. Boiler capacity [l]: 12.00
8. Gross Height [mm]: 2314		22. Boiler power [kW]: 7.000
9. Gross Weight [kg]: 135.00		23. Basin volume [l]: 30
10. Device type: Electric unit		24. Tank power [kW]: 2.500
11. Control type: Digital		25. Number of arms for both rinsing and washing:
12. Material: Stainless steel		26. Arm connection: Hand loosen/tighten screw
13. Power electric [kW]: 11.000		27. Washing arm type: Rotatable two-pronged
14. Loading: 400 V / 3N - 50 Hz		28. Washing arm material: Stainless steel

Technical parameters



Model	SAP Code	00011301
TTA 162 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Atmospheric boiler with rinse pur Yes	np:	39. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
30. Rinsing arm type: Rotating two-pronged		40. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature
31. Rinsing arm material: Stainless steel		41. Rinse system: ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure
2. Deep drawn tank: Yes		42. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
33. Rack support: Pressed		43. Quick heating system: QuickReady - System for rapid heating of water in the tank
34. Tank surface strainers: stainless steel		44. Lift system: ProGlide - Required lifting force equals 3 kg thanks to counterweights and gentle guidance, reduces operator fatigue
5. Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		45. Heat recovery: 1 copper-aluminum battery - saving up to 40% of the energy needed to heat the water in the boiler, at the same time, by absorbing the released steam, it eliminates the need to use a hood
36. Thermostop: Yes		46. Hot water electric valve: Yes
7. Boiler thermostat adjust: Yes		47. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
38. Rack feed capacity: 60-40-20		48. Rack size [mm]: 600 × 500

Technical parameters



Hood type dishwasher double skin softener heat recovery system 50x60 - 400 V			
Model	SAP Code	00011301	
TTA 162 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher	
49. Built-in softener: Yes		63. Program ProFessional: Yes	
50. Display type:		64. Program ProTemp:	
LCD multifunction display		Yes	
51. Location of control panel:		65. Program ProClean:	
On the top		Yes	
52. USB port:		66. Program ProDrain:	
Yes, for Firmware actualisation		Yes	
53. Drain pump:		67. Program ProEco:	
Yes		Yes	
54. Self-diagnostics:		68. Program ProNew:	
Yes		Yes	
55. Wash pump type:		69. Program ProLong:	
two-way - DuoFlow		Yes	
56. Detergent dispenser:		70. Program ProGlass:	
Yes		Yes	
57. Rinse aid dispenser:		71. Program ProWater:	
Yes		Yes	
58. Water consumption of the washing cycle [l/basket]: 2,4		72. Program ProActive: Yes	
59. Washing cycle time [s/basket]:		73. Program ProSteel:	
60-90-180		Yes	
60. Rinse water temperature [°C]:		74. Program ProSan:	
80		Yes	
61. Standard equipment for device: 1x glass basket, 1x plate basket, 1x cutlery basket		75. Cross-section of conductors CU [mm²]: 2,5	
62. Program ProSpeed: Yes		76. Water supply connection: 3/4"	



Hood type dishwasher double skin softener heat recovery system 50x60 - 400 V		
Model	SAP Code	00011301
TTA 162 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

77. Diameter nominal:

DN 50