Technical data sheet

Product features

Cooling cabinet 2x 280 l, double door, GN 2/1, stainless steel 230 V / 1N		
Model	**SAP Code**	00006514
LS 2350	**A group of articles - web**	Refrigeration and freezer cabinets



- GN / EN size in device: GN 2/1
- Chamber volume [l]: 560
- Minimum device temperature [°C]: -2
- Minimum device temperature [°C] 2: -2
- Maximum device temperature [°C]: 8
- Maximum device temperature [°C] 2: 8
- Insulation thickness [mm]: 70
- Control type: Digital
- Interior lighting: Yes
- Door lock: Yes

SAP Code	00006514	**Net Volume [m3]**	1.136
Net Width [mm]	710	**Number of GN / EN**	4
Net Depth [mm]	800	**GN / EN size in device**	GN 2/1
Net Height [mm]	2000	**Minimum device temperature [°C]**	-2
Net Weight [kg]	165.00	**Minimum device temperature [°C] 2**	-2
Power electric [kW]	0.540	**Maximum device temperature [°C]**	8
Loading	230 V / 1N - 50 Hz	**Maximum device temperature [°C] 2**	8
Energy class	D	**Refrigerant**	R290
Chamber volume [l]	560	**Climate class**	5
Gross Volume [m3]	1.339		


RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical drawing

Cooling cabinet 2x 280 l, double door, GN 2/1, stainless steel 230 V / 1N		
Model	**SAP Code**	00006514
LS 2350	**A group of articles - web**	Refrigeration and freezer cabinets



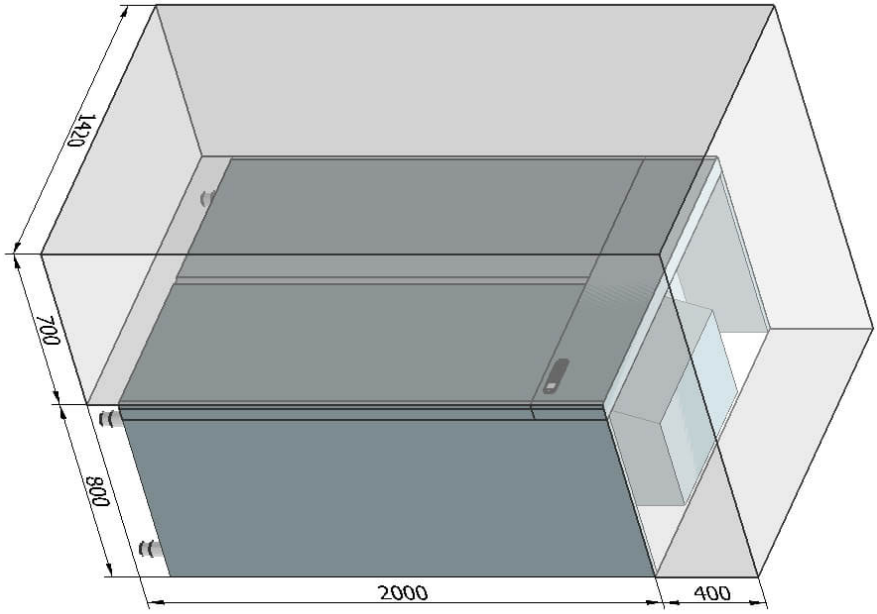

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Product benefits

Cooling cabinet 2x 280 l, double door, GN 2/1, stainless steel 230 V / 1N		
Model	**SAP Code**	00006514
LS 2350	**A group of articles - web**	Refrigeration and freezer cabinets

1 **Insulation 70mm**
minimal losses
- energy saving

2 **Two-sided opening**
location variability
- greater operational efficiency
- better kitchen ergonomics

3 **All-stainless design**
corrosion resistance
- longer service life
- health safety

4 **Automatic defrosting**
nothing needs to be watched
- always working properly without extra operator requirements

5 **Wheels, legs**
variability
- user comfort

6 **Climate class tropico**
works up to 43 °C
- guaranteed operation even in a warm kitchen environment

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Cooling cabinet 2x 280 l, double door, GN 2/1, stainless steel 230 V / 1N

Model	SAP Code	00006514
LS 2350	A group of articles - web	Refrigeration and freezer cabinets

1. **SAP Code:**
   00006514
2. **Net Width [mm]:**
   710
3. **Net Depth [mm]:**
   800
4. **Net Height [mm]:**
   2000
5. **Net Weight [kg]:**
   165.00
6. **Gross Width [mm]:**
   750
7. **Gross depth [mm]:**
   850
8. **Gross Height [mm]:**
   2100
9. **Gross Weight [kg]:**
   170.00
10. **Device type:**
    Electric unit
11. **Power electric [kW]:**
    0.540
12. **Loading:**
    230 V / 1N - 50 Hz
13. **Energy class:**
    D
14. **Refrigerant:**
    R290
15. **Cooling type:**
    Dinamic
16. **Material:**
    Stainless steel
17. **Exterior color of the device:**
    Stainless steel
18. **Max ambient temperature [°C]:**
    43
19. **Device properties 2:**
    Cooling
20. **GN / EN size in device:**
    GN 2/1
21. **Number of GN / EN:**
    4
22. **Chamber volume [l]:**
    560
23. **Gross Volume [m3]:**
    1.339
24. **Net Volume [m3]:**
    1.136
25. **Adjustable feet:**
    Yes
26. **Insulation thickness [mm]:**
    70
27. **Gasket:**
    Yes
28. **Number of doors:**
    2

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Cooling cabinet 2x 280 l, double door, GN 2/1, stainless steel 230 V / 1N		
Model	**SAP Code**	00006514
LS 2350	**A group of articles - web**	Refrigeration and freezer cabinets

29. Unit:
Yes

30. Control type:
Digital

31. Door lock:
Yes

32. Interior lighting:
Yes

33. Minimum device temperature [°C]:
-2

34. Minimum device temperature [°C] 2:
-2

35. Maximum device temperature [°C]:
8

36. Maximum device temperature [°C] 2:
8

37. Defrosting cycle:
Yes

38. Number of grids:
4

39. Climate class:
5

40. Cross-section of conductors CU [mm²]:
0,5

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062