

#### **Product features**

Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011968	Power electric [kW]	10.500
Net Width [mm]	720	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	780	Water consumption of the washing cycle [l/basket]	3
Net Height [mm]	1956	Door clear height [mm]	650
Net Weight [kg]	174.00	Rack size [mm]	560 x 630



Technical drawing

Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

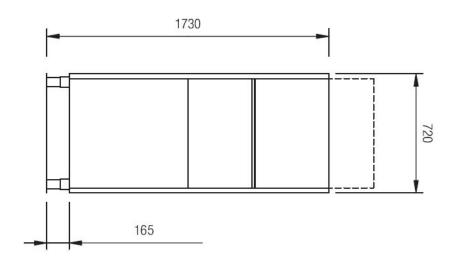

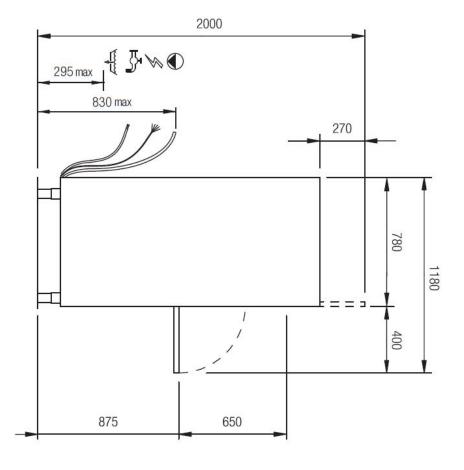





Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- 2 Stainless steel washing arms
  upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm
  - easy and safe handling during cleaning; higher user comfort
- 3 LED Display smartScreen, a large color graphic display showing the washing progress
  - easy control of the dishwasher operation
  - continuous information on the status of the wash cycle
  - diagnostics in the event of a fault

Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Detergent dispensers
  two detergent and rinse aid dispensers

precise chemical dosing by ProDose - pre

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
  - higher washing efficiency; longer life of the washing bath

Energy saving energy saving system due to lowering the temperature of the boiler

cost saving

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- **Double shell construction**stainless steel construction with insulated double jacket
  - quiet operationenergy saving

smooth operation

**10** Fast heating performance management allows the current

- performance management allows the current running of the boiler and basins body
  - quick first warm-up of the dishwasher
- Air break tank

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

- possibility to use in HACCP systems water temperature suitable for sterilization
- Possibility of recovery
  saving up to 40% of boiler energy
  improves the comfort environment of the workplace
  environment without steam
  - saving on energy and water costs; environmentally friendly system; safe system; pleasant workplace



Technical parameters

Pot and pan washer double	skin with drain pump hea	t recovery system 55x61 - 400 V
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>1. SAP Code:</b> 00011968		<b>15. Number of programs:</b>
<b>2. Net Width [mm]:</b> 720		<b>16. Opening of device:</b> Tilting down
<b>3. Net Depth [mm]:</b> 780		17. Door clear height [mm]: 650
4. Net Height [mm]: 1956		18. Inlet pressure [bar]: 2-4
<b>5. Net Weight [kg]:</b> 174.00		19. Adjustable feet: Yes
<b>6. Gross Width [mm]:</b> 870		20. Number of skin:
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Number of arms for both rinsing and washing:
9. Gross Weight [kg]: 183.00		23. Arm connection:  Click-clack - easy removal with one hand
<b>10. Device type:</b> Electric unit		<b>24. Washing arm type:</b> Rotating trident
<b>11. Control type:</b> Digital		25. Washing arm material: Composite
<b>12. Material:</b> AISI 304		26. Atmospheric boiler with rinse pump: Yes
13. Power electric [kW]: 10.500		27. Rinsing arm type: Rotating trident
14. Loading:		28. Rinsing arm material:

400 V / 3N - 50 Hz

Composite



#### Technical parameters

Pot and pan washer double skin	with drain pump heat rec	covery system 55x61 - 400 V
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Deep drawn tank: Yes		<b>39. Quick heating system:</b> QuickReady - System for rapid heating of water in the tank
30. Rack support: Pressed		40. Heat recovery:  1 copper-aluminum battery - saving up to 40% of the energy needed to heat the water in the boiler, at the same time, by absorbing the released steam, it eliminates the need to use a hood
<b>31. Tank surface strainers:</b> stainless steel		<b>41. Hot water electric valve:</b> Yes
32. Drain filter:  Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		<b>42. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
33. Thermostop: Yes		<b>43. Rack size [mm]:</b> 560 × 630
34. Boiler thermostat adjust: Yes		<b>44. Display type:</b> LCD multifunction display
<b>35. Detergent and rinse pump system:</b> ProDose - accurate dosing with a peristaltic pump		<b>45. USB port:</b> Yes, for Firmware actualisation
36. Energy Saving system:  EnergySaving - Energy saving system due to lowering the boiler temperature		<b>46. Drain pump:</b> Yes
37. Rinse system:  ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure		<b>47. Self-diagnostics:</b> Yes
38. Heating system:  HotWash - System of simultaneous operation of the heating		<b>48. Wash pump type:</b> two-way - DuoFlow

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

Yes

starting the next cycle

49. Detergent dispenser:

element of the bath and the boiler, reducing the time for

58. Program ProDrain:

Yes



#### Technical parameters

Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V		
Model	SAP Code	00011968
S 107 REC ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>50. Rinse aid dispenser:</b> Yes		59. Program ProEco: Yes
<b>51.</b> Water consumption of the washing cycle [l/basket]:		<b>60. Program ProLong:</b> Yes
<b>52. Program ProFessional 2:</b> Yes		61. Program ProActive 5: Yes
53. Program ProFessional 4: Yes		<b>62. Program ProActive 7:</b> Yes
<b>54. Program ProFessional 6:</b> Yes		<b>63. Cross-section of conductors CU [mm²]:</b> 2,5
<b>55. Program ProFessional 8:</b> Yes		<b>64. Water supply connection:</b> 3/4"
<b>56. Program ProFessional 10:</b> Yes		<b>65. Diameter nominal:</b> DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

**57. Program ProClean:** 

Yes