

Technical data sheet

Product features



Bain marie trolley electric GN 4-1/1 controllers on shorter side with rack

Model	SAP Code	00000082
BMPK 4120	A group of articles - web	Pasta cookers and Bain Marine



- Drain: Yes
- Material: AISI 304 top plate, AISI 430 cladding
- Protection of controls: IPX4
- Maximum device temperature [°C]: 90
- Device properties: Warmed

SAP Code	00000082	Power electric [kW]	2.800
Net Width [mm]	598	Loading	230 V / 1N - 50 Hz
Net Depth [mm]	1677	Number of GN / EN	4
Net Height [mm]	905	GN / EN size in device	GN 1/1
Net Weight [kg]	69.00	GN device depth	200


Technical data sheet

Technical drawing



Bain marie trolley electric GN 4-1/1 controllers on shorter side with rack

Model	SAP Code	00000082
BMPK 4120	A group of articles - web	Pasta cookers and Bain Marine

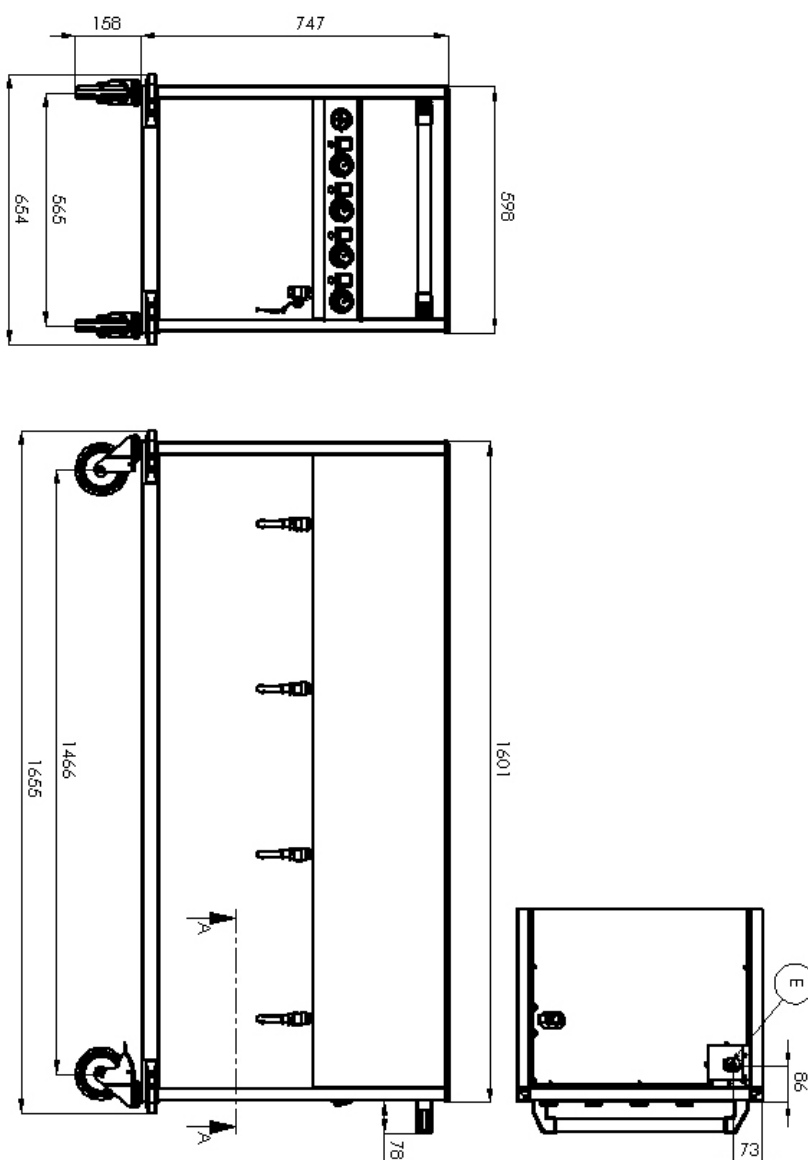

Technical data sheet

Product benefits



Bain marie trolley electric GN 4-1/1 controllers on shorter side with rack

Model	SAP Code	00000082
BMPK 4120	A group of articles - web	Pasta cookers and Bain Marine

1

Shelf

greater strength

2

Braked wheels

easy to control

3

Deep-draft bathtubs

basins without sharp transitions, edges and corners

4

Controlling each bath separately

variability of use

5

All-stainless steel construction

variability of use

6

Drain valve under the bathtub

safer placement of the drain valve

7

Handrail

handle made of robust stainless steel tube
possibility of placement on the shorter or longer side

Technical data sheet

Technical parameters



Bain marie trolley electric GN 4-1/1 controllers on shorter side with rack

Model	SAP Code	00000082
BMPK 4120	A group of articles - web	Pasta cookers and Bain Marine

1. SAP Code:

00000082

2. Net Width [mm]:

598

3. Net Depth [mm]:

1677

4. Net Height [mm]:

905

5. Net Weight [kg]:

69.00

6. Gross Width [mm]:

730

7. Gross depth [mm]:

1700

8. Gross Height [mm]:

1010

9. Gross Weight [kg]:

92.00

10. Device type:

Electric unit

11. Construction type of device:

On wheels

12. Power electric [kW]:

2.800

13. Loading:

230 V / 1N - 50 Hz

14. Protection of controls:

IPX4

15. Exterior color of the device:

Stainless steel

16. Material:

AISI 304 top plate, AISI 430 cladding

17. Maximum device temperature [°C]:

90

18. Minimum device temperature [°C]:

30

19. Adjustable feet:

No

20. Drain:

Yes

21. Number of GN / EN:

4

22. GN / EN size in device:

GN 1/1

23. GN device depth:

200

24. Cross-section of conductors CU [mm²]:

0,75

25. Device properties:

Warmed