

# Technical data sheet

## Product features



### Bain marie trolley electric GN 2-1/1 heated cupboard controllers on shorter side

|               |                                  |                               |
|---------------|----------------------------------|-------------------------------|
| <b>Model</b>  | <b>SAP Code</b>                  | 00008660                      |
| BMPK 2120 CSH | <b>A group of articles - web</b> | Pasta cookers and Bain Marine |



- Drain: Yes
- Material: AISI 304 top plate, AISI 430 cladding
- Protection of controls: IPX4
- Maximum device temperature [°C]: 90
- Device properties: Warmed

|                        |          |                               |                    |
|------------------------|----------|-------------------------------|--------------------|
| <b>SAP Code</b>        | 00008660 | <b>Power electric [kW]</b>    | 2.200              |
| <b>Net Width [mm]</b>  | 598      | <b>Loading</b>                | 230 V / 1N - 50 Hz |
| <b>Net Depth [mm]</b>  | 874      | <b>Number of GN / EN</b>      | 2                  |
| <b>Net Height [mm]</b> | 905      | <b>GN / EN size in device</b> | GN 1/1             |
| <b>Net Weight [kg]</b> | 76.00    | <b>GN device depth</b>        | 200                |




# Technical data sheet

Technical drawing



## Bain marie trolley electric GN 2-1/1 heated cupboard controllers on shorter side

|               |                                  |                               |
|---------------|----------------------------------|-------------------------------|
| <b>Model</b>  | <b>SAP Code</b>                  | 00008660                      |
| BMPK 2120 CSH | <b>A group of articles - web</b> | Pasta cookers and Bain Marine |

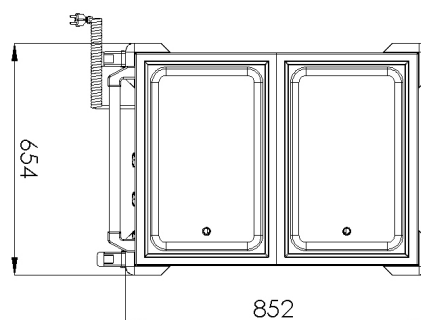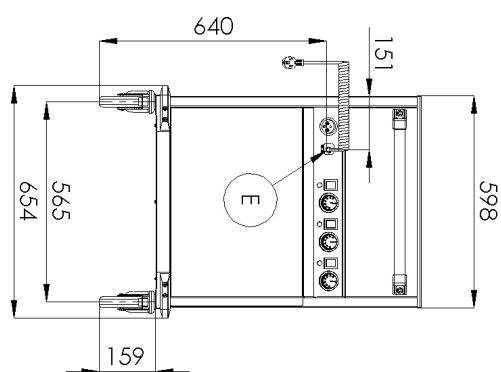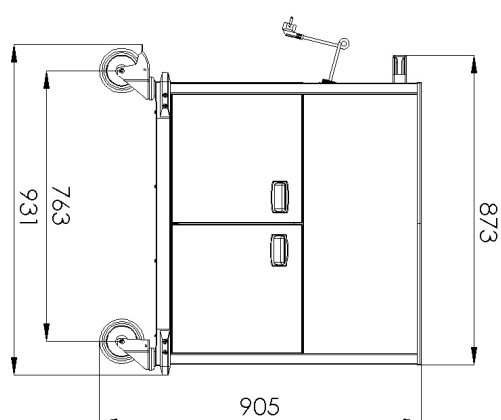

# Technical data sheet

## Product benefits



### Bain marie trolley electric GN 2-1/1 heated cupboard controllers on shorter side

|               |                                  |                               |
|---------------|----------------------------------|-------------------------------|
| <b>Model</b>  | <b>SAP Code</b>                  | 00008660                      |
| BMPK 2120 CSH | <b>A group of articles - web</b> | Pasta cookers and Bain Marine |

1

#### Deep-draft bathtubs

basins without sharp transitions, edges and corners

- easy maintenance
- perfect sanitation

2

#### Controlling each bath separately

variability of use

- possibility to keep different foods at different temperatures

3

#### All-stainless steel construction

harmless to health for contact with food  
robustness

- perfect sanitation
- long service life

4

#### Heated substructure

possibility to store and heat plates

- space saving
- no need for an extra rack

5

#### Drain valve under the bathtub

safer placement of the drain valve

- valve positioning prevents unintentional contact and possible scalding

6

#### Handrail

handle made of robust stainless steel tube  
possibility of placement on the shorter or longer side

- easy handling of the dispensing tub

7

#### Braked wheels

easier handling

- more comfort for the operator
- safety
- stability

# Technical data sheet

## Technical parameters



### Bain marie trolley electric GN 2-1/1 heated cupboard controllers on shorter side

|                      |                                  |                               |
|----------------------|----------------------------------|-------------------------------|
| <b>Model</b>         | <b>SAP Code</b>                  | 00008660                      |
| <b>BMPK 2120 CSH</b> | <b>A group of articles - web</b> | Pasta cookers and Bain Marine |

**1. SAP Code:**

00008660

**2. Net Width [mm]:**

598

**3. Net Depth [mm]:**

874

**4. Net Height [mm]:**

905

**5. Net Weight [kg]:**

76.00

**6. Gross Width [mm]:**

750

**7. Gross depth [mm]:**

910

**8. Gross Height [mm]:**

1010

**9. Gross Weight [kg]:**

84.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

On wheels

**12. Power electric [kW]:**

2.200

**13. Loading:**

230 V / 1N - 50 Hz

**14. Protection of controls:**

IPX4

**15. Exterior color of the device:**

Stainless steel

**16. Material:**

AISI 304 top plate, AISI 430 cladding

**17. Maximum device temperature [°C]:**

90

**18. Minimum device temperature [°C]:**

30

**19. Adjustable feet:**

No

**20. Drain:**

Yes

**21. Number of GN / EN:**

2

**22. GN / EN size in device:**

GN 1/1

**23. GN device depth:**

200

**24. Cross-section of conductors CU [mm²]:**

0,5

**25. Device properties:**

Warmed