

# Technical data sheet

## Product features



### Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

|              |                                  |                                |
|--------------|----------------------------------|--------------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00038853                       |
| ISN 1021 PD  | <b>A group of articles - web</b> | Šokery a multifunkční zařízení |



- Shock cooling cycle kg / min (+3 ° C): 70/90
- Shock freeze cycle kg / min (-18 ° C): 50/240
- Probe: 4-points
- Insulation thickness [mm]: 60
- Control type: Touchscreen
- Display size: 9"
- User programmable cycles: Yes
- Thaving cycle: Yes

|                            |                    |                                              |             |
|----------------------------|--------------------|----------------------------------------------|-------------|
| <b>SAP Code</b>            | 00038853           | <b>Number of GN / EN</b>                     | 10          |
| <b>Net Width [mm]</b>      | 870                | <b>GN / EN size in device</b>                | GN 2/1      |
| <b>Net Depth [mm]</b>      | 974                | <b>GN device depth</b>                       | 65          |
| <b>Net Height [mm]</b>     | 1650               | <b>Shock cooling cycle kg / min (+3 ° C)</b> | 70/90       |
| <b>Net Weight [kg]</b>     | 183.00             | <b>Shock freeze cycle kg / min (-18 ° C)</b> | 50/240      |
| <b>Power electric [kW]</b> | 0.876              | <b>Control type</b>                          | Touchscreen |
| <b>Loading</b>             | 230 V / 1N - 50 Hz | <b>Noise of device</b>                       | 56          |


# Technical data sheet

Technical drawing



Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

|             |                           |                                |
|-------------|---------------------------|--------------------------------|
| Model       | SAP Code                  | 00038853                       |
| ISN 1021 PD | A group of articles - web | Šokery a multifunkční zařízení |

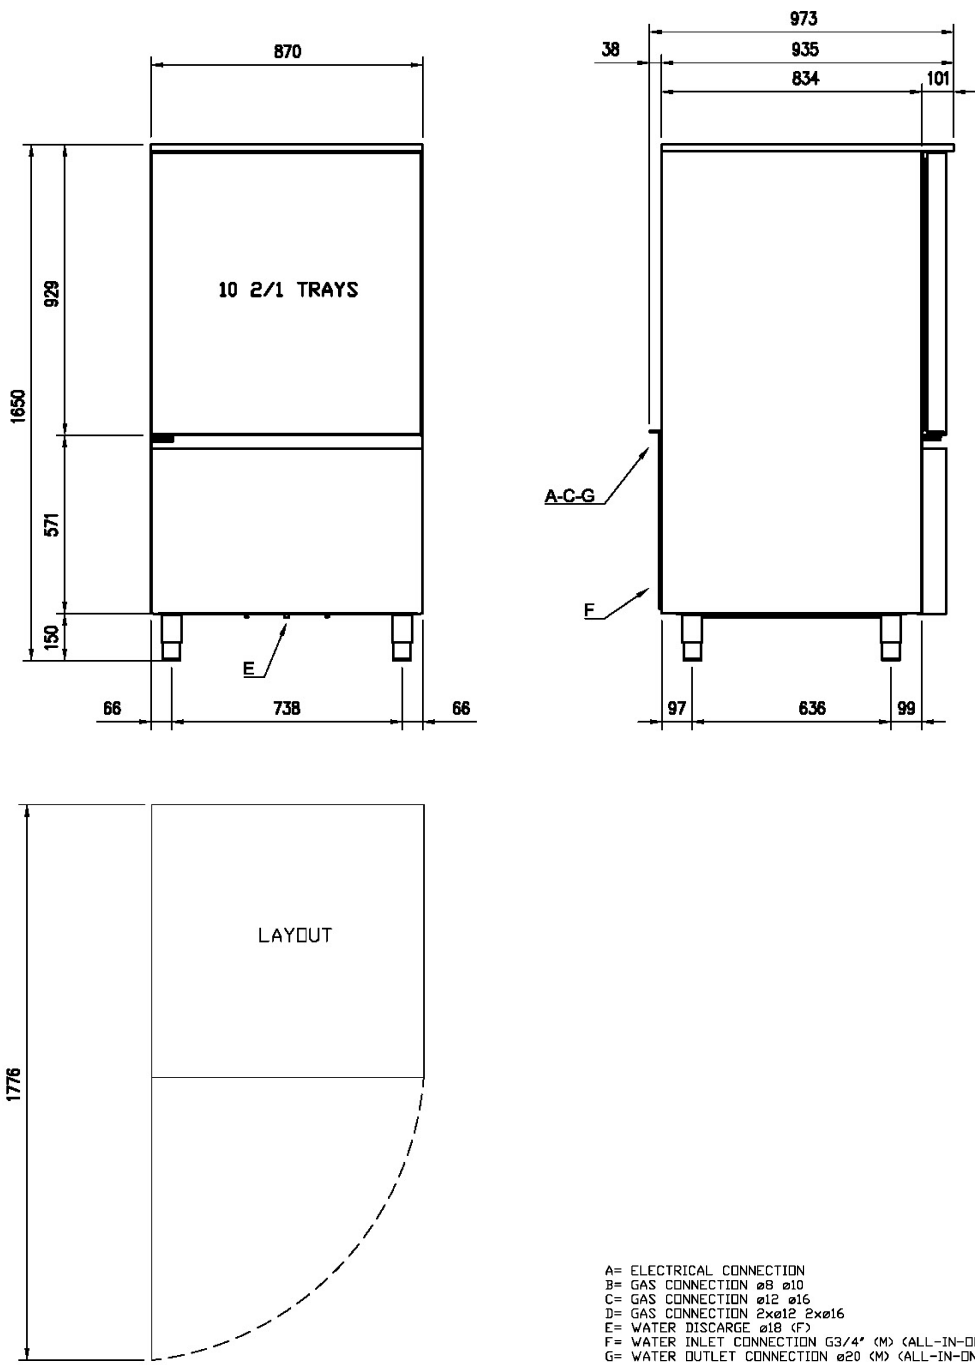

# Technical data sheet

Product benefits



## Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

|              |                                  |                                |
|--------------|----------------------------------|--------------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00038853                       |
| ISN 1021 PD  | <b>A group of articles - web</b> | Šokery a multifunkční zařízení |

1

### Nerezové tělo i vnitřek

odolnost  
hygiena

2

### Sledování parametrů HACCP

snadná evidence všech potřebných parametrů

3

### Vícebodová sonda

precizní sledování teploty chlazení/mrazení

4

### Rozmrazení

připravenost zamražené potraviny na zpracování na čas

# Technical data sheet

## Technical parameters



### Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

|              |                                  |                                |
|--------------|----------------------------------|--------------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00038853                       |
| ISN 1021 PD  | <b>A group of articles - web</b> | Šokery a multifunkční zařízení |

**1. SAP Code:**

00038853

**2. Net Width [mm]:**

870

**3. Net Depth [mm]:**

974

**4. Net Height [mm]:**

1650

**5. Net Weight [kg]:**

183.00

**6. Gross Width [mm]:**

1060

**7. Gross depth [mm]:**

1057

**8. Gross Height [mm]:**

1877

**9. Gross Weight [kg]:**

163.00

**10. Device type:**

Electric unit

**11. Material:**

AISI 304

**12. Exterior color of the device:**

Stainless steel

**13. Opening of device:**

Hinges on the right

**14. Power electric [kW]:**

0.876

**15. Loading:**

230 V / 1N - 50 Hz

**16. Control type:**

Touchscreen

**17. Display size:**

9"

**18. Refrigerant:**

R290

**19. Refrigerant weight [g]:**

0.35

**20. Number of GN / EN:**

10

**21. GN / EN size in device:**

GN 2/1

**22. GN device depth:**

65

**23. Shock freeze cycle kg / min (-18 ° C):**

50/240

**24. Shock cooling cycle kg / min (+3 ° C):**

70/90

**25. Insulation thickness [mm]:**

60

**26. Long-term cooling function:**

Yes

**27. Longterm freezing function:**

Yes

**28. Probe:**

4-points

# Technical data sheet

Technical parameters



## Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

|              |                                  |                                |
|--------------|----------------------------------|--------------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00038853                       |
| ISN 1021 PD  | <b>A group of articles - web</b> | Šokery a multifunkční zařízení |

### 29. Self-diagnostics:

Yes

### 30. Interior lighting:

Yes

### 31. HACCP:

Yes

### 32. Filter:

Removable

### 33. Thaving cycle:

Yes

### 34. User programmable cycles:

Yes

### 35. USB port:

Yes, for HACCP and firmware update

### 36. Castors:

Optional

### 37. Real time monitoring paramaters:

Energy consumption, Chamber temperature, Probe temperature, Graph with the course of temperature and consumption

### 38. Standard equipment for device:

central support for 2 x GN 1/1

### 39. Noise of device:

56

### 40. Cross-section of conductors CU [mm<sup>2</sup>]:

0,5