Technical data sheet

Product features

INFINITY multifunctional device 15x GN 1/1, wheels, Right-hinged door 400 V / 3N		
Model	**SAP Code**	00038868
INFINITY 1511 KL PD N	**A group of articles - web**	Šokery a multifunkční zařízení



- Shock cooling cycle kg / min (+3 ° C): 70/86
- Shock freeze cycle kg / min (-18 ° C): 30/182
- Minimum device temperature [°C]: -40
- Maximum device temperature [°C]: 85
- Probe: 4-bodová
- Insulation thickness [mm]: 60
- Control type: Touchscreen
- Display size: 9”
- User programmable cycles: Yes, with save options
- Defrosting cycle: Yes
- Proving cycle: Yes


SAP Code	00038868	**Number of GN / EN**	15
Net Width [mm]	790	**GN / EN size in device**	GN 1/1
Net Depth [mm]	839	**GN device depth**	65
Net Height [mm]	1990	**Shock cooling cycle kg / min (+3 ° C)**	70/86
Net Weight [kg]	211.00	**Shock freeze cycle kg / min (-18 ° C)**	30/182
Power electric [kW]	2.772	**Control type**	Touchscreen
Loading	400 V / 3N - 50 Hz	**Humidification**	Yes


RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical drawing

INFINITY multifunctional device 15x GN 1/1, wheels, Right-hinged door 400 V / 3N		
Model	**SAP Code**	00038868
INFINITY 1511 KL PD N	**A group of articles - web**	Šokery a multifunkční zařízení

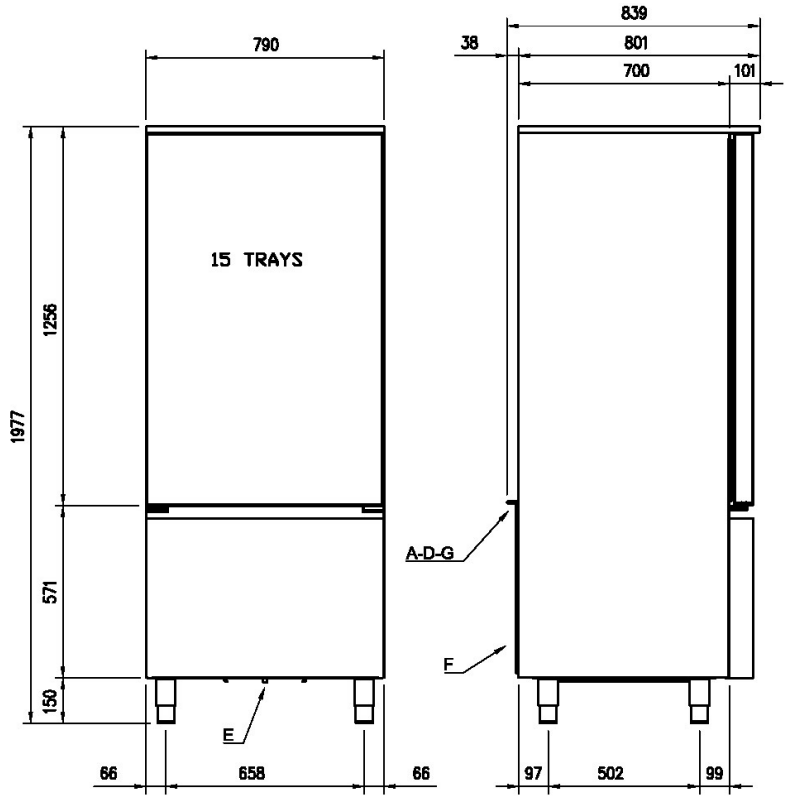

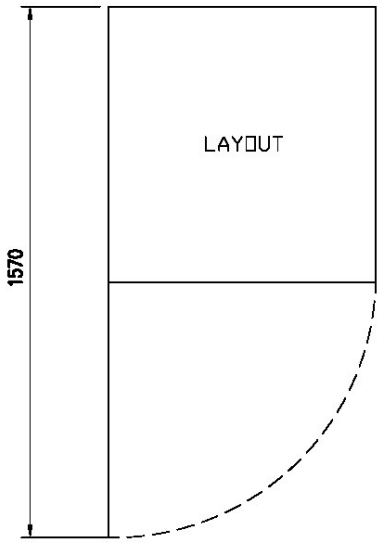

A= ELECTRICAL CONNECTION
B= GAS CONNECTION ø8 ø10
C= GAS CONNECTION ø12 ø16
D= GAS CONNECTION 2xø12 2xø16
E= WATER DISCARGE ø18 (F)
F= WATER INLET CONNECTION G3/4" (M) (ALL-IN-ONE)
G= WATER OUTLET CONNECTION ø20 (M) (ALL-IN-ONE)

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

INFINITY multifunctional device 15x GN 1/1, wheels, Right-hinged door 400 V / 3N		
Model	**SAP Code**	00038868
INFINITY 1511 KL PD N	**A group of articles - web**	Šokery a multifunkční zařízení

1. **SAP Code:**
   00038868
2. **Net Width [mm]:**
   790
3. **Net Depth [mm]:**
   839
4. **Net Height [mm]:**
   1990
5. **Net Weight [kg]:**
   211.00
6. **Gross Width [mm]:**
   830
7. **Gross depth [mm]:**
   860
8. **Gross Height [mm]:**
   2120
9. **Gross Weight [kg]:**
   233.00
10. **Device type:**
    Electric unit
11. **Exterior color of the device:**
    Stainless steel
12. **Opening of device:**
    Hinges on the left
13. **Power electric [kW]:**
    2.772
14. **Loading:**
    400 V / 3N - 50 Hz
15. **Control type:**
    Touchscreen
16. **Display size:**
    9"
17. **Refrigerant:**
    R290
18. **Number of GN / EN:**
    15
19. **GN / EN size in device:**
    GN 1/1
20. **GN device depth:**
    65
21. **Minimum device temperature [°C]:**
    -40
22. **Maximum device temperature [°C]:**
    85
23. **Shock freeze cycle kg / min (-18 ° C):**
    30/182
24. **Shock cooling cycle kg / min (+3 ° C):**
    70/86
25. **Insulation thickness [mm]:**
    60
26. **Long-term cooling function:**
    Yes
27. **Longterm freezing function:**
    Yes
28. **Probe:**
    4-bodová

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

INFINITY multifunctional device 15x GN 1/1, wheels, Right-hinged door 400 V / 3N		
Model	**SAP Code**	00038868
INFINITY 1511 KL PD N	**A group of articles - web**	Šokery a multifunkční zařízení

29. Self-diagnostics:
Yes

30. Interior lighting:
Yes

31. HACCP:
Yes

32. Low temperature heat treatment:
Yes

33. Low temperature cooking span [°C]:
52 - 85

34. Defrosting cycle:
Yes

35. Proving cycle:
Yes

36. Adjustable feet:
Yes

37. User programmable cycles:
Yes, with save options

38. USB port:
Yes, for HACCP and firmware update

39. Real time monitoring paramaters:
Energy consumption, Chamber temperature, Probe temperature, Graph with the course of temperature and consumption

40. Drain connection:
Yes

41. Cross-section of conductors CU [mm²]:
1

42. Humidification:
Yes

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062