

Technical data sheet

Product features



Ice maker hollow ice cube 40 air cooling with drain pump

Model	SAP Code	00020496
IMK 11260 ADP	A group of articles - web	Ice makers



- Cooling type: Air
- Max ambient temperature [°C]: 43
- Min ambient temperature [°C]: 10
- Type of ice: Hatter
- Weight of ice [g]: 22.00
- Production per day [kg]: 112
- Water consumption [l/h]: 14.10
- Container for ice: Yes
- Ice storage capacity [kg]: 60
- Material: AISI 304

SAP Code	00020496	Cooling type	Air
Net Width [mm]	715	Water consumption [l/h]	14.10
Net Depth [mm]	700	Production per day [kg]	112
Net Height [mm]	1044	Type of ice	Hatter
Net Weight [kg]	81.00	Weight of ice [g]	22.00
Power electric [kW]	0.934	Ice storage capacity [kg]	60
Loading	230 V / 1N - 50 Hz	Drain pump	Yes





Technical data sheet

Technical drawing



Ice maker hollow ice cube 40 air cooling with drain pump

Model	SAP Code	00020496
IMK 11260 ADP	A group of articles - web	Ice makers

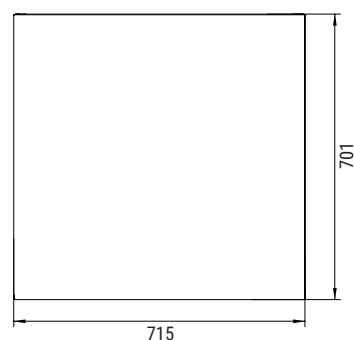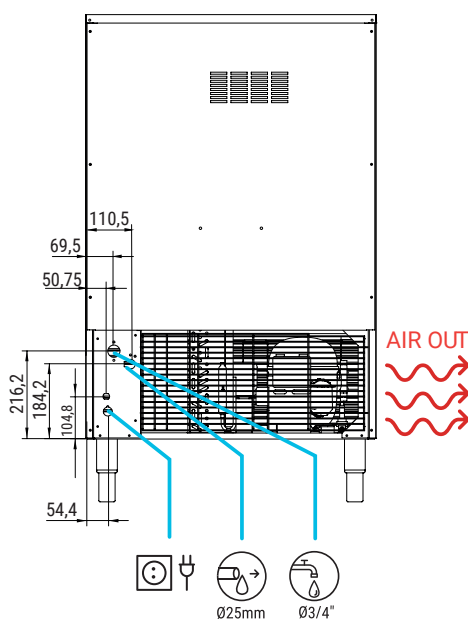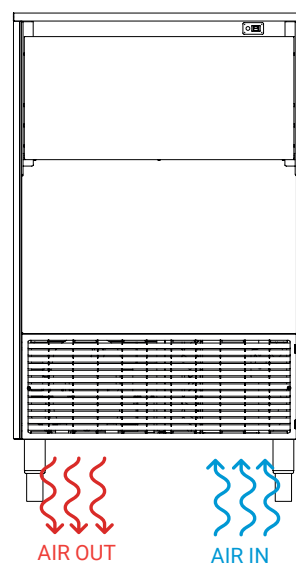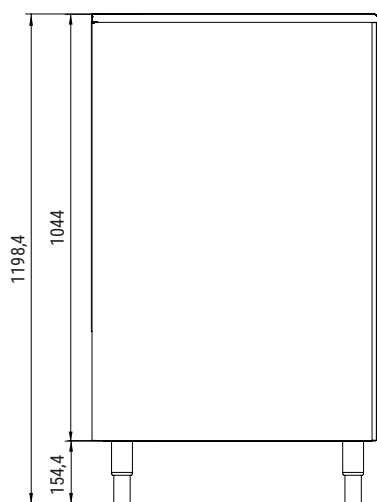

* All measurements in mm.
* Todas las cotas en mm.

Technical data sheet

Product benefits



Ice maker hollow ice cube 40 air cooling with drain pump

Model	SAP Code	00020496
IMK 11260 ADP	A group of articles - web	Ice makers

1

Firm and crystal clear ice hats

icy hats without dirt

- health safety and aesthetic impression

2

A3S: System with flexible nozzles with minor vibrations

prevents limescale from settling.

- longer life of the device without the need to remove scale

3

SFVS front ventilation

allows the units of the unit to the interior

- variability of the location of the device

4

Cleaning switch

disconnects the cooling system when circulating water with a limescale removal product

- saving human work and time

5

Motor pump “NEVER STOP” (construction without seal)

prevents depreciation in hard water

- longer life of the device without the need to remove scale = economic and time savings

6

EASI: Installation and service system - all panels can be removed separately

easy access for installation and service.

- saving time, human work, costs

7

Printed circuit board at the bottom

easy service

- saving time and human work

8

Tropical version of the machine (class t)

adaptation to extreme climatic conditions.

- use in extreme climatic conditions

9

Stif: a construction supported by 4 -steel columns

strength

- the possibility of higher loads and a difficult deformation

Technical data sheet

Technical parameters



Ice maker hollow ice cube 40 air cooling with drain pump

Model	SAP Code	00020496
IMK 11260 ADP	A group of articles - web	Ice makers

1. SAP Code:

00020496

2. Net Width [mm]:

715

3. Net Depth [mm]:

700

4. Net Height [mm]:

1044

5. Net Weight [kg]:

81.00

6. Gross Width [mm]:

790

7. Gross depth [mm]:

770

8. Gross Height [mm]:

1180

9. Gross Weight [kg]:

91.00

10. Device type:

Electric unit

11. Power electric [kW]:

0.934

12. Loading:

230 V / 1N - 50 Hz

13. Refrigerant:

R290

14. Cooling type:

Air

15. Material:

AISI 304

16. Exterior color of the device:

Stainless steel

17. Min ambient temperature [°C]:

10

18. Max ambient temperature [°C]:

43

19. Additional information:

Max. height with legs 1199 mm

20. Production per day [kg]:

112

21. Water consumption [l/h]:

14.10

22. Door of device:

Full

23. Type of ice:

Hatter

– Kloboučkový

24. Weight of ice [g]:

22.00

25. Container for ice:

Yes

26. Ice storage capacity [kg]:

60

27. Drain pump:

Yes

28. Cross-section of conductors CU [mm²]:

0,5

Technical data sheet

Technical parameters



Ice maker hollow ice cube 40 air cooling with drain pump

Model	SAP Code	00020496
IMK 11260 ADP	A group of articles - web	Ice makers

29. Water supply connection:

3/4"

30. Diameter nominal:

DN 50