



Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 850
- Rack size [mm]: 700 x 700
- Water consumption of the washing cycle [l/basket]: 4
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011973	Boiler capacity [l]	12.00
Net Width [mm]	850	Boiler power [kW]	8.000
Net Depth [mm]	850	Basin volume [l]	68
Net Height [mm]	1930	Tank power [kW]	8.000
Net Weight [kg]	181.00	Water consumption of the washing cycle [l/basket]	4
Power electric [kW]	18.700	Door clear height [mm]	850
Loading	400 V / 3N - 50 Hz	Rack size [mm]	700 x 700



Technical drawing

Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

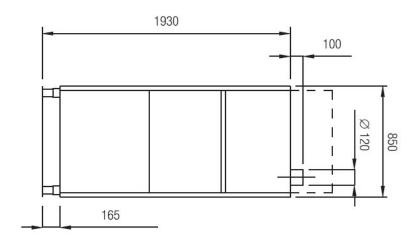

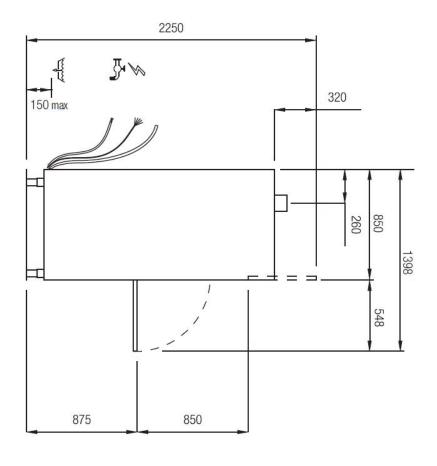





Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction round construction with stainless steel, rounded edges, Deep-drawn bathtub

2 Stainless steel washing arms
upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

3 LED Display smartScreen, a large color graphic display showing the washing progress

Double pump
unique two-way DuoFlow pump

Detergent dispensers two detergent and rinse aid dispensers

Double filter system
the chamber filter and the waste filter together with the
ArchiMedes system provide a discharge system with
increased water purification efficiency

Energy saving energy saving system due to lowering the temperature of the boiler

Protection of fragile dishes
softstart system for gradual start of washing programs to protect fragile dishes

Double shell constructionstainless steel construction with insulated double jacket

Fast heating

Air break tank

performance management allows the current running of the boiler and basins body

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse



Technical parameters

Pot and pan washer double skin	with drain pump 70x	70 - 400 V
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011973		15. Number of programs:
2. Net Width [mm]: 850		16. Opening of device: Tilting down
3. Net Depth [mm]: 850		17. Door clear height [mm]: 850
4. Net Height [mm]: 1930		18. Inlet pressure [bar]:
5. Net Weight [kg]: 181.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 1000		20. Number of skin:
7. Gross depth [mm]: 950		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Boiler capacity [l]: 12.00
9. Gross Weight [kg]: 191.00		23. Boiler power [kW]: 8.000
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 8.000
12. Material: AISI 304		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 18.700		27. Arm connection: Hand loosen/tighten screw
14. Loading:		28. Washing arm type:

400 V / 3N - 50 Hz

Rotating trident



Technical parameters

Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Washing arm material: Stainless steel		40. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature
30. Atmospheric boiler with rinse pump: Yes		41. Rinse system: UltraRinse2 - stainless steel rinsing arms including stainless steel nozzles with a geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure
31. Rinsing arm type: Rotating trident		42. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
32. Rinsing arm material: Stainless steel		43. Quick heating system: QuickReady - System for rapid heating of water in the tank
33. Deep drawn tank: Yes		44. Hot water electric valve: Yes
34. Rack support: Pressed		45. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
35. Tank surface strainers: stainless steel		46. Rack size [mm]: 700 × 700
36. Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		47. Display type: LCD multifunction display
37. Thermostop: Yes		48. USB port: Yes, for Firmware actualisation
38. Boiler thermostat adjust: Yes		49. Drain pump: Yes

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

50. Self-diagnostics:

Yes



Technical parameters

Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
51. Wash pump type: two-way - DuoFlow		61. Program ProClean: Yes
52. Detergent dispenser: Yes		62. Program ProDrain: Yes
53. Rinse aid dispenser: Yes		63. Program ProEco: Yes
54. Water consumption of the washing cycle [l/basket]:		64. Program ProLong: Yes
55. Rinse water temperature [°C]: 80-85		65. Program ProActive 5: Yes
56. Program ProFessional 2: Yes		66. Program ProActive 7: Yes
57. Program ProFessional 4: Yes		67. Cross-section of conductors CU [mm²]:
58. Program ProFessional 6: Yes		68. Water supply connection: 3/4"
59. Program ProFessional 8: Yes		69. Diameter nominal: DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

60. Program ProFessional 10:

Yes