

Technical data sheet

Product features



Undercounter dishwasher double skin 50x60 - 400 V

Model	SAP Code	00014554
NT 93	A group of articles - web	Undercounter, continuous and black ware dishwasher



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: ProScreen - 4 digit display + 2 LED bars
- Number of programs: 9
- Number of skin: 2
- Door clear height [mm]: 400
- Rack size [mm]: 500 x 600
- Drain pump: No
- Water consumption of the washing cycle [l/basket]: 2,4-3,5
- Washing cycle time [s/basket]: 120 - 20
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00014554	Boiler power [kW]	7.000
Net Width [mm]	600	Basin volume [l]	23
Net Depth [mm]	700	Tank power [kW]	2.100
Net Height [mm]	850	Water consumption of the washing cycle [l/basket]	2,4-3,5
Net Weight [kg]	61.00	Washing cycle time [s/basket]	120 - 20
Power electric [kW]	9.800	Door clear height [mm]	400
Loading	400 V / 3N - 50 Hz	Rack size [mm]	500 x 600
Boiler capacity [l]	6.00	Noise of device	48,9



Technical data sheet

Technical drawing



Undercounter dishwasher double skin 50x60 - 400 V

Model	SAP Code	00014554
NT 93	A group of articles - web	Undercounter, continuous and black ware dishwasher

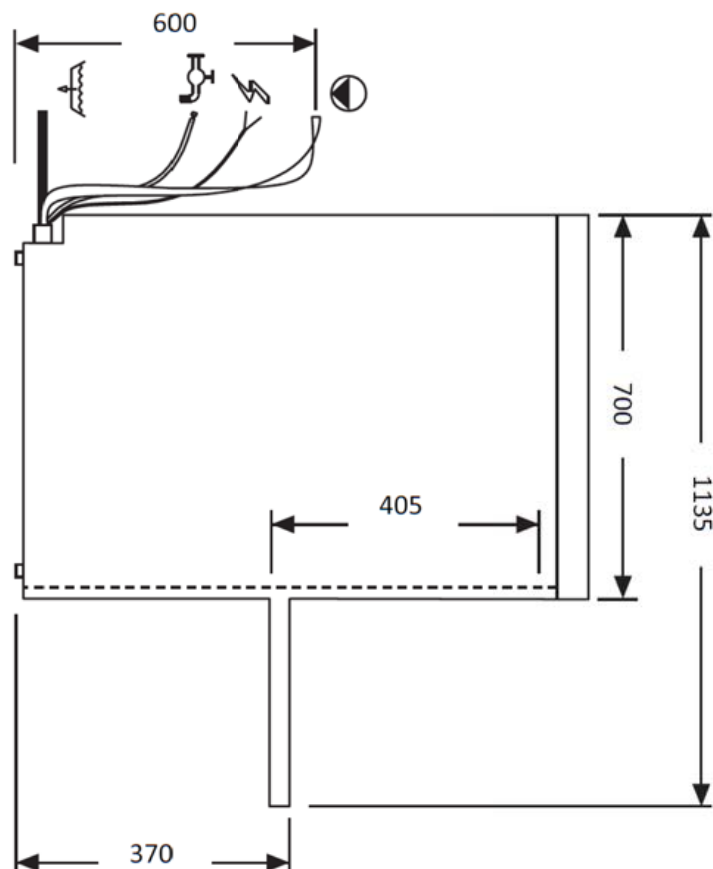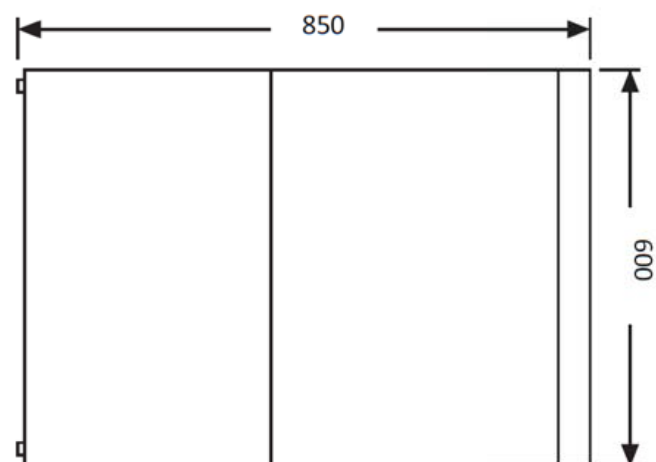

Technical data sheet

Technical parameters



Undercounter dishwasher double skin 50x60 - 400 V

Model	SAP Code	00014554
NT 93	A group of articles - web	Undercounter, continuous and black ware dishwasher

1. SAP Code:

00014554

2. Net Width [mm]:

600

3. Net Depth [mm]:

700

4. Net Height [mm]:

850

5. Net Weight [kg]:

61.00

6. Gross Width [mm]:

700

7. Gross depth [mm]:

800

8. Gross Height [mm]:

1000

9. Gross Weight [kg]:

67.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

Stainless steel

13. Power electric [kW]:

9.800

14. Loading:

400 V / 3N - 50 Hz

15. Additional information:

Also possible: 230 V / 3N or 230 V / 1N (must be specified when ordering)

16. Rack size [mm]:

500 x 600

17. Number of programs:

9

18. Door clear height [mm]:

400

19. Inlet pressure [bar]:

2-4

20. Adjustable feet:

Yes

21. Number of skin:

2

22. Self-cleaning cycle:

Yes

23. Boiler capacity [l]:

6.00

24. Boiler power [kW]:

7.000

25. Basin volume [l]:

23

26. Tank power [kW]:

2.100

27. Number of arms for both rinsing and washing:

2

28. Arm connection:

Click-clack - easy removal with one hand

Technical data sheet

Technical parameters



Undercounter dishwasher double skin 50x60 - 400 V

Model	SAP Code	00014554
NT 93	A group of articles - web	Undercounter, continuous and black ware dishwasher

29. Washing arm type:

Rotatable two-pronged

30. Washing arm material:

Composite

31. Rinsing arm type:

Rotating two-pronged

32. Rinsing arm material:

Composite

33. Deep drawn tank:

Yes

34. Rack support:

Pressed

35. Tank surface strainers:

composite

36. Drain filter:

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

37. Thermostop:

Yes

38. Boiler thermostat adjust:

Yes

39. Rack feed capacity:

15 - 30

40. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

41. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

42. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

43. Hot water electric valve:

Yes

44. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

45. Display type:

ProScreen - 4 digit display + 2 LED bars

46. USB port:

Yes, for Firmware actualisation

47. Drain pump:

No

48. Self-diagnostics:

Yes

49. Wash pump type:

two-way - DuoFlow

50. Detergent dispenser:

Yes

51. Rinse aid dispenser:

Yes

52. Water consumption of the washing cycle [l/basket]:

2,4-3,5

Technical data sheet

Technical parameters



Undercounter dishwasher double skin 50x60 - 400 V

Model	SAP Code	00014554
NT 93	A group of articles - web	Undercounter, continuous and black ware dishwasher

53. Washing cycle time [s/basket]:

120 - 20

54. Rinse water temperature [°C]:

80-85

55. Standard equipment for device:

Basket 500 x 600 mm; stainless steel insert for GN is not part of the dishwasher

56. Program ProFessional 2:

Yes

57. Program ProFessional 4:

Yes

58. Program ProFessional 6:

Yes

59. Program ProSelf:

Yes

60. Program ProEco:

Yes

61. Program ProLong:

Yes

62. Program ProPlates:

Yes

63. Program ProActive 5:

Yes

64. Program ProActive 7:

Yes

65. Noise of device:

48,9

66. Cross-section of conductors CU [mm²]:

2

67. Water supply connection:

3/4"

68. Diameter nominal:

DN 50