Technical data sheet

Product features

Ice maker hollow ice cube 22 g air cooling with drain pump 37 kg/24h 230 V / 1N

Model	SAP Code	00018538
IMK 4020 ADP	A group of articles - web	Ice makers



- Cooling type: Air
- Max ambient temperature [°C]: 43
- Min ambient temperature [°C]: 10
- Type of ice: Hatter
- Weight of ice [g]: 22.00
- Production per day [kg]: 37
- Water consumption [l/h]: 4.00
- Container for ice: Yes
- Ice storage capacity [kg]: 20
- Material: AISI 304


SAP Code	00018538	**Cooling type**	Air
Net Width [mm]	465	**Water consumption [l/h]**	4.00
Net Depth [mm]	595	**Production per day [kg]**	37
Net Height [mm]	789	**Type of ice**	Hatter
Net Weight [kg]	41.00	**Weight of ice [g]**	22.00
Power electric [kW]	0.376	**Ice storage capacity [kg]**	20
Loading	230 V / 1N - 50 Hz	**Drain pump**	Yes


RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062


Technical data sheet


Technical drawing

Ice maker hollow ice cube 22 g air cooling with drain pump 37 kg/24h 230 V / 1N		
Model	**SAP Code**	00018538
IMK 4020 ADP	**A group of articles - web**	Ice makers

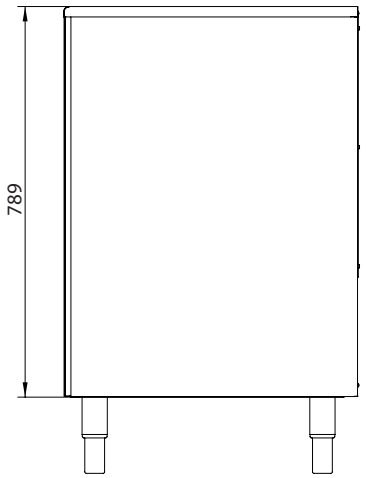

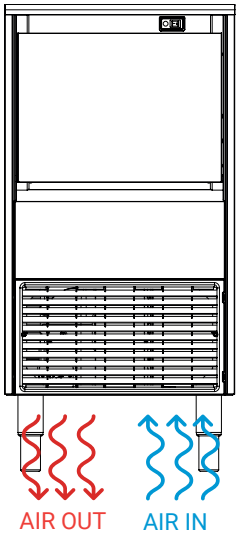

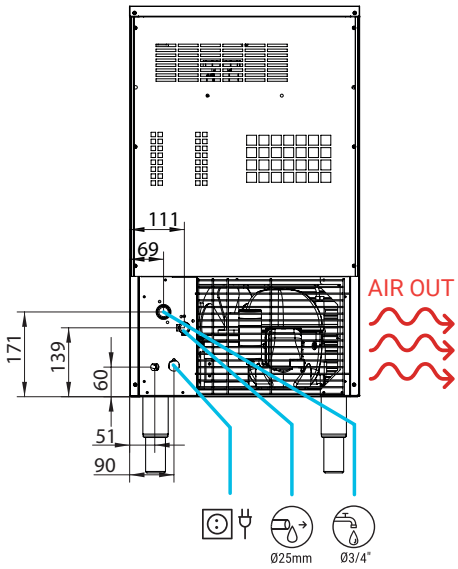

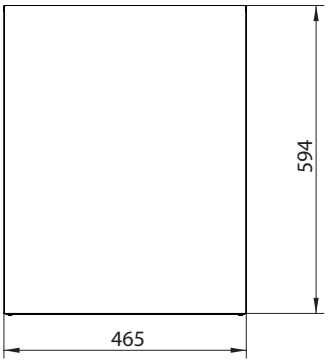

* All measurements in mm.
* Todas las cotas en mm.

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Product benefits

Ice maker hollow ice cube 22 g air cooling with drain pump 37 kg/24h 230 V / 1N

Model	SAP Code	00018538
IMK 4020 ADP	A group of articles - web	Ice makers

1 **Firm and crystal clear ice hats**

icy hats without dirt

– health safety and aesthetic impression

2 **A3S: System with flexible nozzles with minor vibrations**

prevents limescale from settling.

– longer life of the device without the need to remove scale

3 **SFVS front ventilation**

allows the units of the unit to the interior

– variability of the location of the device

4 **Cleaning switch**

disconnects the cooling system when circulating water with a limescale removal product

– saving human work and time

5 **Motor pump “NEVER STOP” (construction without seal)**

prevents depreciation in hard water

– longer life of the device without the need to remove scale = economic and time savings

6 **EASI: Installation and service system - all panels can be removed separately**

easy access for installation and service.

– saving time, human work, costs

7 **Printed circuit board at the bottom**

easy service

– saving time and human work

8 **Tropical version of the machine (class t)**

adaptation to extreme climatic conditions.

– use in extreme climatic conditions

9 **Stif: a construction supported by 4 -steel columns**

strength

– the possibility of higher loads and a difficult deformation

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Ice maker hollow ice cube 22 g air cooling with drain pump 37 kg/24h 230 V / 1N

Model	SAP Code	00018538
IMK 4020 ADP	A group of articles - web	Ice makers

1. **SAP Code:**
   00018538
2. **Net Width [mm]:**
   465
3. **Net Depth [mm]:**
   595
4. **Net Height [mm]:**
   789
5. **Net Weight [kg]:**
   41.00
6. **Gross Width [mm]:**
   540
7. **Gross depth [mm]:**
   650
8. **Gross Height [mm]:**
   920
9. **Gross Weight [kg]:**
   56.00
10. **Device type:**
    Electric unit
11. **Power electric [kW]:**
    0.376
12. **Loading:**
    230 V / 1N - 50 Hz
13. **Refrigerant:**
    R290
14. **Cooling type:**
    Air
15. **Material:**
    AISI 304
16. **Min ambient temperature [°C]:**
    10
17. **Max ambient temperature [°C]:**
    43
18. **Production per day [kg]:**
    37
19. **Water consumption [l/h]:**
    4.00
20. **Door of device:**
    Full
21. **Type of ice:**
    Hatter
    - Kloboučkový
22. **Weight of ice [g]:**
    22.00
23. **Container for ice:**
    Yes
24. **Ice storage capacity [kg]:**
    20
25. **Drain pump:**
    Yes
26. **Cross-section of conductors CU [mm²]:**
    0,5
27. **Water supply connection:**
    3/4"
28. **Diameter nominal:**
    DN 50

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062